


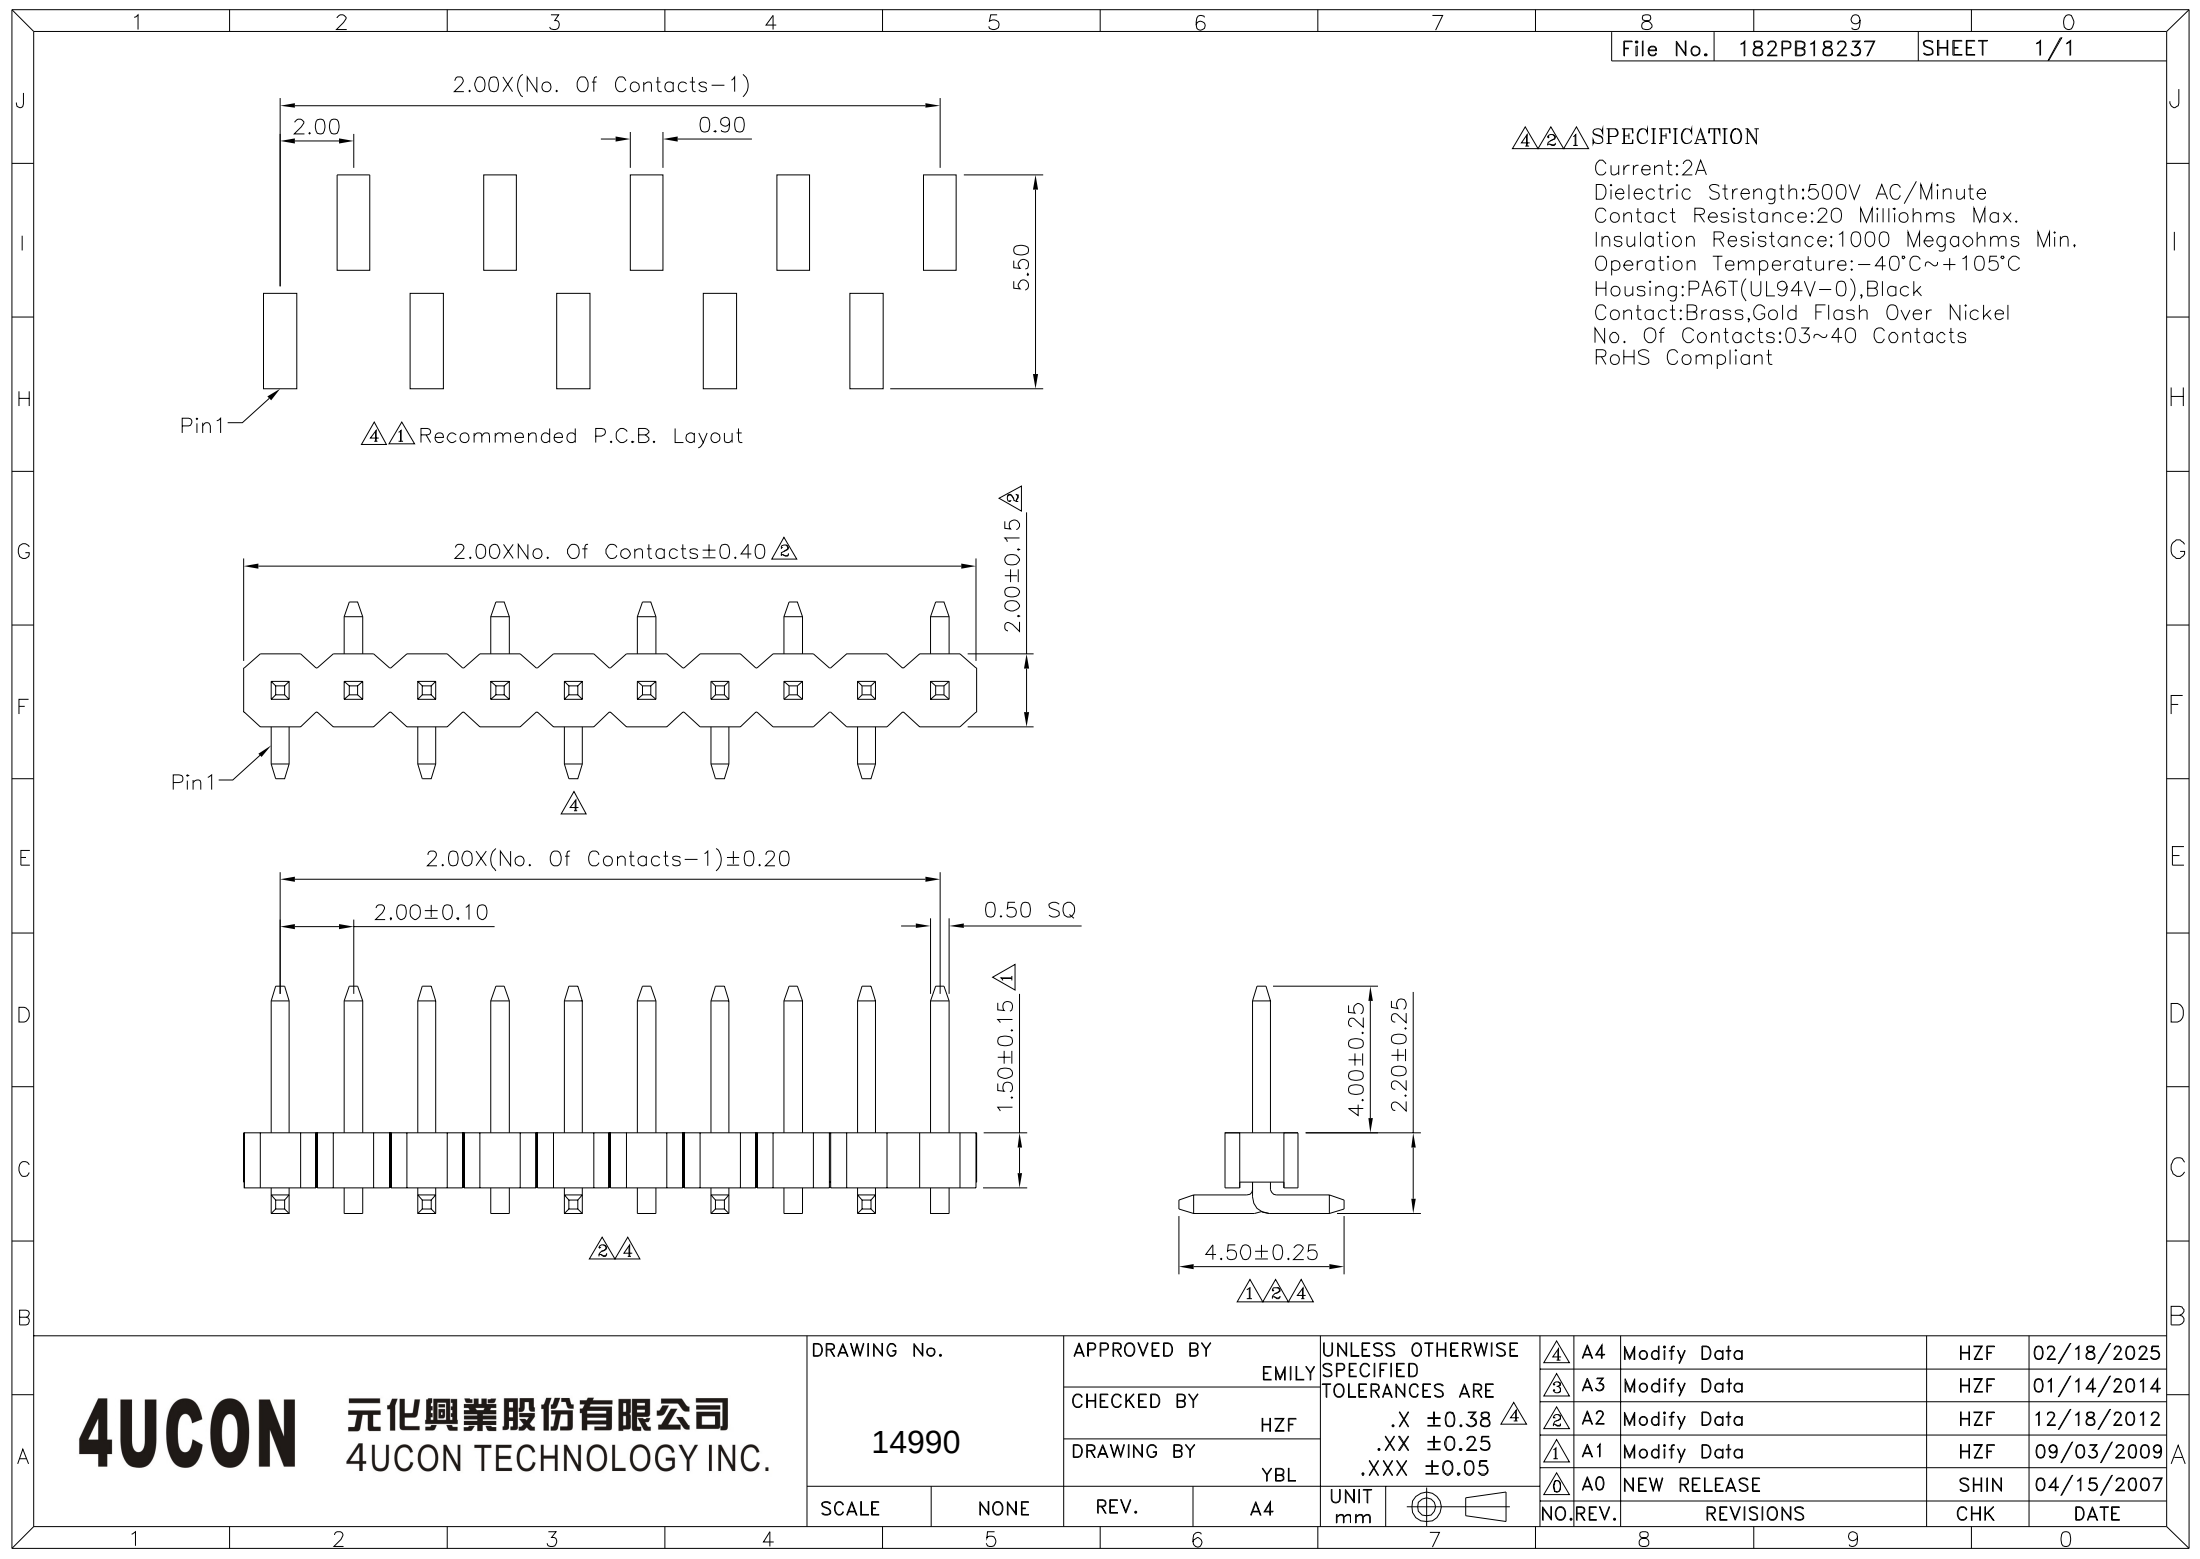

4-2-1 SPECIFICATION

Current:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

4U CON

元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

14990

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A4


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

.XXX ± 0.05

UNIT
mm



4 A4

Modify Data

HZF

02/18/2025

3 A3

Modify Data

HZF

01/14/2014

2 A2

Modify Data

HZF

12/18/2012

1 A1

Modify Data

HZF

09/03/2009

0 A0

NEW RELEASE

SHIN

04/15/2007

NO. REV.

REVISIONS

CHK

DATE