


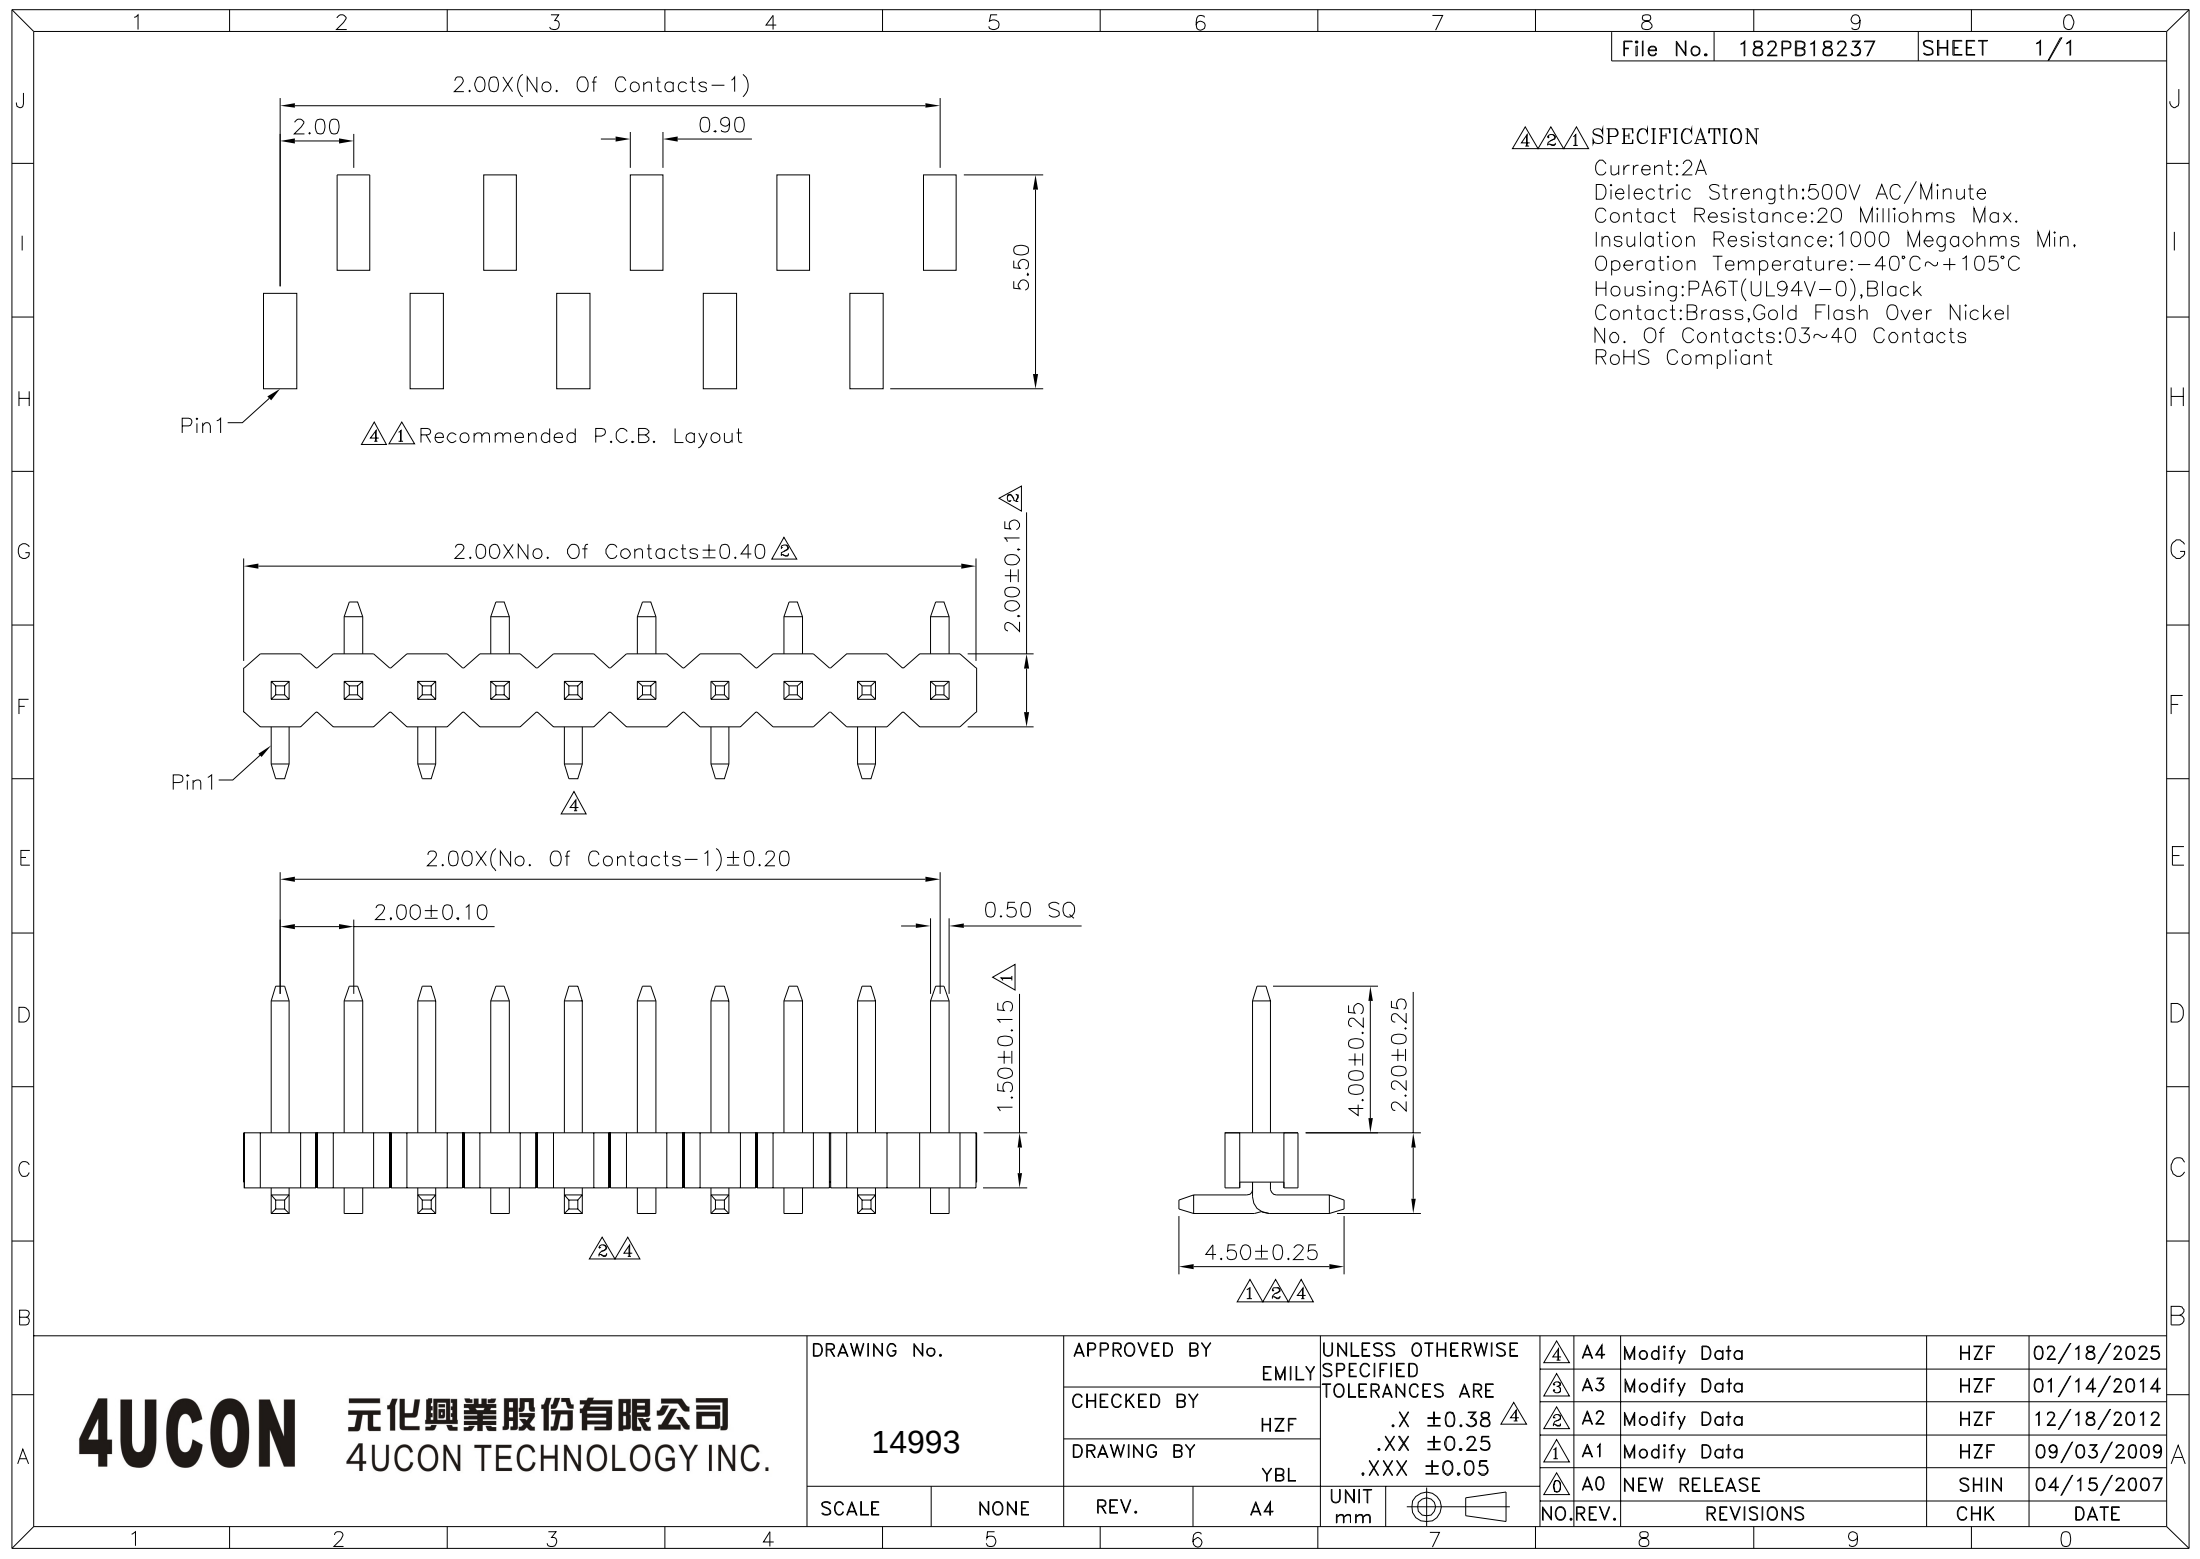

421 SPECIFICATION

Current:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

41 Recommended P.C.B. Layout

4

24

124

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14993

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A4


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 4

.XX ±0.25

.XXX ±0.05

UNIT
mm



4 A4

Modify Data

HZF

02/18/2025

3 A3

Modify Data

HZF

01/14/2014

2 A2

Modify Data

HZF

12/18/2012

1 A1

Modify Data

HZF

09/03/2009

0 A0

NEW RELEASE

SHIN

04/15/2007

NO. REV.

REVISIONS

CHK

DATE