


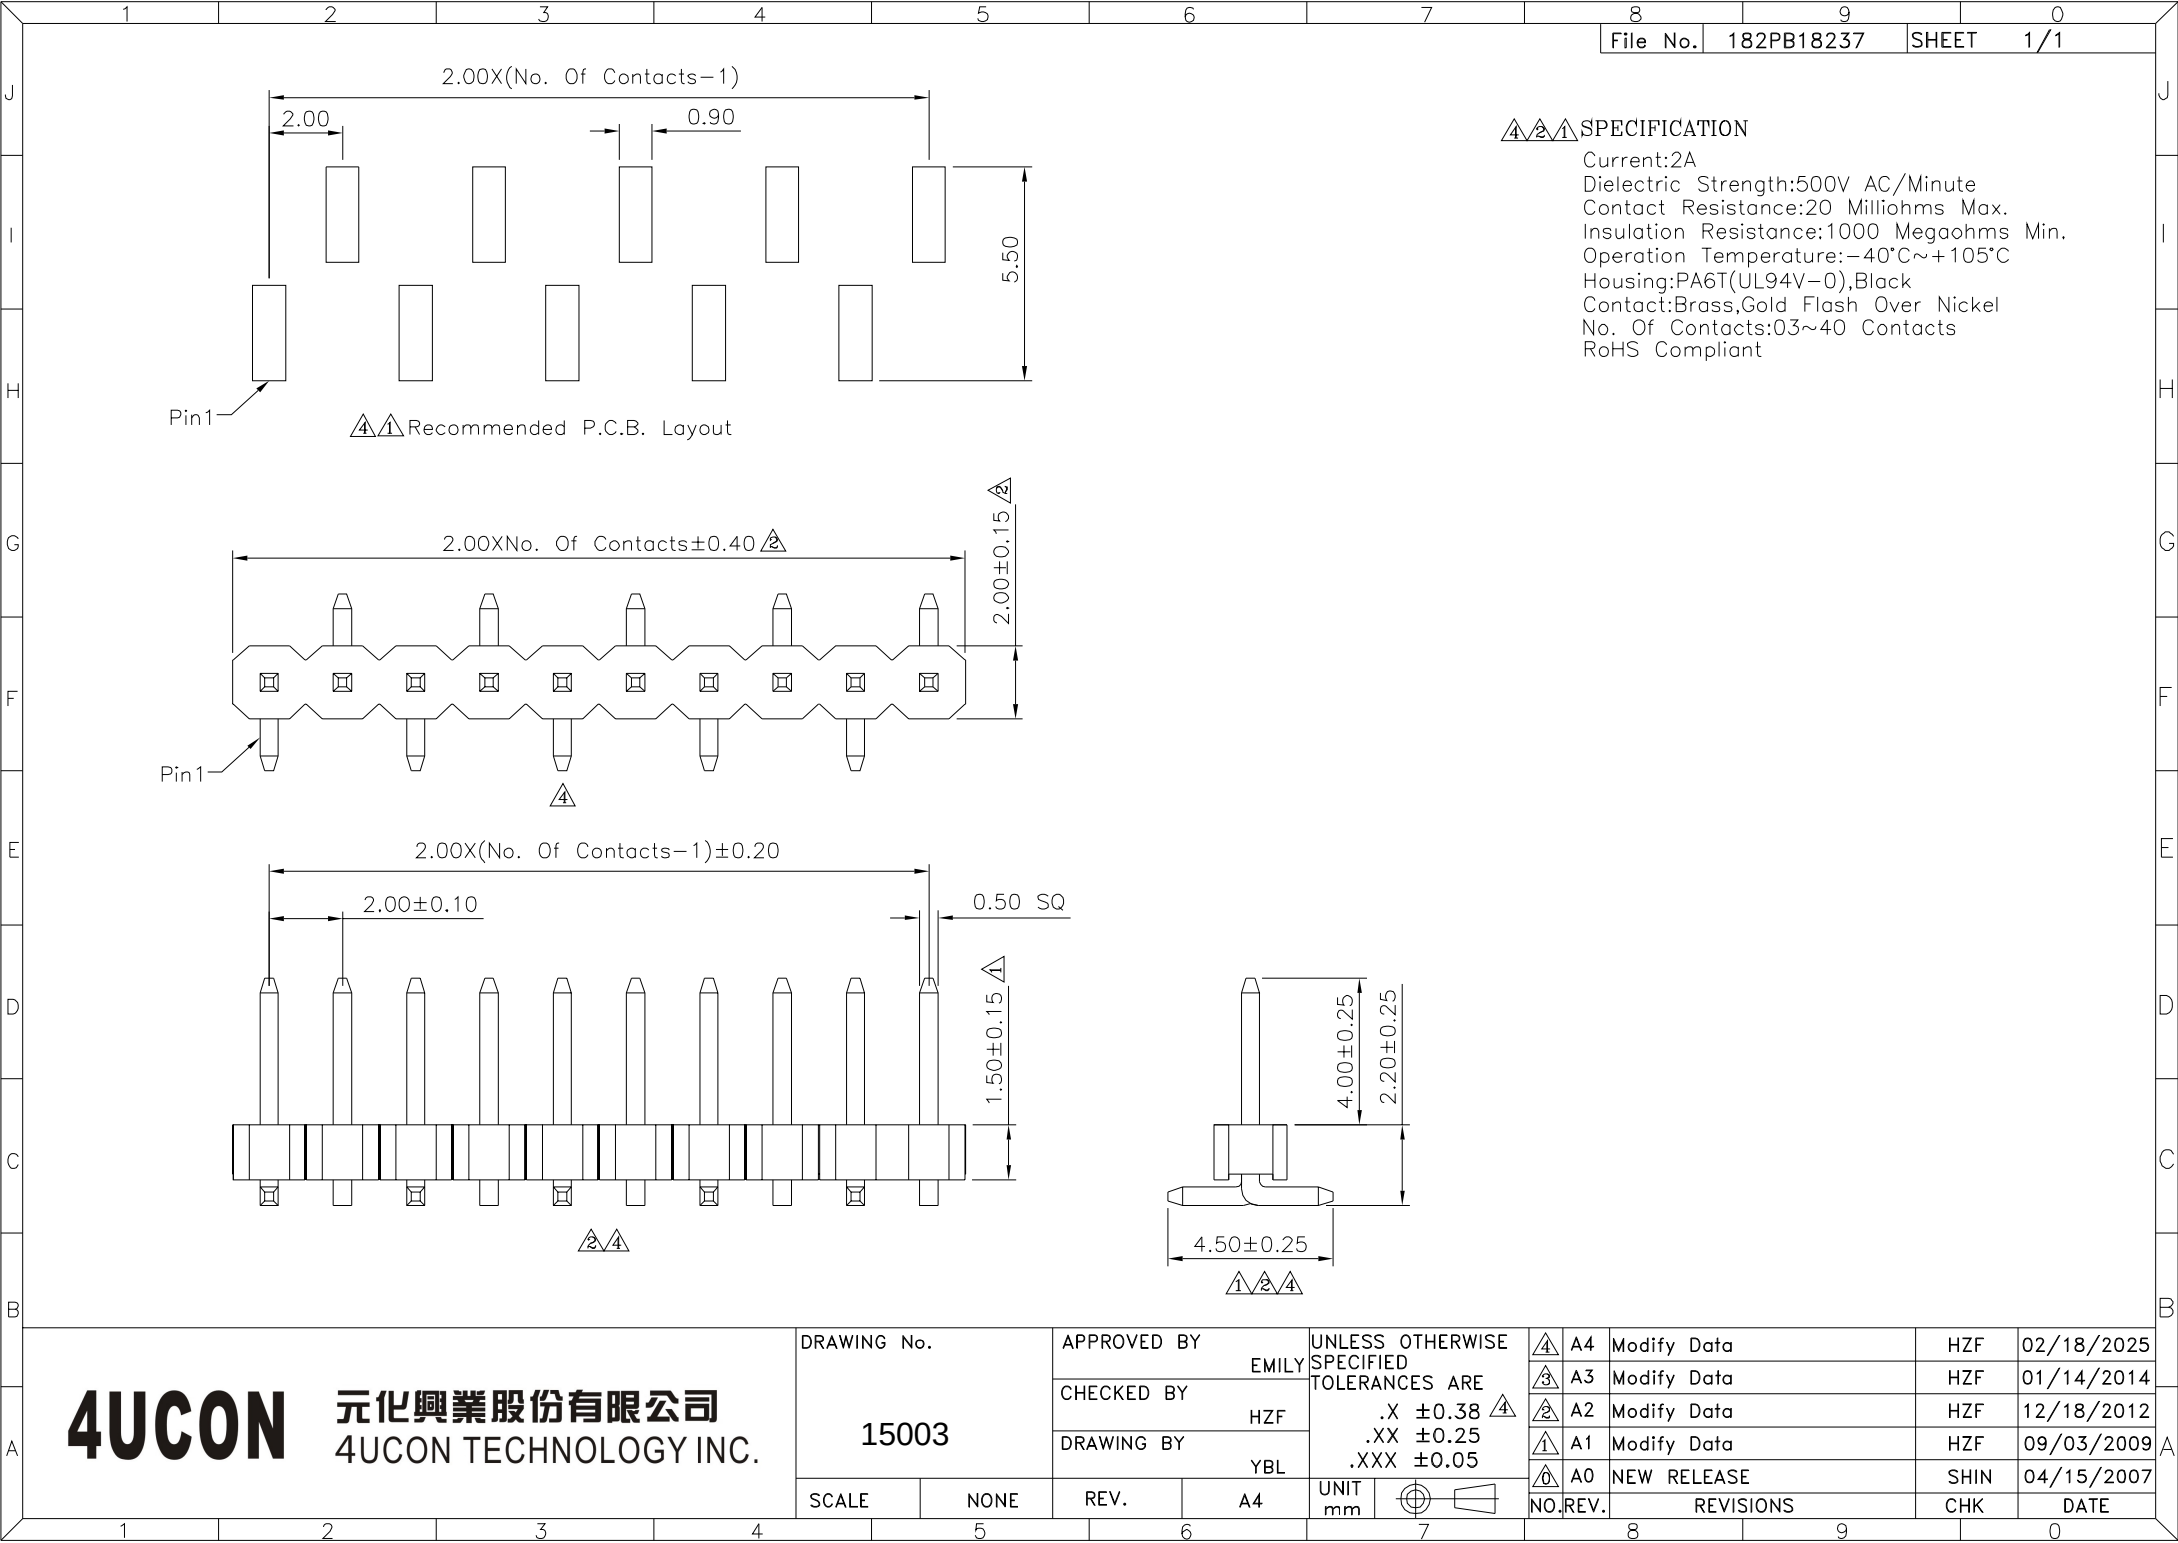

4-2-1 SPECIFICATION

Current:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

4-1 Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15003

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A4


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.38 4

.XX ± 0.25

.XXX ± 0.05

UNIT
mm



4	A4	Modify Data	HZF	02/18/2025
3	A3	Modify Data	HZF	01/14/2014
2	A2	Modify Data	HZF	12/18/2012
1	A1	Modify Data	HZF	09/03/2009
0	A0	NEW RELEASE	SHIN	04/15/2007
NO.	REV.	REVISIONS	CHK	DATE