


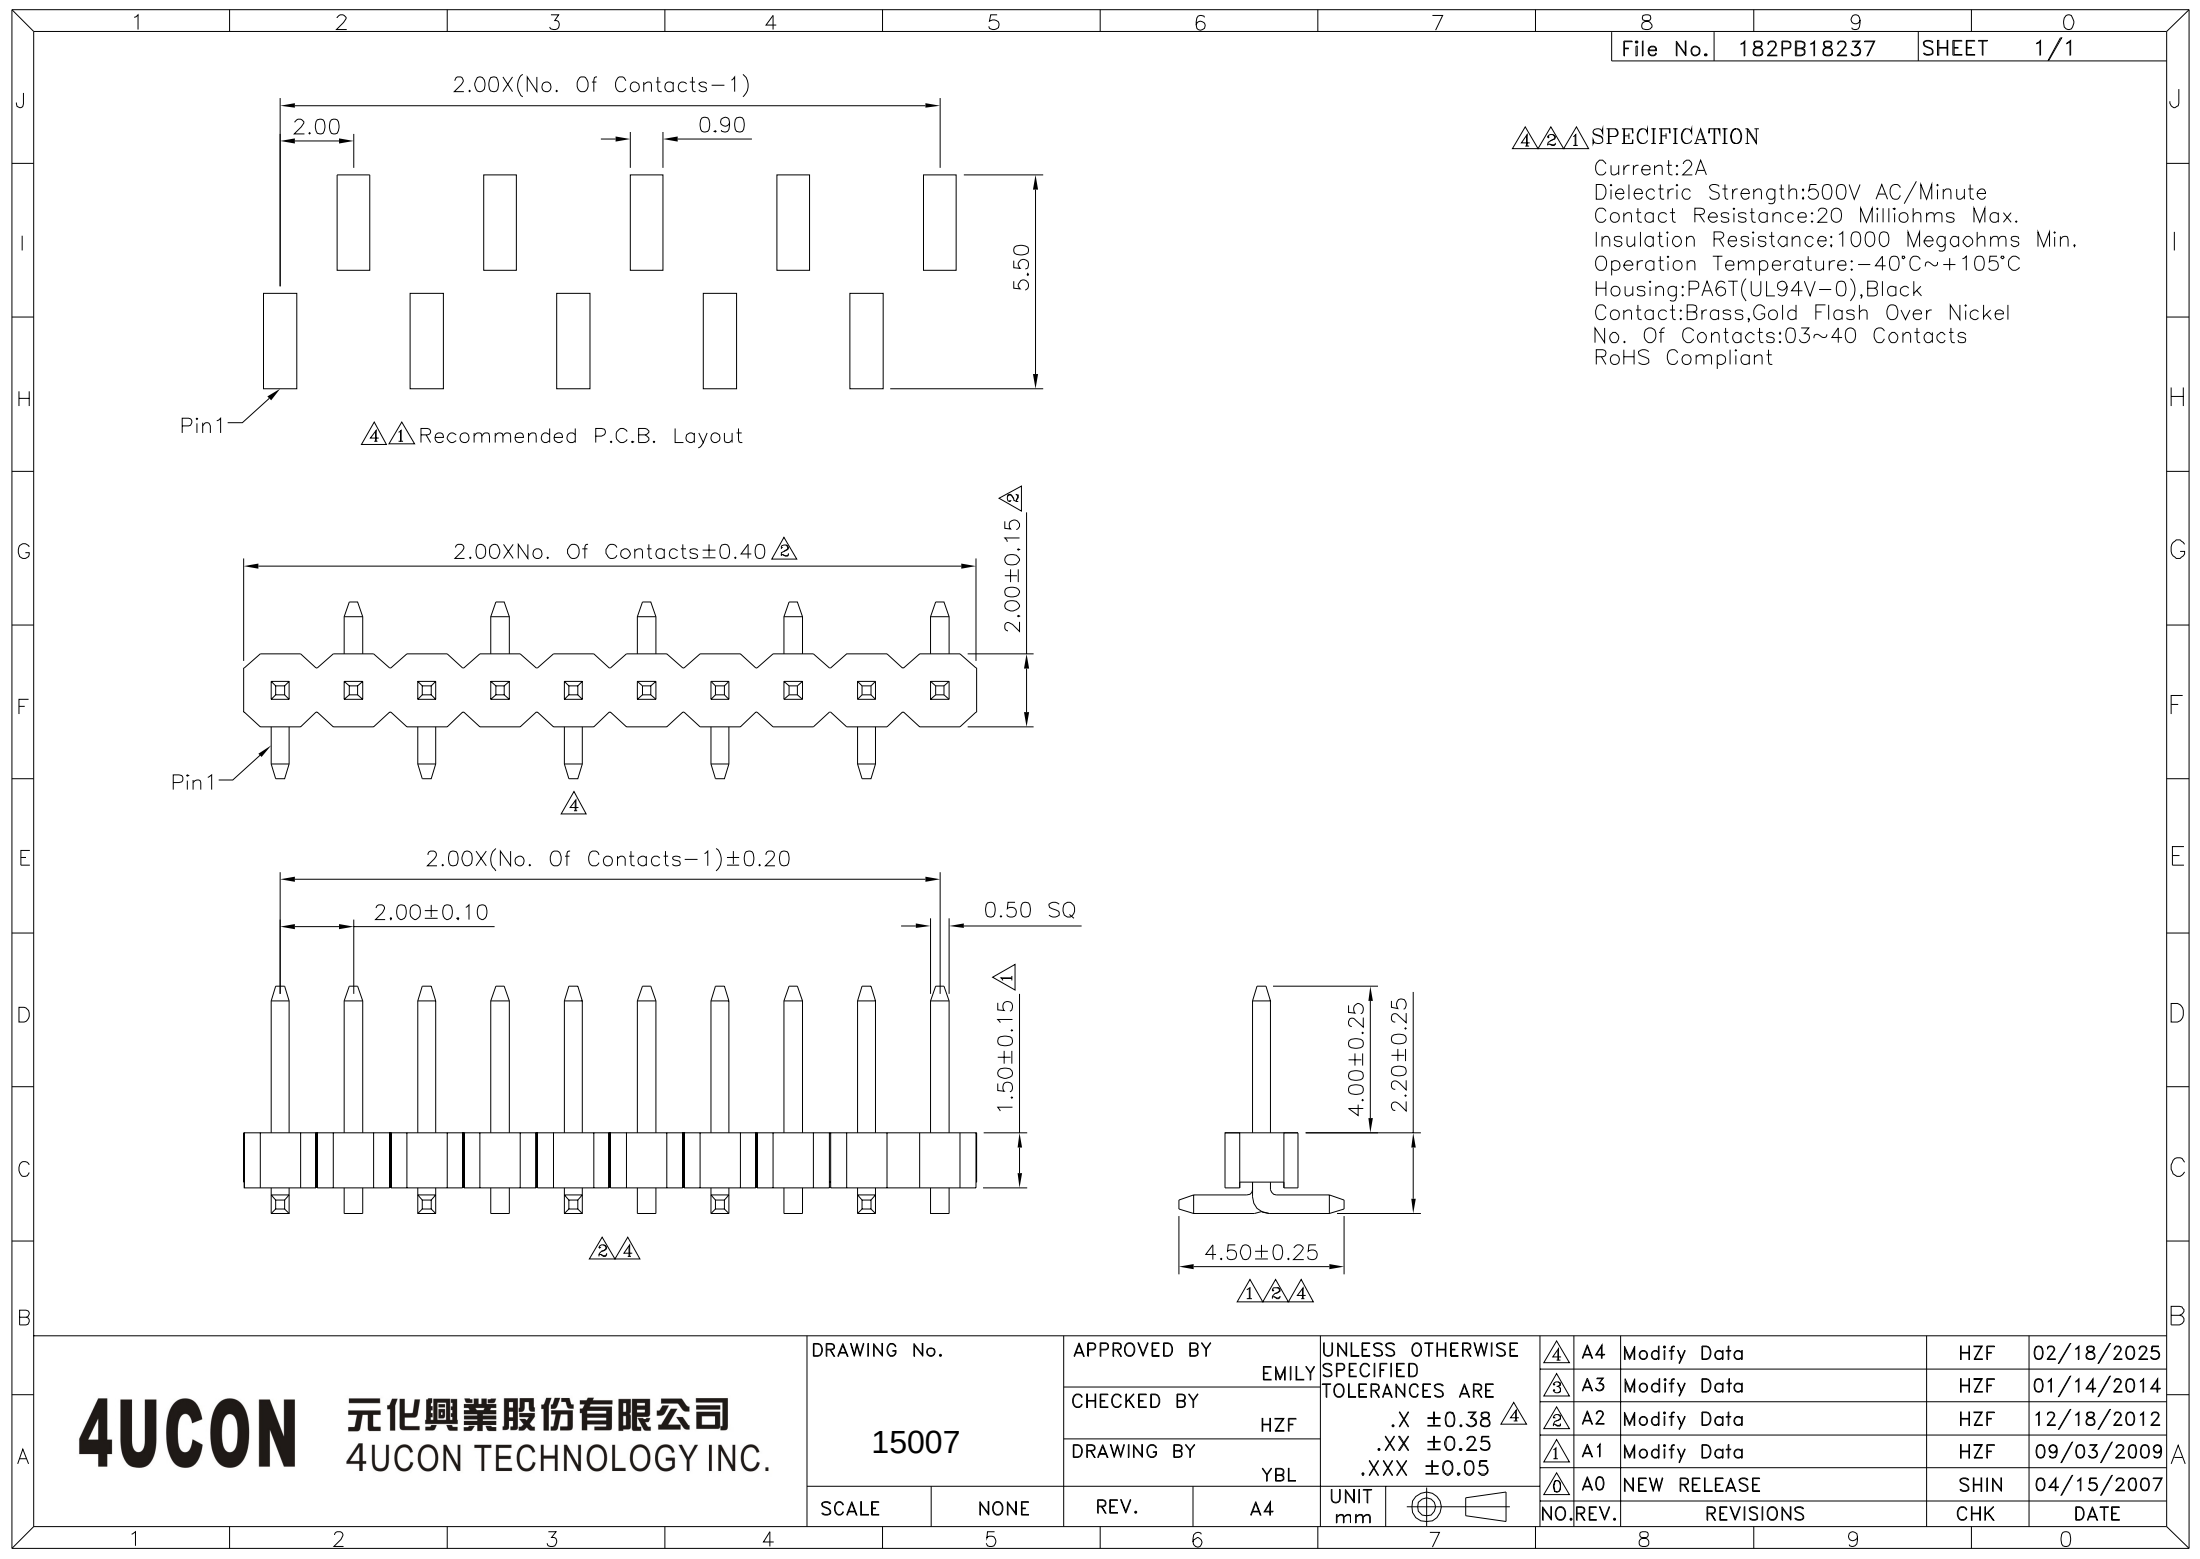

△△△ SPECIFICATION

Current:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 15007		APPROVED BY	
		EMILY	
		CHECKED BY	
		HZF	
		DRAWING BY	
		YBL	
SCALE	NONE	REV.	A4

△	A4	Modify Data	HZF	02/18/2025
△	A3	Modify Data	HZF	01/14/2014
△	A2	Modify Data	HZF	12/18/2012
△	A1	Modify Data	HZF	09/03/2009
△	A0	NEW RELEASE	SHIN	04/15/2007
NO.	REV.	REVISIONS	CHK	DATE