


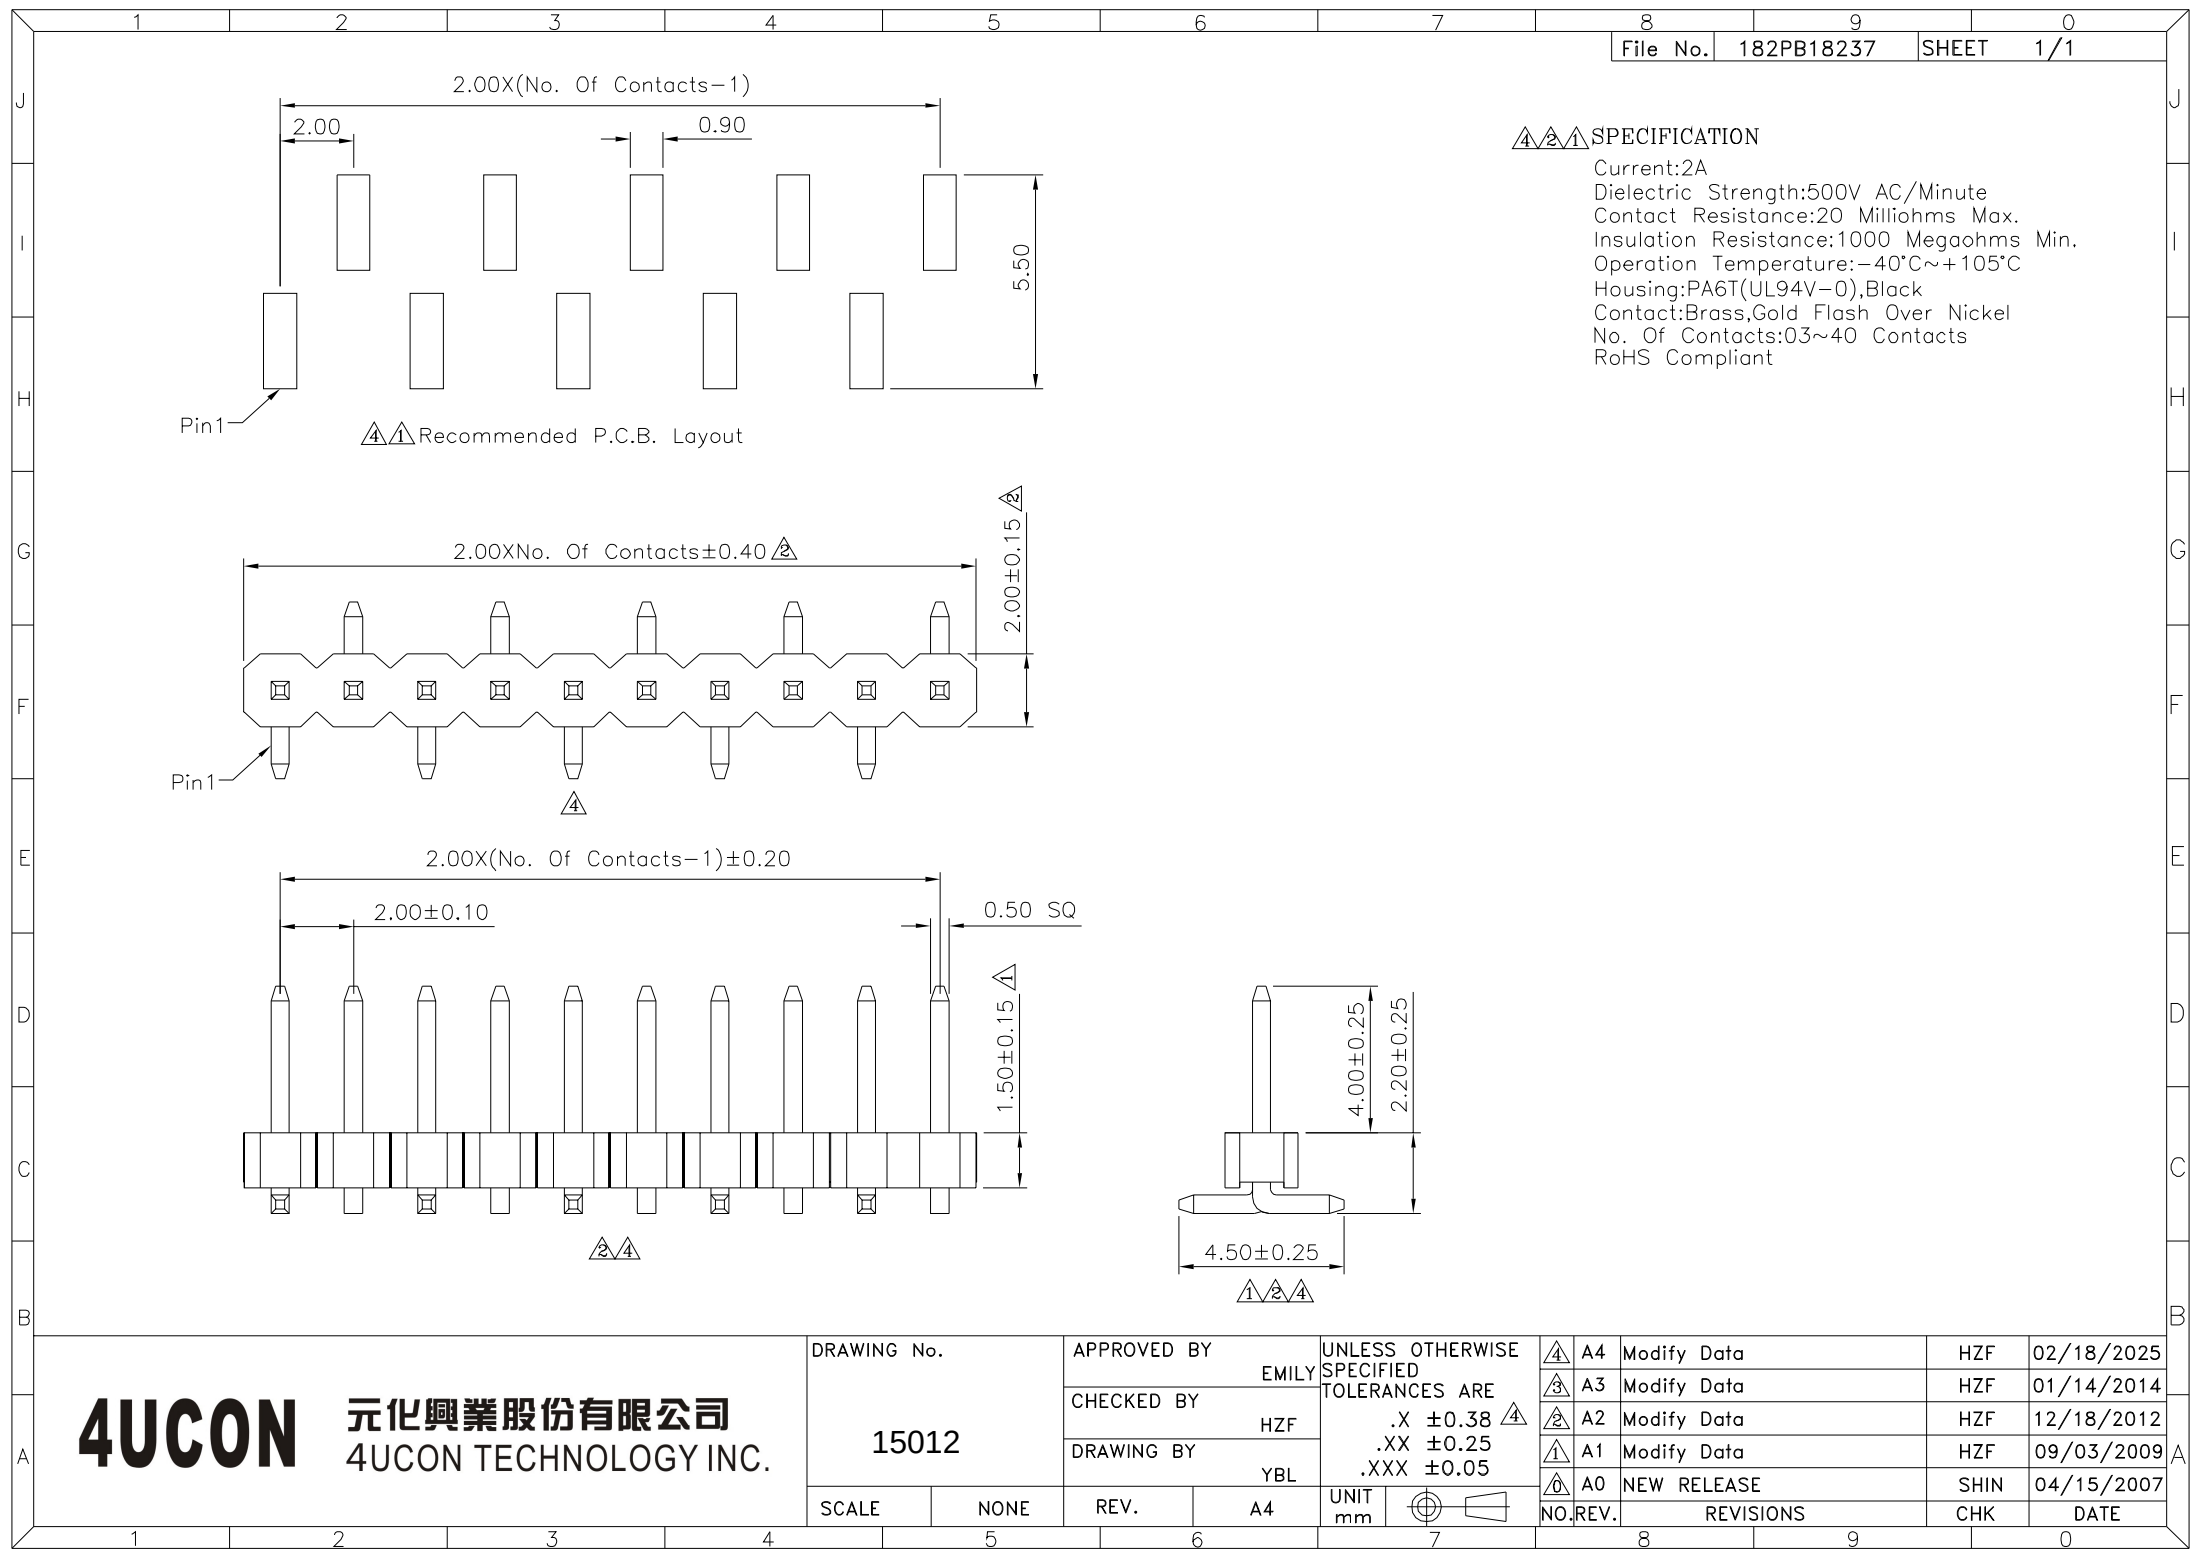

4.2.1 SPECIFICATION

Current:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

4Ucon

元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.

15012

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A4


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

.XXX ± 0.05

UNIT
mm



4. A4

Modify Data

HZF

02/18/2025

3. A3

Modify Data

HZF

01/14/2014

2. A2

Modify Data

HZF

12/18/2012

1. A1

Modify Data

HZF

09/03/2009

0. A0

NEW RELEASE

SHIN

04/15/2007

NO. REV.

REVISIONS

CHK

DATE