


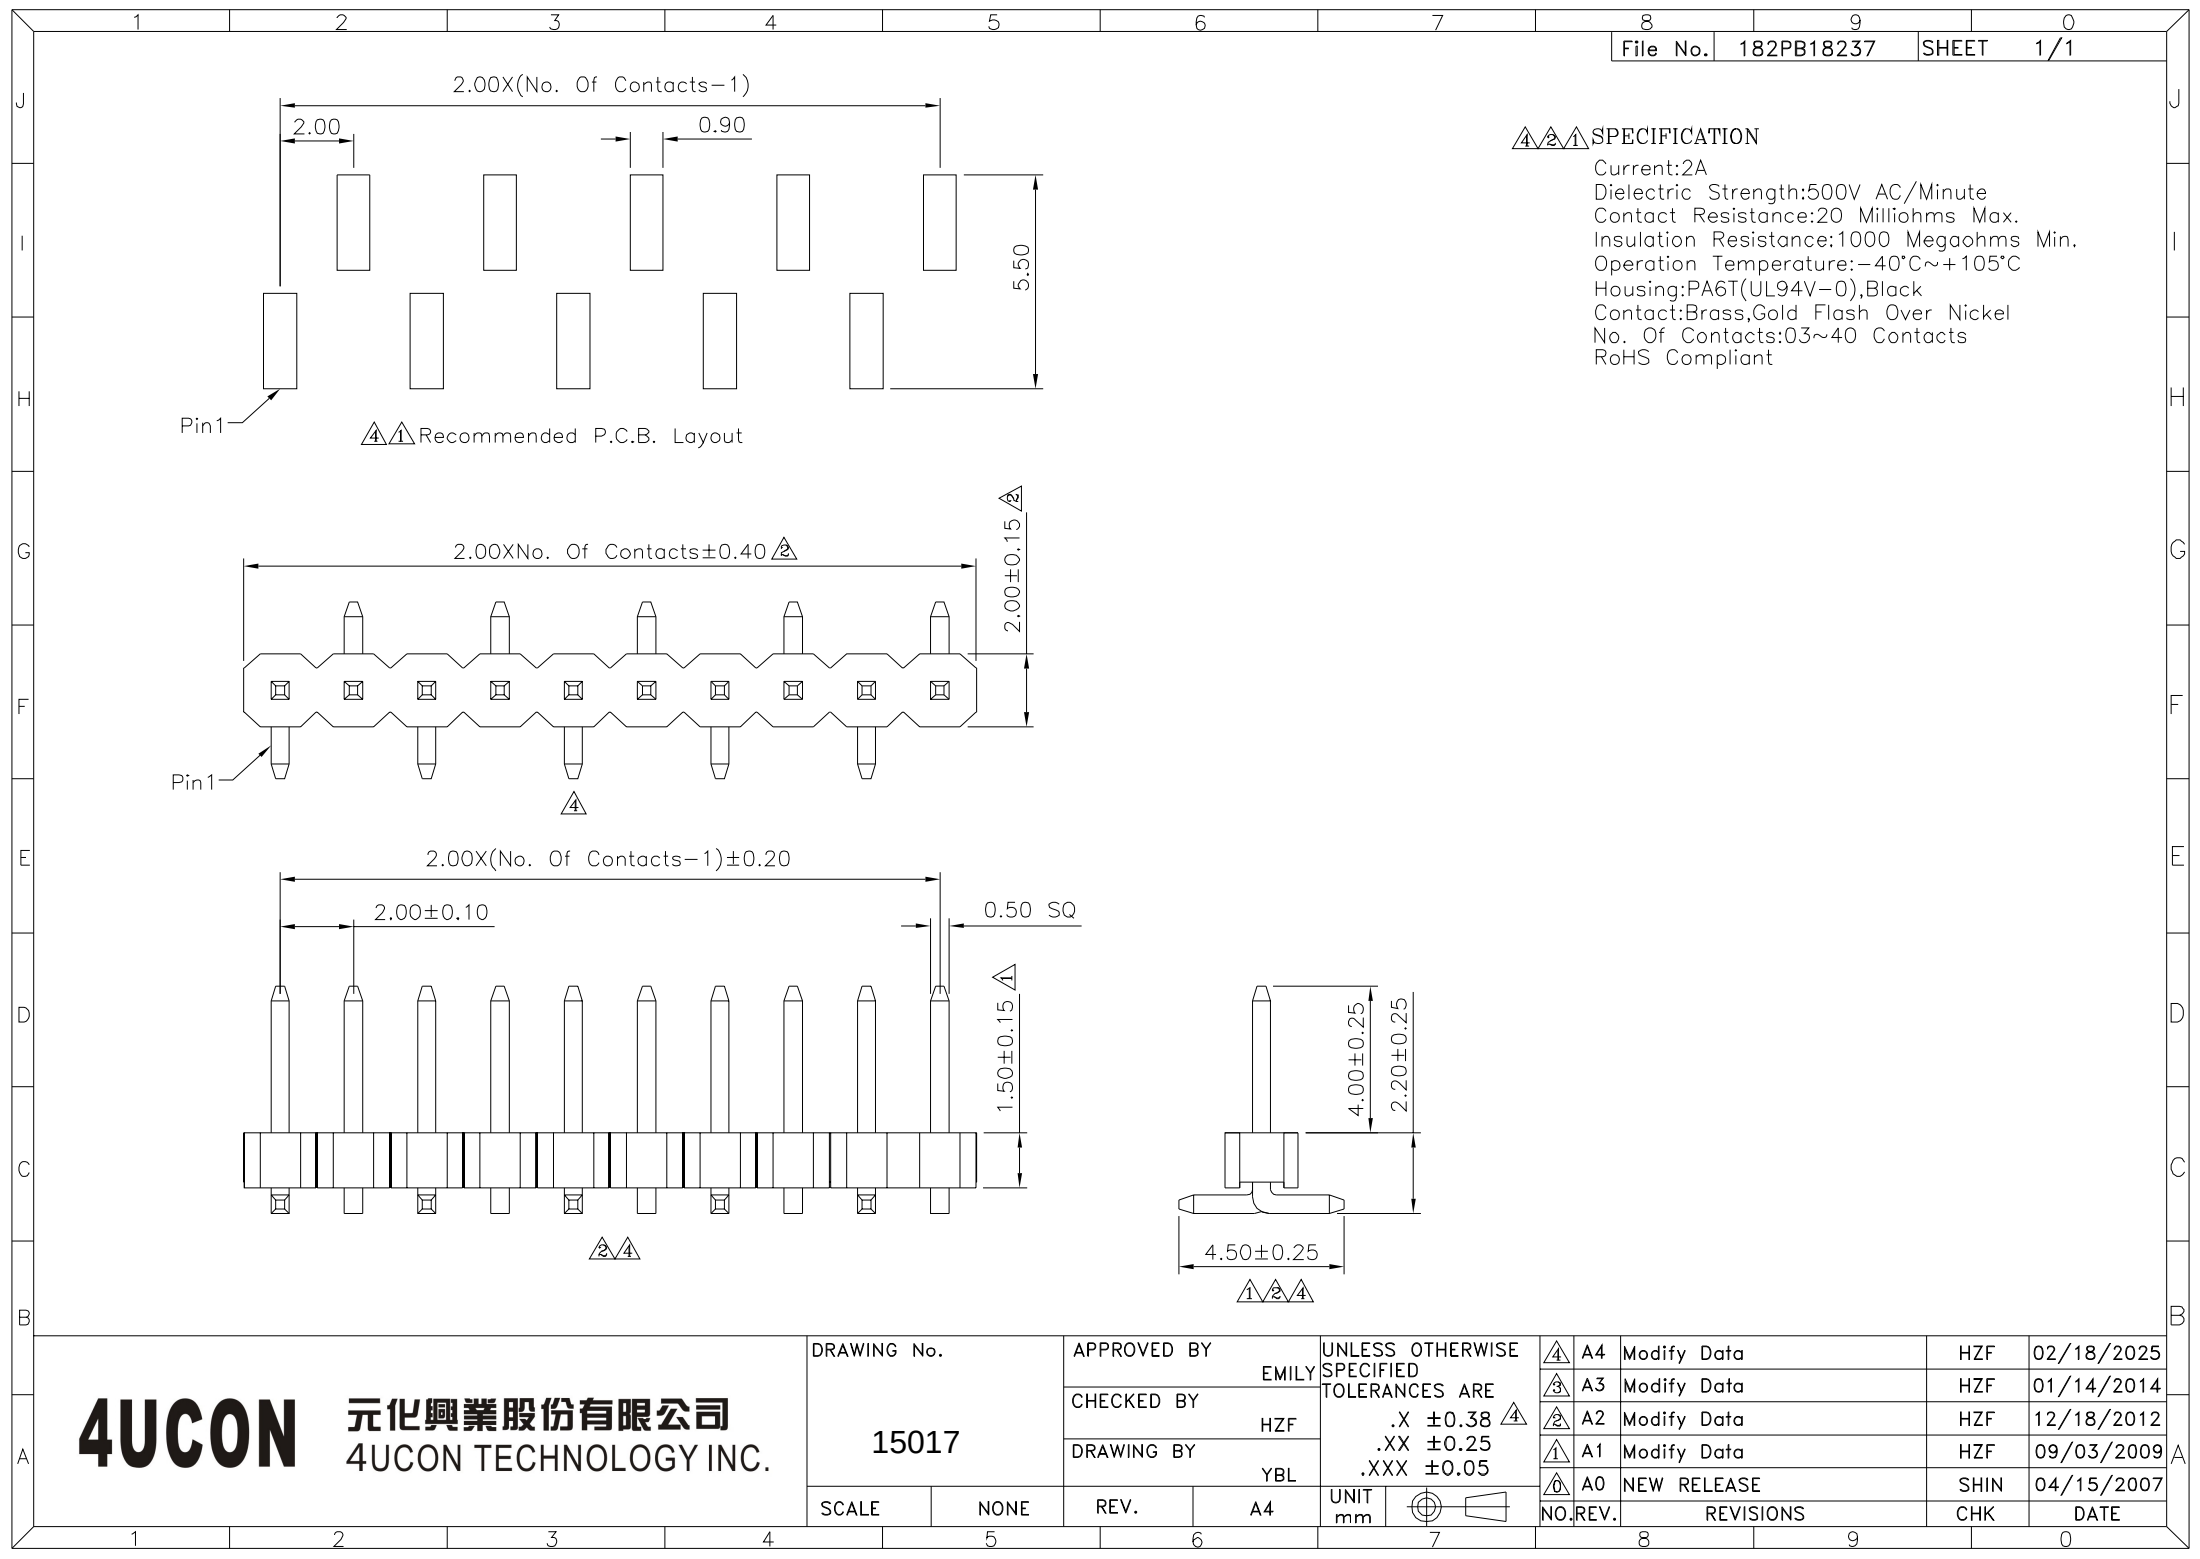

4-2-1 SPECIFICATION

Current:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 15017		APPROVED BY		EMILY
		CHECKED BY		HZF
		DRAWING BY		YBL
SCALE	NONE	REV.	A4	

.X ±0.38
.XX ±0.25
.XXX ±0.05

