
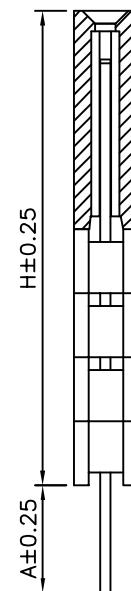
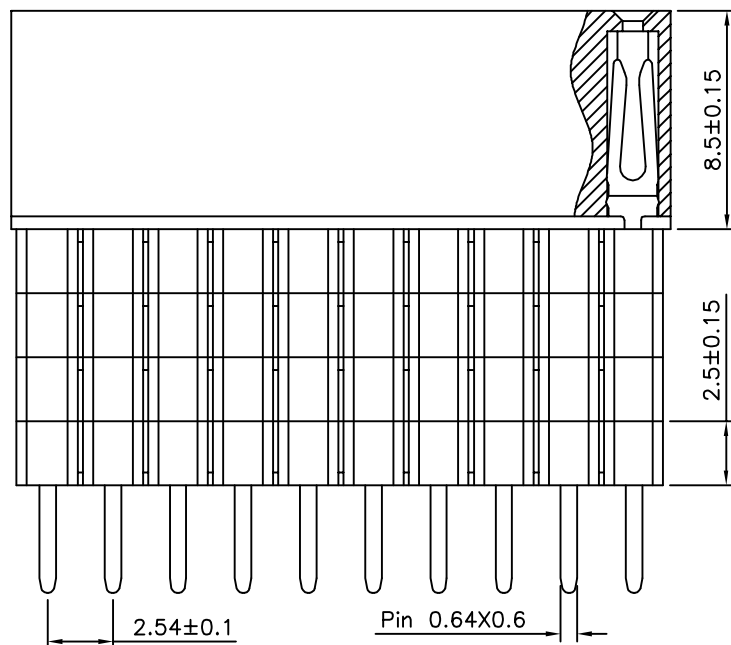


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

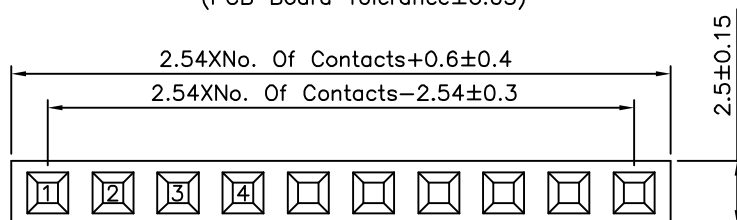

# SPECIFICATION

Current Rating:3A  
Withstand Voltage:1000V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

| Series No. | Plastic Q'ty | H     | A     |
|------------|--------------|-------|-------|
| 0196       | 1            | 11.00 | 2.30  |
| 0196       | 1            | 11.00 | 7.00  |
| 0196       | 1            | 11.00 | 12.30 |
| 0197       | 2            | 13.50 | 4.50  |
| 0197       | 2            | 13.50 | 9.80  |
| 0198       | 3            | 16.00 | 2.00  |
| 0198       | 3            | 16.00 | 7.30  |
| 0199       | 4            | 18.50 | 4.80  |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

15178

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A0

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

X. ±0.25 X.\* ±2°  
.X ±0.20 .X\* ±1.5°  
.XX ±0.15 .XX\* ±1°  
.XXX ±0.10 .XXX\* ±0.5°

UNIT  
mm



NO. REV.

NEW RELEASE  
REVISIONS

CHK

DATE  
12/11/2014