
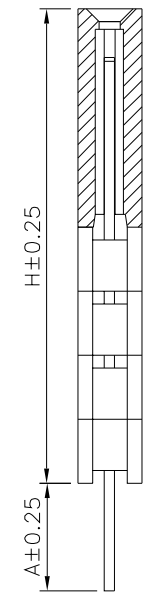
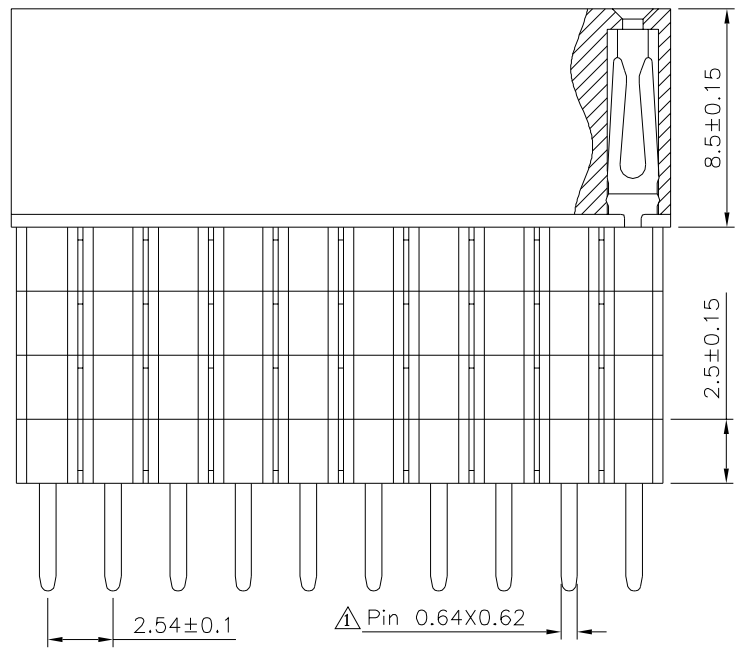


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

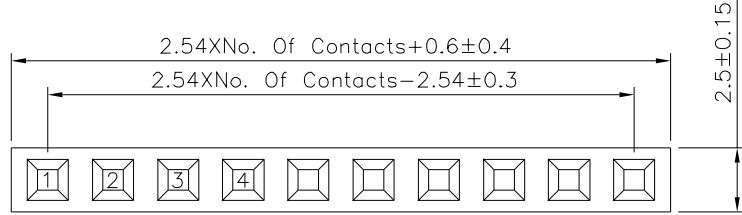

SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operating Temperature:-40°C~+105°C
 ⚠ Insulator:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 15295

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ⚠
 X. ±0.30 X. ±2°
 .X ±0.25 .X ±1.5°
 .XX ±0.20 .XX ±1°
 .XXX ±0.15 .XXX ±0.5°

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A1	Modify Data	HZF	03/28/2025
⚠	A0	NEW RELEASE	HZF	12/11/2014