
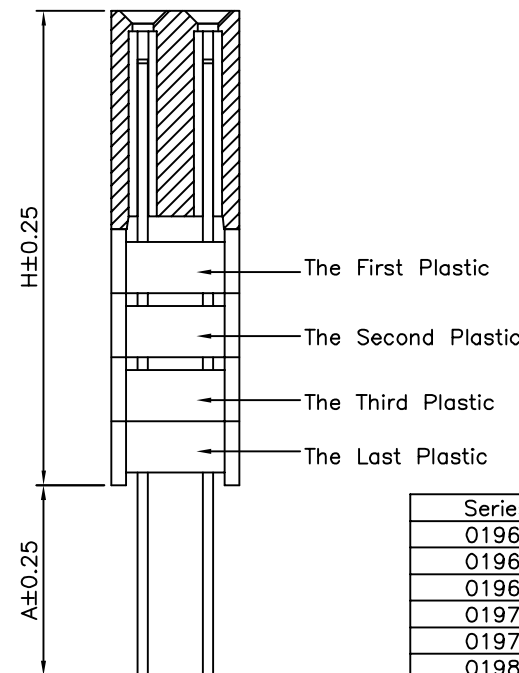


# SPECIFICATION

Current Rating:3A  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

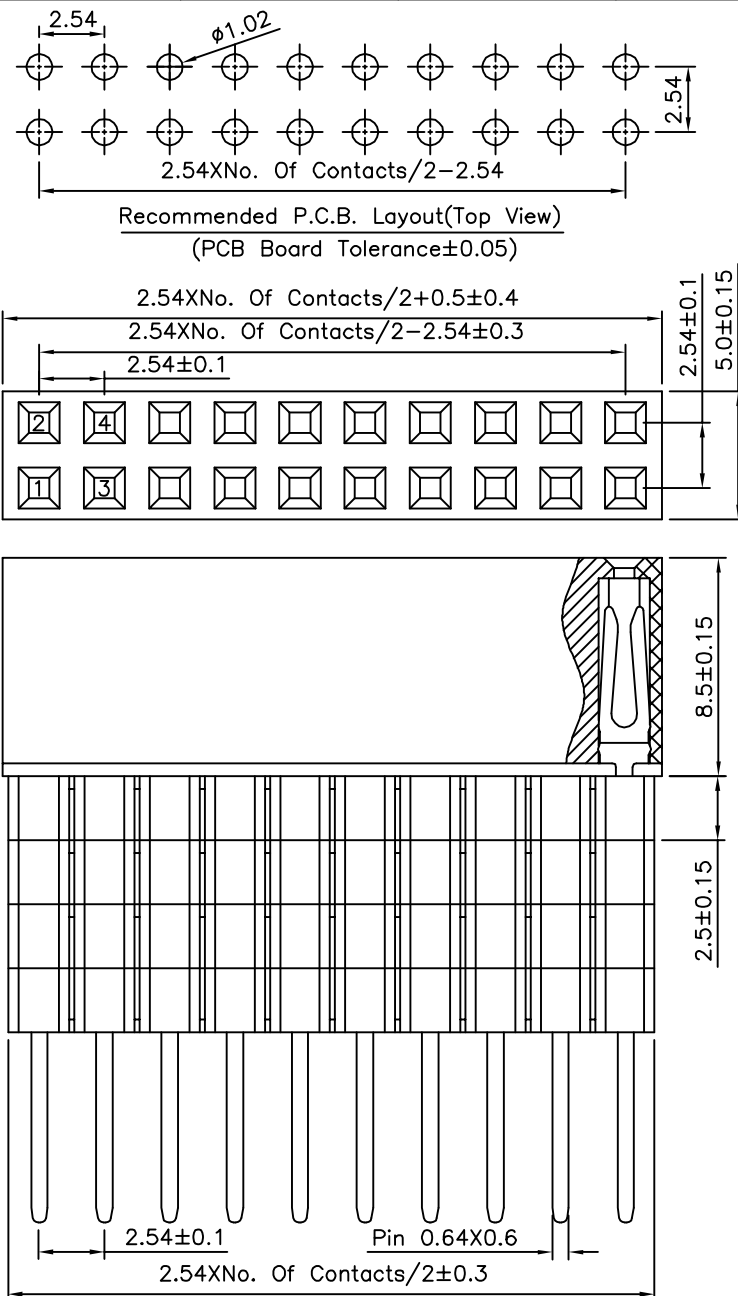

| Series No. | Plastic Q'ty | H     | A     |
|------------|--------------|-------|-------|
| 0196       | 1            | 11.00 | 2.30  |
| 0196       | 1            | 11.00 | 7.00  |
| 0196       | 1            | 11.00 | 12.30 |
| 0197       | 2            | 13.50 | 4.50  |
| 0197       | 2            | 13.50 | 9.80  |
| 0198       | 3            | 16.00 | 2.00  |
| 0198       | 3            | 16.00 | 7.30  |
| 0199       | 4            | 18.50 | 4.80  |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

15404

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A0

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

X. ±0.25 X. ±0.25  
 .X ±0.20 .X ±0.25  
 .XX ±0.15 .XX ±0.15  
 .XXX ±0.10 .XXX ±0.15

UNIT  
 mm



NO. REV.

NEW RELEASE  
 REVISIONS

CHK  
 DATE

05/03/2014