


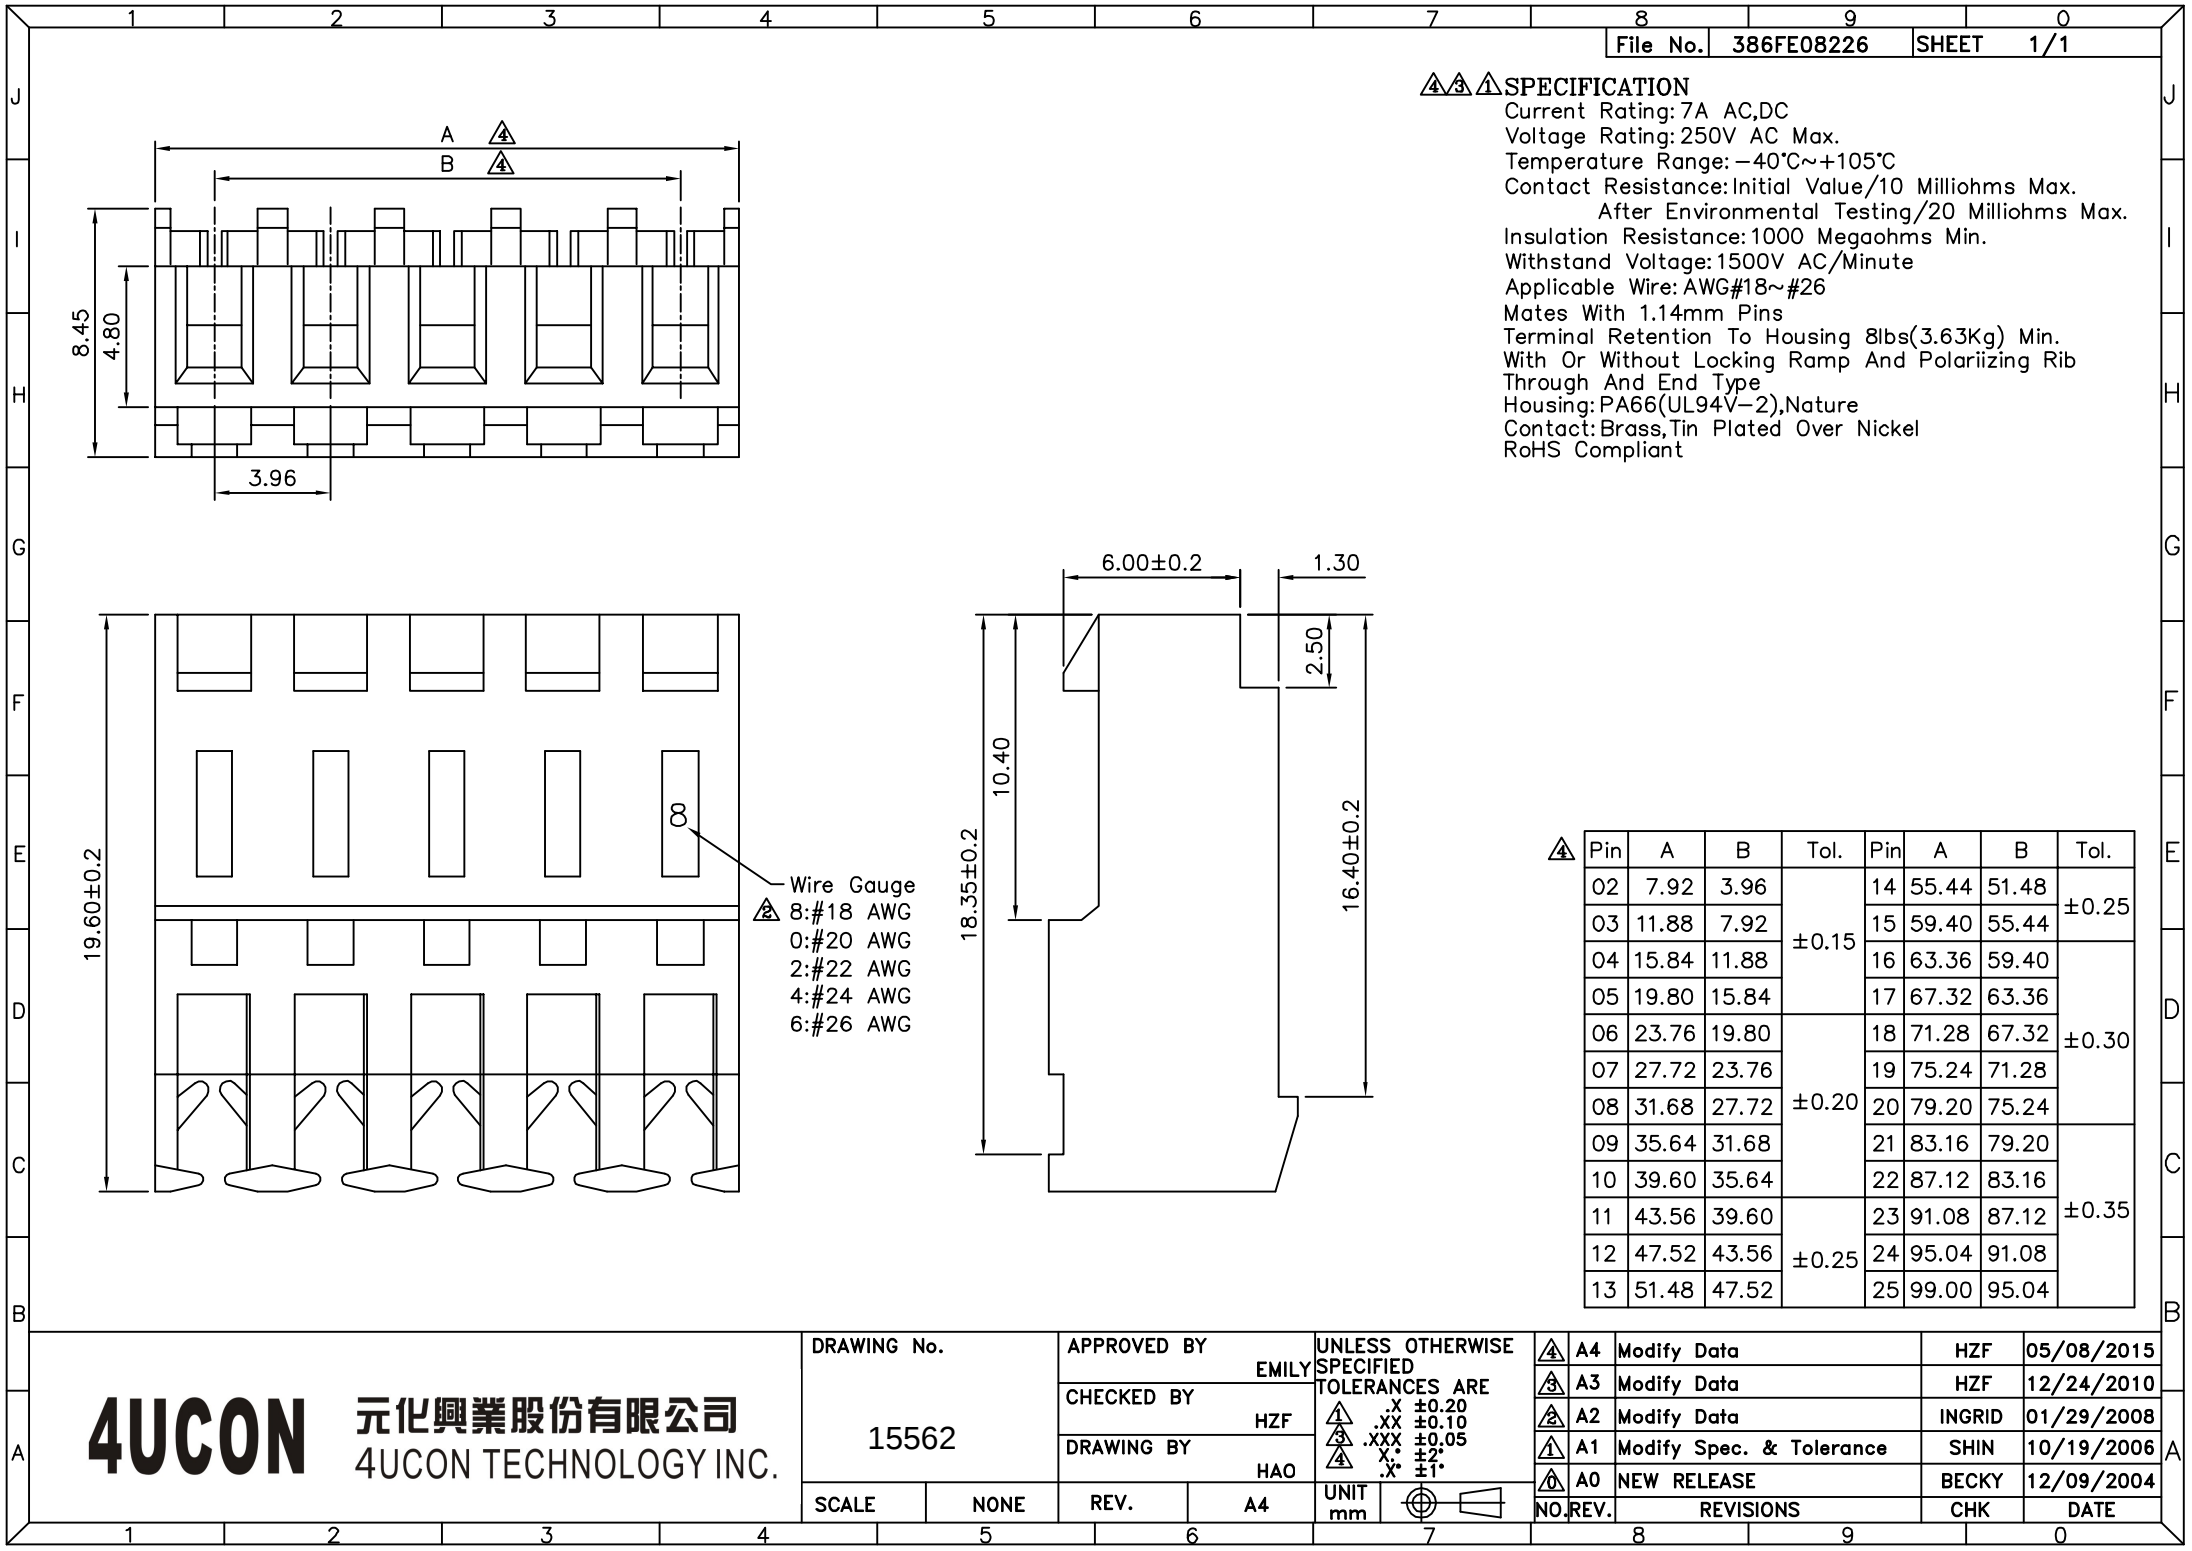

△△△ SPECIFICATION
Current Rating: 7A AC,DC
Voltage Rating: 250V AC Max.
Temperature Range: -40°C~+105°C
Contact Resistance: Initial Value/10 Milliohms Max.
After Environmental Testing/20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstand Voltage: 1500V AC/Minute
Applicable Wire: AWG#18~#26
Mates With 1.14mm Pins
Terminal Retention To Housing 8lbs(3.63Kg) Min.
With Or Without Locking Ramp And Polariizing Rib
Through And End Type
Housing: PA66(UL94V-2),Nature
Contact: Brass, Tin Plated Over Nickel
RoHS Compliant