

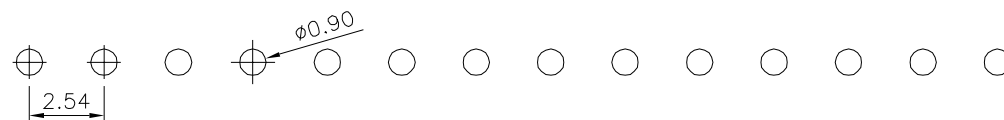

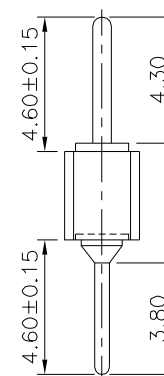


# SPECIFICATION

Current Rating: 3 Amps/Contact Max.  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megaohms Min. At 100V  
 Operating Voltage: 60V AC/DC  
 Operating Temperature: -55°C~+105°C  
 Pin: Brass, Gold Flash Over All, Over Nickel  
 Insulator: PPS(UL94V-0), Black  
 RoHS Compliant

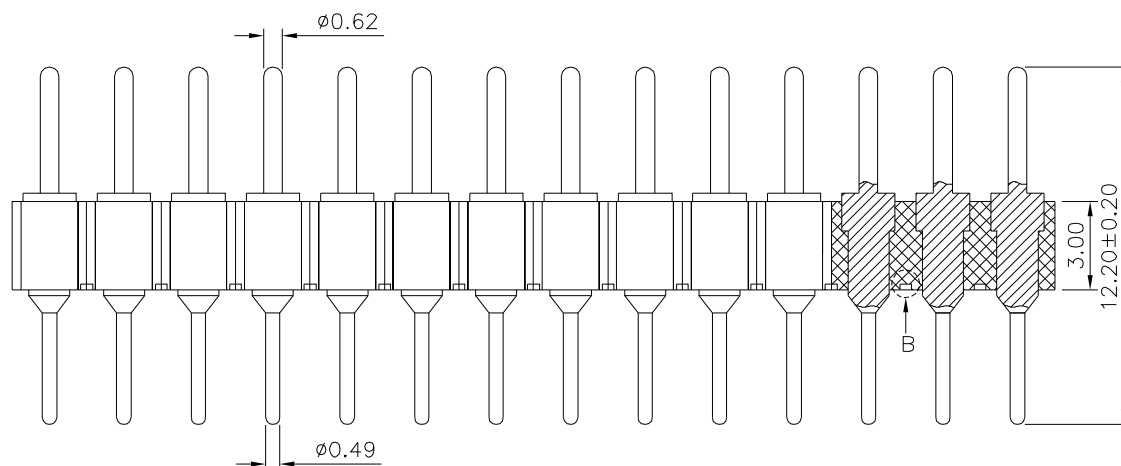

Recommended P.C.B. Layout

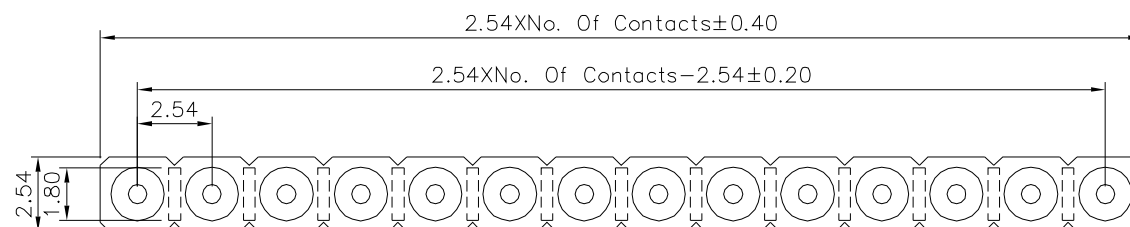

Detail: B

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

15666

APPROVED BY  
MEI

CHECKED BY  
HZF

DRAWING BY  
HAO

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±5°

UNIT  
mm



NO. REV.

BO NEW RELEASE

HZF

01/06/2016

NO. REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

BO