




△ SPECIFICATION

Current Rating:12 Amp/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC/Minute
Test Time=60 Sec./1PCS
Contact Resistance:20 Milliohms Max.
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
△ Soldering Reliability:
Test Temperature=250°C±10°C/5 Seconds Max.
Contact(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
△ Wire Guard:Phosphor Bronze,Tin Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

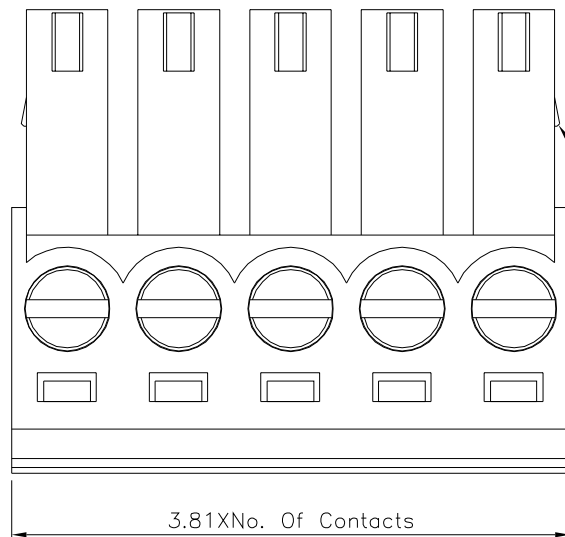

2P~6P With Wedge,Above 7P
Without Wedge(Including 7P)

△ Above 10P Tolerance Is ± 0.8
 ± 0.3

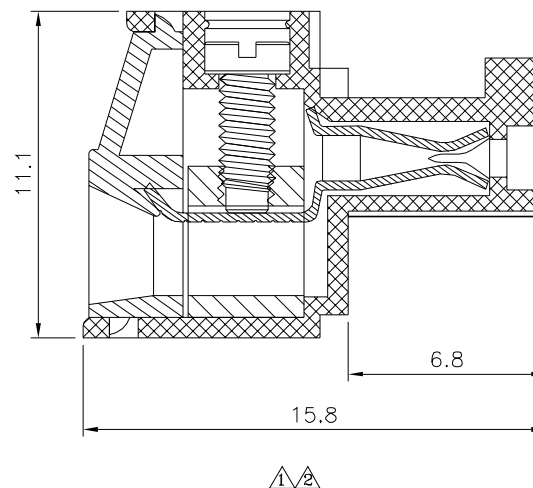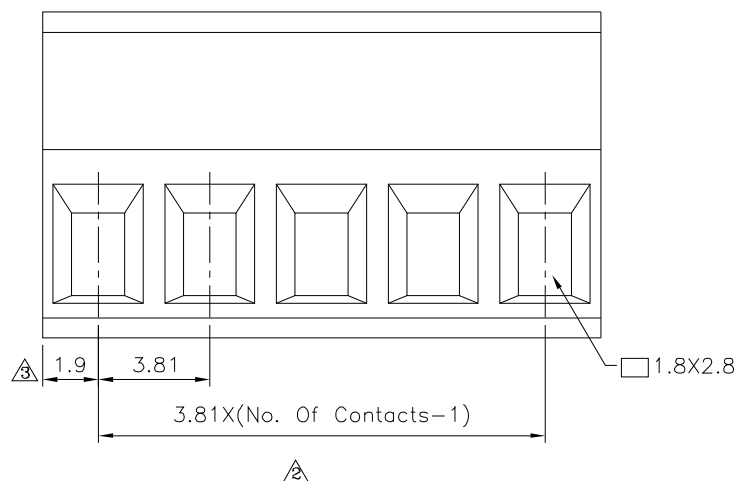

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△△

15722

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

SCALE

NONE

REV.

A3

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	01/30/2016
△	A2	Modify Data	HZF	10/25/2014
△	A1	Modify Data	HZF	08/14/2012
△	A0	NEW RELEASE	HZF	04/10/2009