

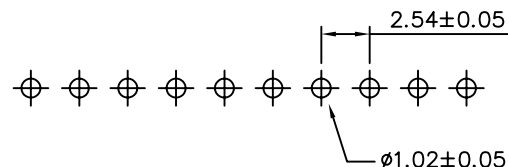


SPECIFICATIONS

Current Rating: 3 Amp
 Insulator Resistance: 5000 Megohms Min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C To +105°C
 Contact: Brass
 Insulator: Polyester, UL 94V-0
 Standard: PBT
 Finish: Gold Flash



Recommended P.C.Board Hole Layout

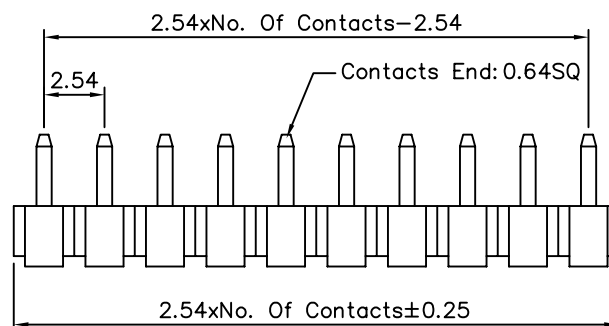

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15759

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

REV.

A0

UNLESS OTHERWISE SPECIFIED


TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

BECKY

05/17/2005