
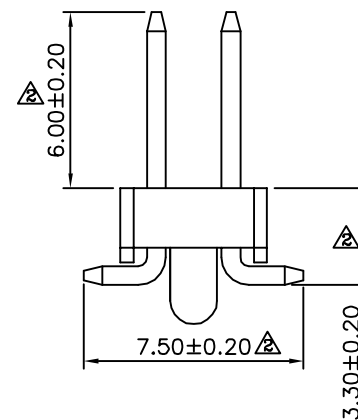
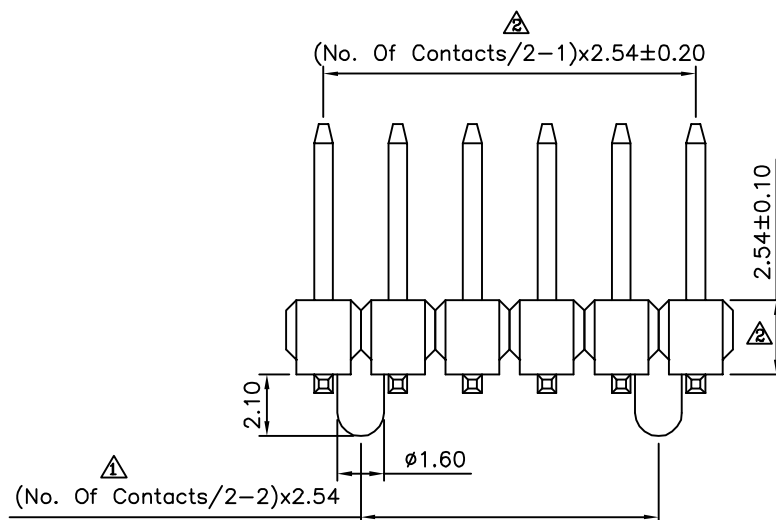
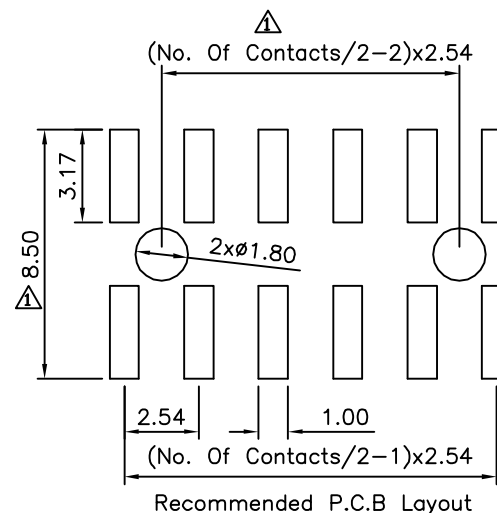


△ SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash
△ No. Of Contacts:06~80 Contacts
RoHS Compliant

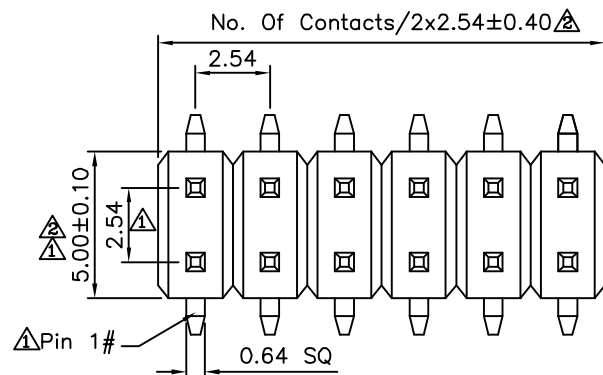

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15881

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


WZL

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.38
.XX ± 0.25
ANG. $\pm 5^\circ$

UNIT
mm



	A2	Modify Data	HZF	02/10/2011
	A1	Modify Data	HZF	03/27/2010
	A0	NEW RELEASE	HZF	04/17/2007
NO REV.	REVISIONS		CHK	DATE