
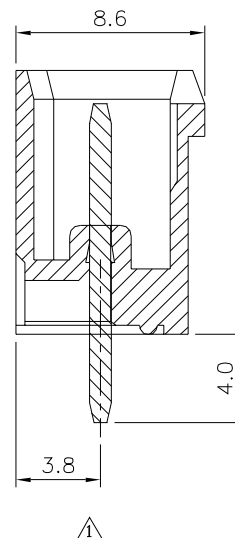
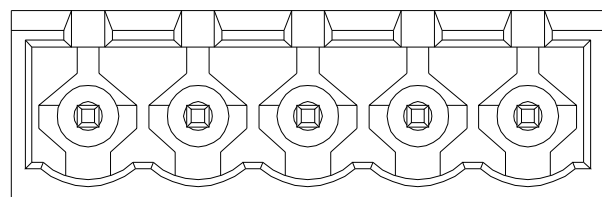


Recommended P.C.B. Layout

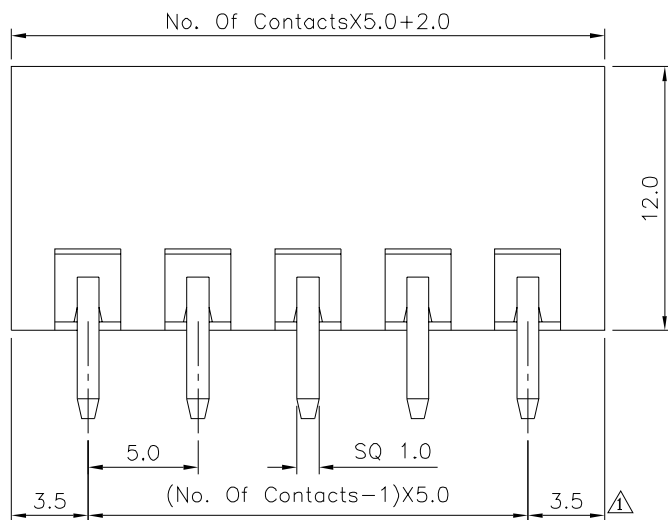

SPECIFICATION

Voltage Rating:300V AC

Current Rating:16A

Withstanding Voltage:2500V AC(1 Minute)

Operation Temperature:-40°C~+105°C

Soldering Reliability:+250°C,5 Seconds Max.

Solder Pin:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide(UL94V-0),Green

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1/2

15940

SCALE

NONE

REV.

A2

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

X° ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	03/11/2015
1	A1	Modify Data	HZF	01/31/2012
0	A0	NEW RELEASE	HZF	06/27/2010