

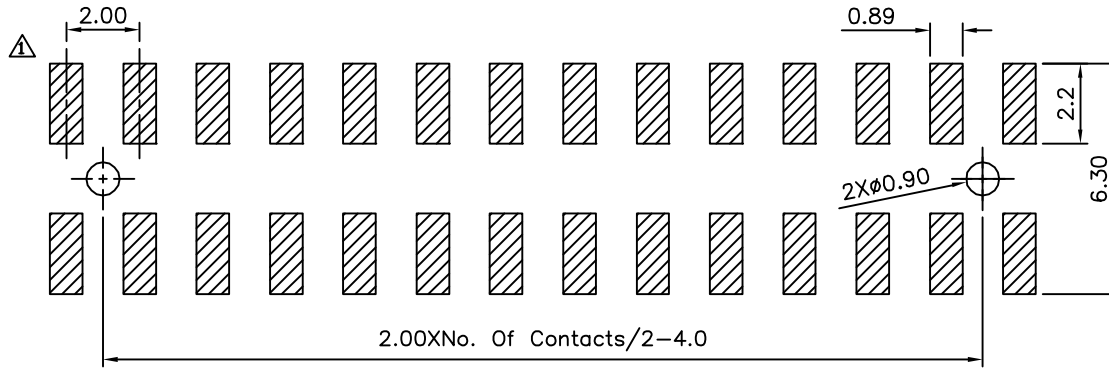
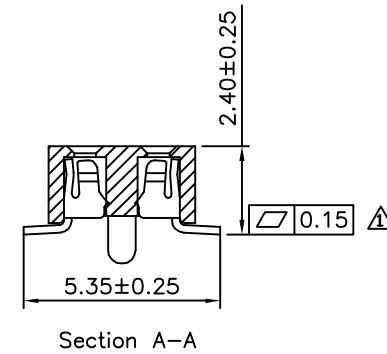


△ SPECIFICATION
 Current Rating: 2.0 Amp
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Phosphor Bronze
 Gold Flash Over All, Over Nickel
 △ Insulator: PA9T+30%G.F.(UL94V-0), Black
 RoHS Compliant

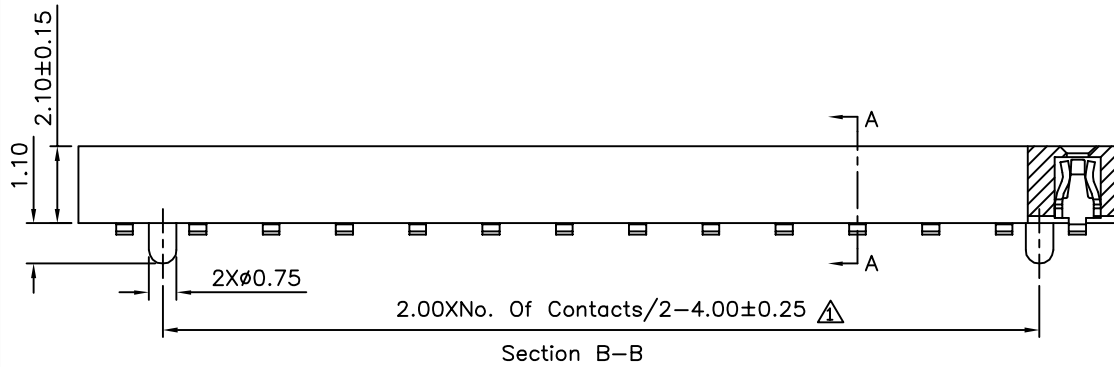

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance ±0.05)

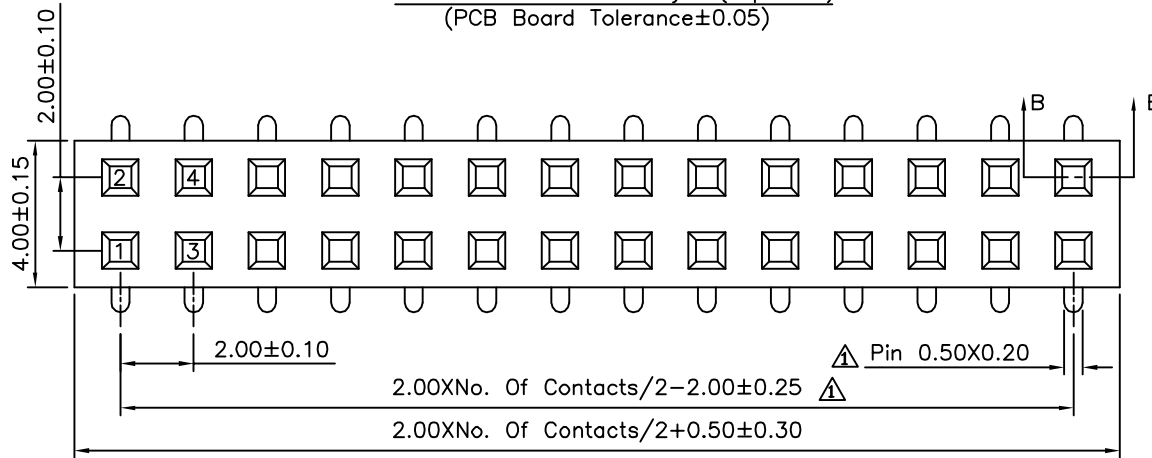

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15956

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △ .X ±0.40
 △ .XX ±0.25
 △ .XXX ±0.15
 ANG. ±3°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	05/06/2013
△ A2		Modify Data	HZF	02/09/2010
△ A1		Modify Data	HZF	02/20/2009
△ A0		NEW RELEASE	BECKY	12/01/2004