


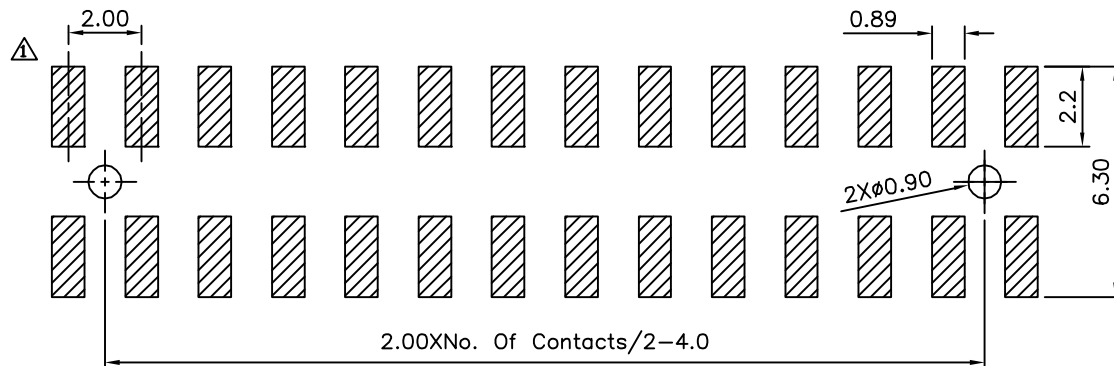


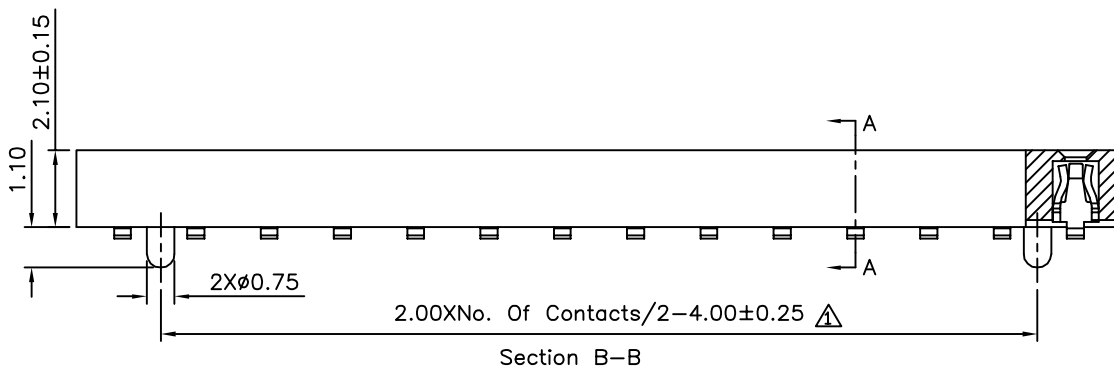

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

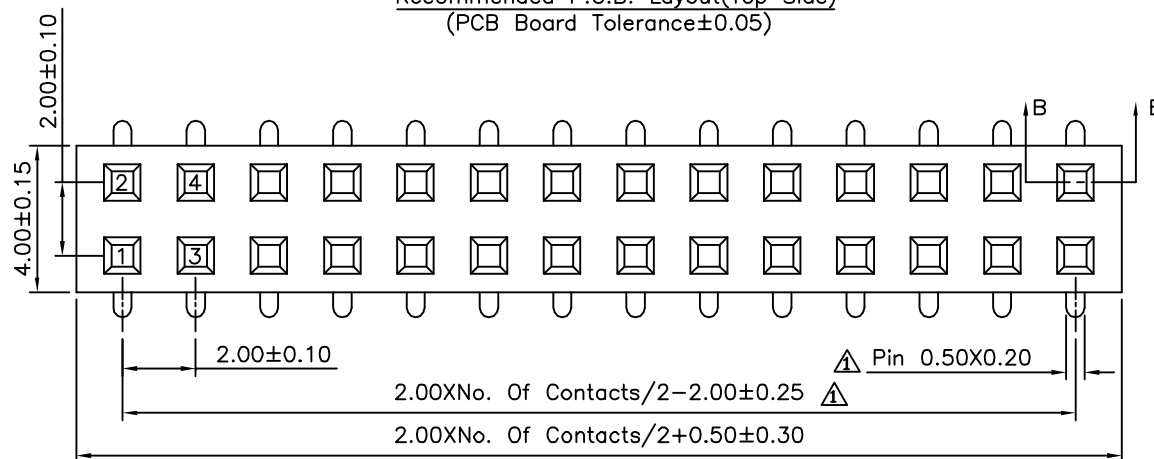

△ SPECIFICATION
 Current Rating:2.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze
 Gold Flash Over All,Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

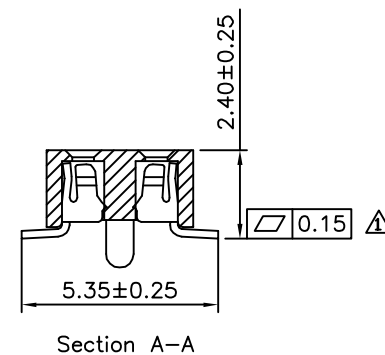

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15965

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ± 0.40
 △ .XX ± 0.25
 △ .XXX ± 0.15
 ANG. $\pm 3^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	05/06/2013
△ A2		Modify Data	HZF	02/09/2010
△ A1		Modify Data	HZF	02/20/2009
△ A0		NEW RELEASE	BECKY	12/01/2004