



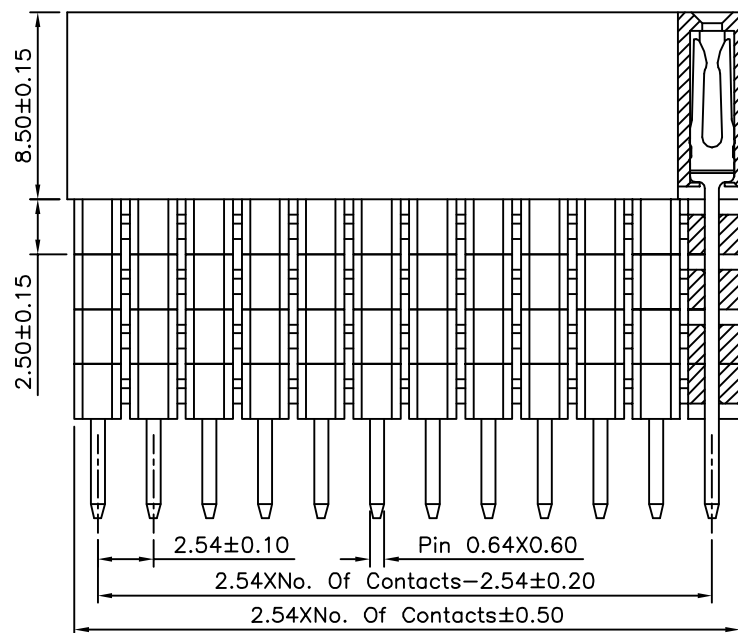

Section A-A

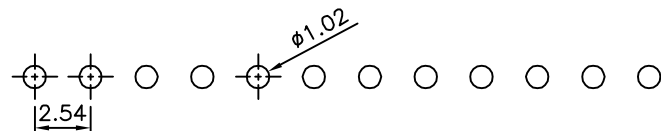

The First Plastic

The Second Plastic

The Third Plastic

The Last Plastic



SPECIFICATION

Current Rating: 3.0 Amp
 Withstand Voltage: 1000V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Brass, Gold Plated Over Nickel
 Insulator: PBT+30%G.F.(UL94V-0), Black
 RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.67	4.60

DRAWING No.

16145

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

B1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ± 0.40
 .XX ± 0.25
 .XXX ± 0.15
 ANG. $\pm 3^{\circ}$

UNIT
 mm



B1

Modify Data

HZF

10/22/2012



B0

NEW RELEASE

HZF

05/23/2012

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.