
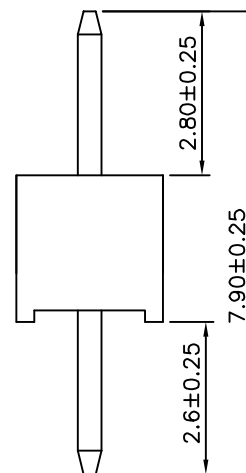


Recommended P.C.B. Layout

△ SPECIFICATION

Current:1A
 Dielectric Strength:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:2~50 Contacts
 RoHS Compliant

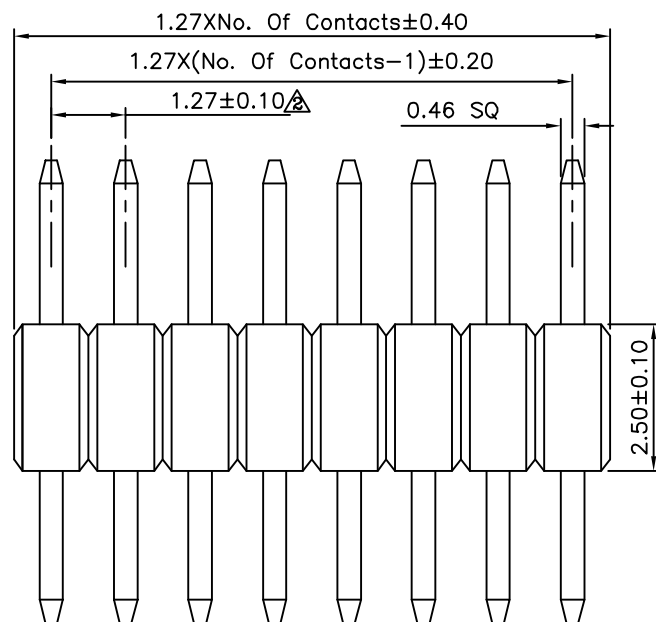

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16200

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

B2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	03/19/2013
△	B1	Modify Data	HZF	12/13/2010
△	B0	NEW RELEASE	HZF	03/19/2009