
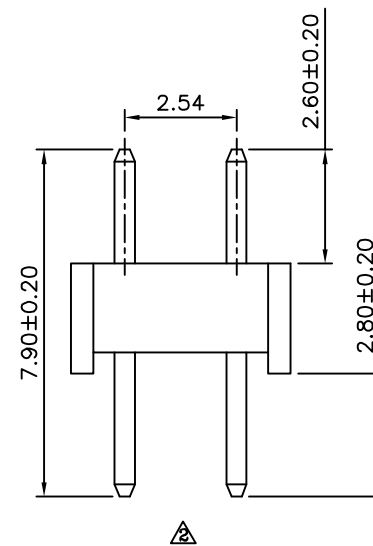
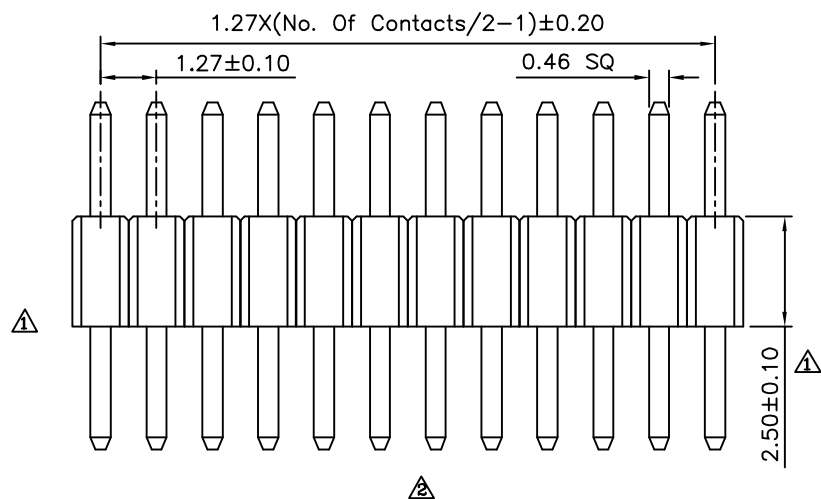


Recommended P.C.B. Layout

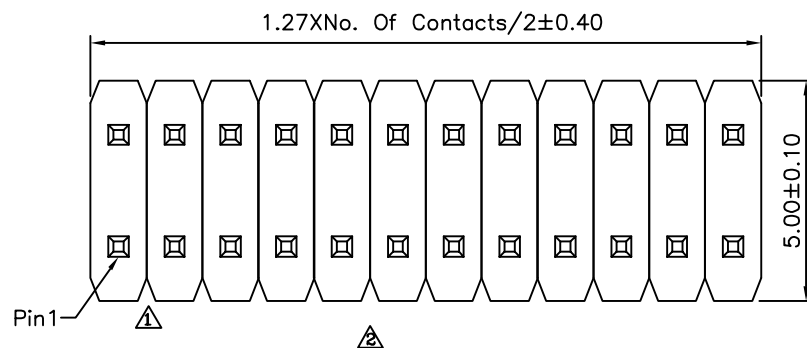

SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16239

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm

UNIT

mm

UNIT

mm

UNIT

mm

UNIT

mm

UNIT

mm

UNIT

mm

UNIT

mm

UNIT

mm

A2

Modify Data

HZF

06/28/2011

A1

Modify Data

HZF

09/25/2008

A0

NEW RELEASE

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

REVISIONS

CHK

DATE