


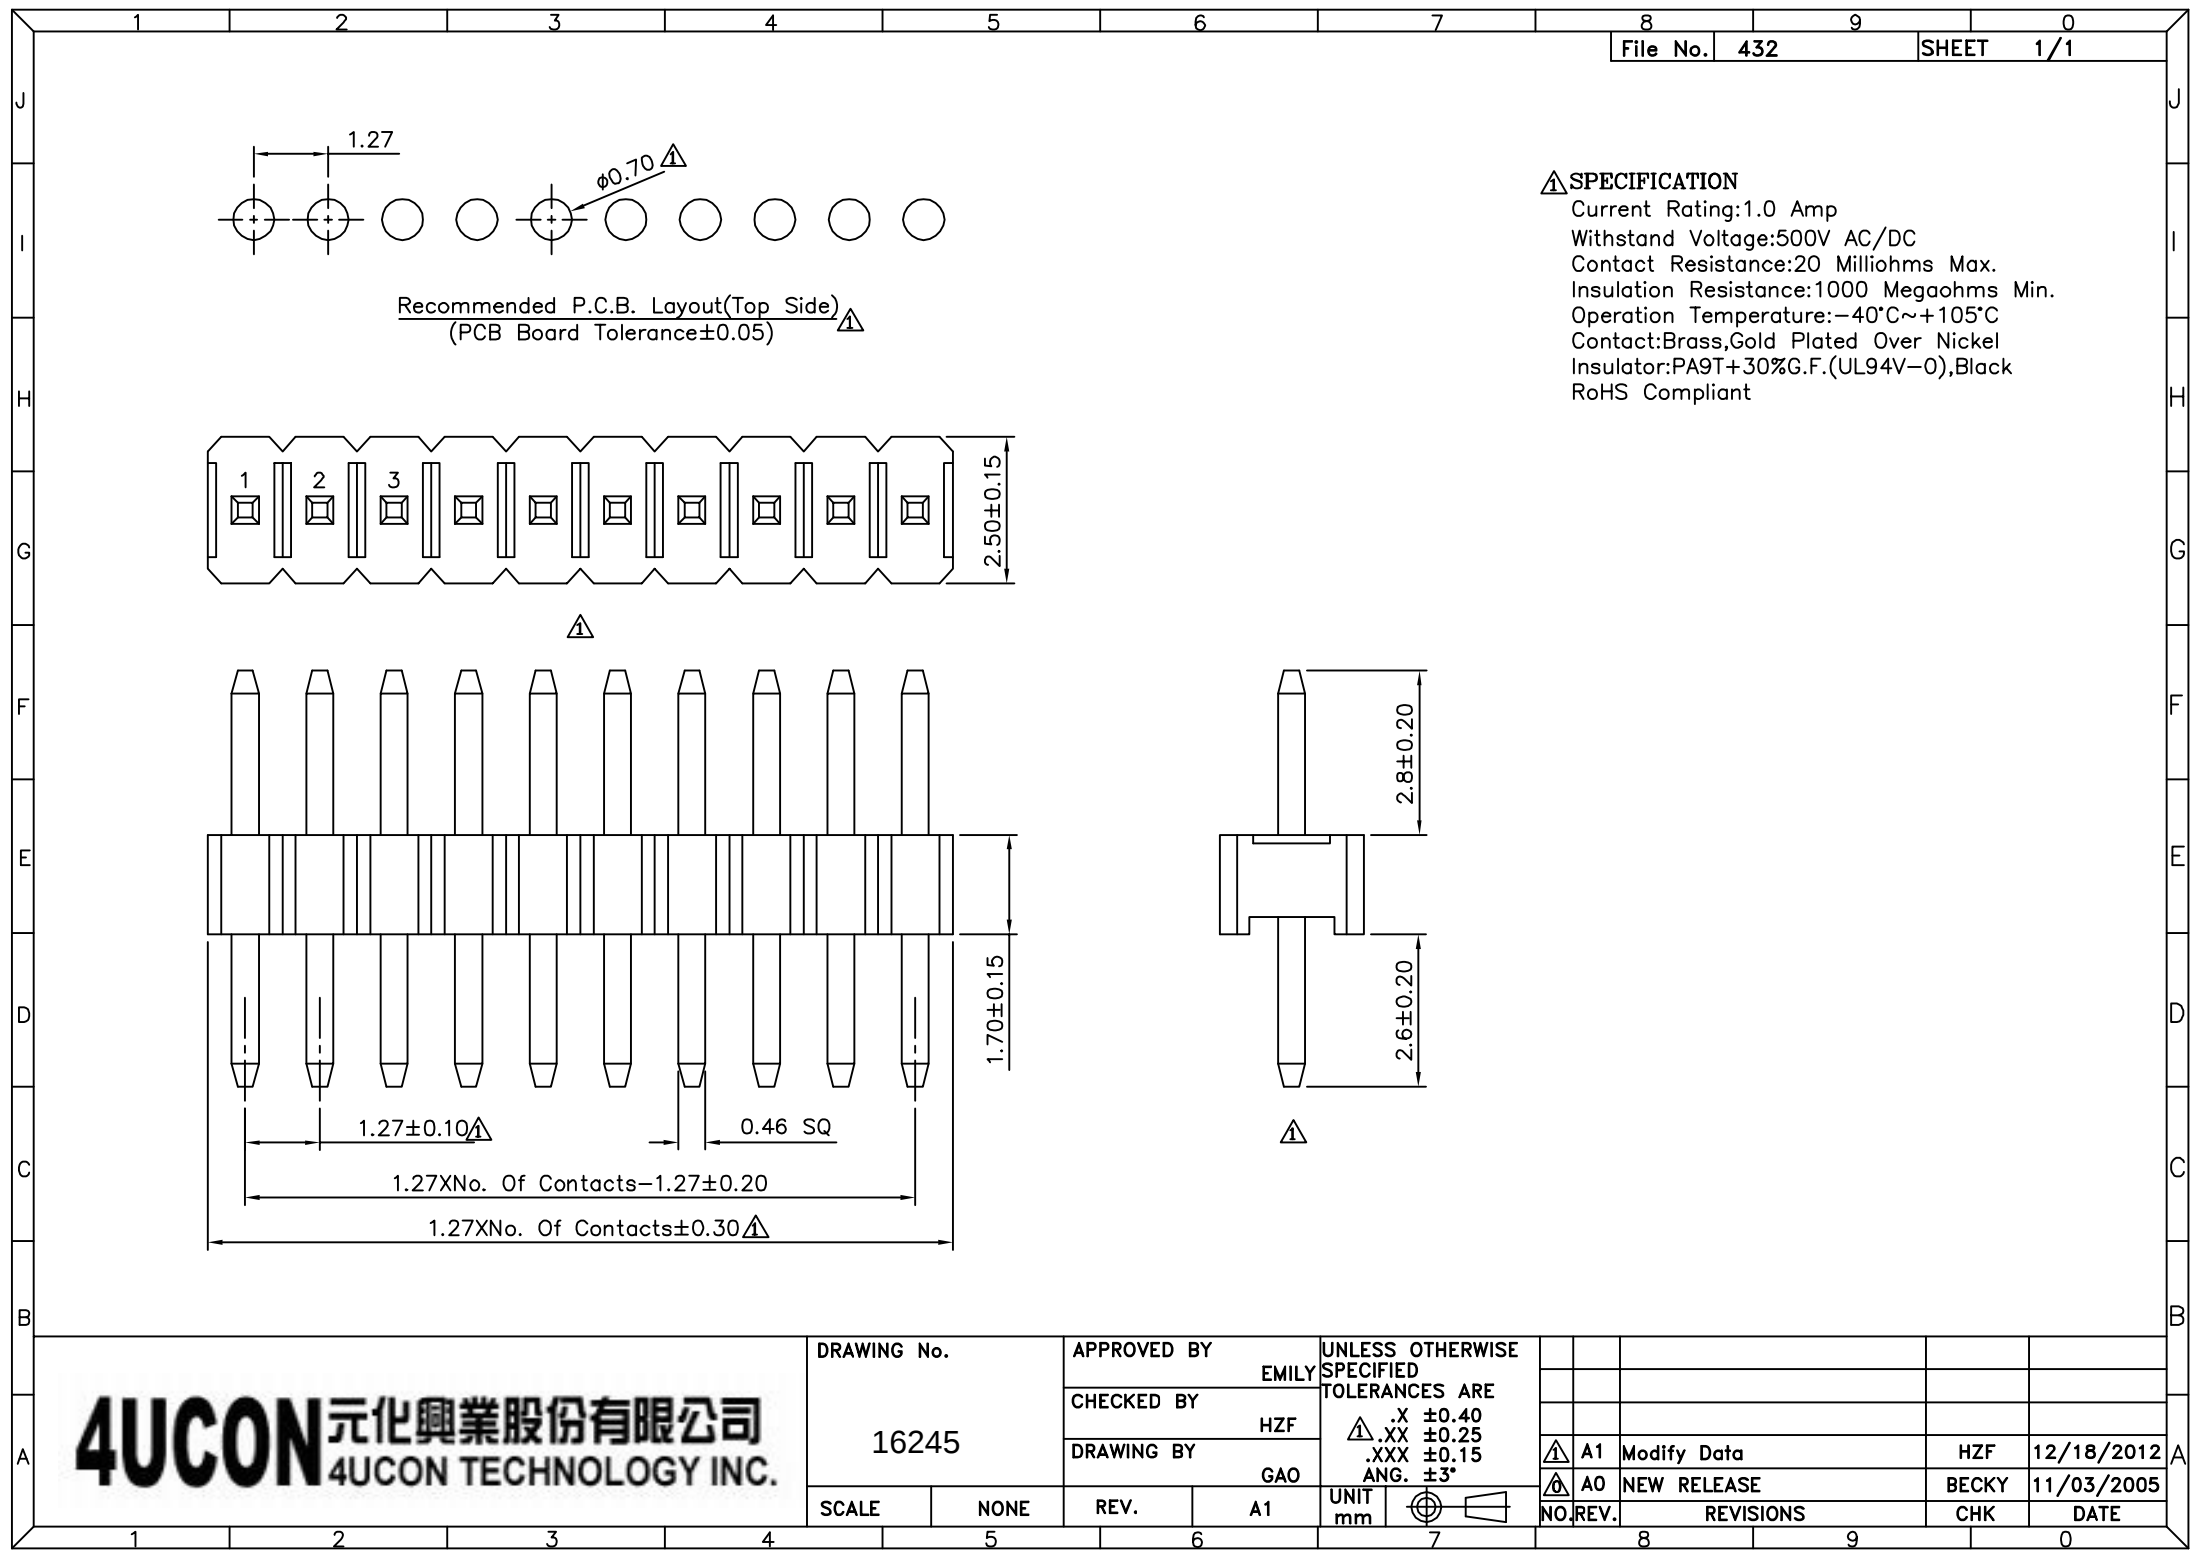

△ SPECIFICATION
Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 16245		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △.X ±0.40 △.XX ±0.25 △.XXX ±0.15 ANG. ±3°							
		EMILY									
		CHECKED BY									
		HZF									
DRAWING BY		GAO				△ A1	Modify Data		HZF	12/18/2012	A
						△ A0	NEW RELEASE		BECKY	11/03/2005	
						NO.	REV.	REVISIONS	CHK	DATE	
SCALE	NONE	REV.	A1	UNIT mm							
5		6		7		8		9		0	