



### 3.2 SPECIFICATION


Current Rating: 3 Amps/Contact Max.  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megaohms Min. At 100V  
 Operating Voltage: 60V AC/DC  
 Operation Temperature: -40°C~+105°C  
 Pin(Outer Sleeve): Brass, Tin Plated Over All, Over Nickel  
 Insulator: PPS(UL94V-0), Black  
 RoHS Compliant

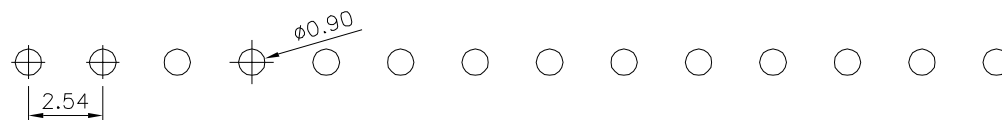


Recommended P.C.B. Layout

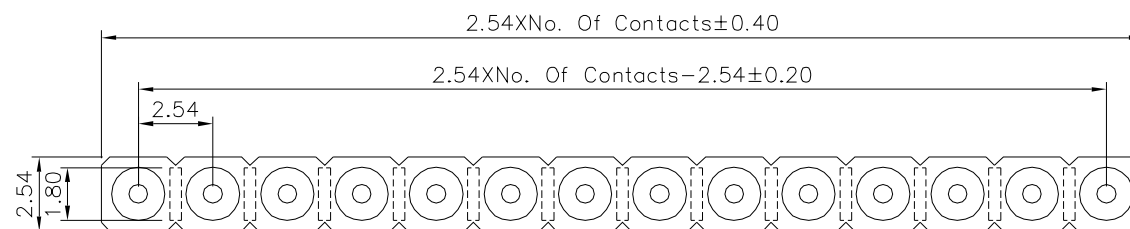


2

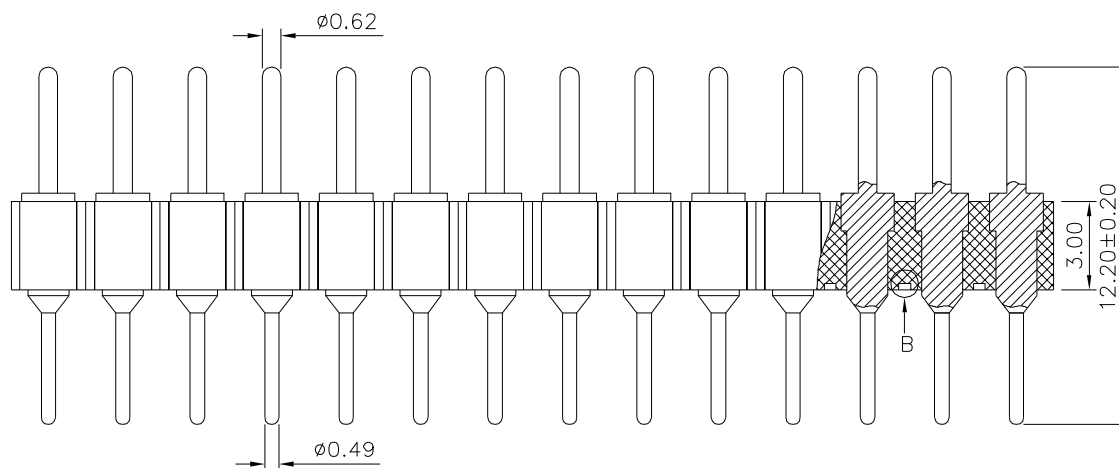

2

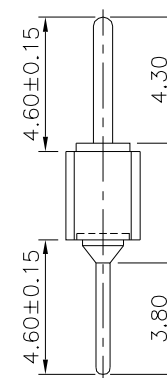

2



Dteail:B

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

16688

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

X. ±0.50  
 .XX ±0.30  
 .XXX ±0.20  
 .XXX ±0.10  
 ANG. ±5°

UNIT  
 mm



| NO. | REV. | REVISIONS   | CHK   | DATE       |
|-----|------|-------------|-------|------------|
| 3   | A3   | Modify Data | HZF   | 12/14/2017 |
| 2   | A2   | Modify Data | HZF   | 03/17/2011 |
| 1   | A1   | Modify Data | BECKY | 05/05/2006 |
| 0   | A0   | NEW RELEASE | BECKY | 07/20/2005 |