



△△SPECIFICATION


Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operating Voltage: 60V AC/DC
 Operation Temperature: -40°C~+105°C
 Pin(Outer Sleeve): Brass, Tin Plated Over All, Over Nickel
 Insulator: PPS(UL94V-0), Black
 RoHS Compliant




△ Recommended P.C.B. Layout

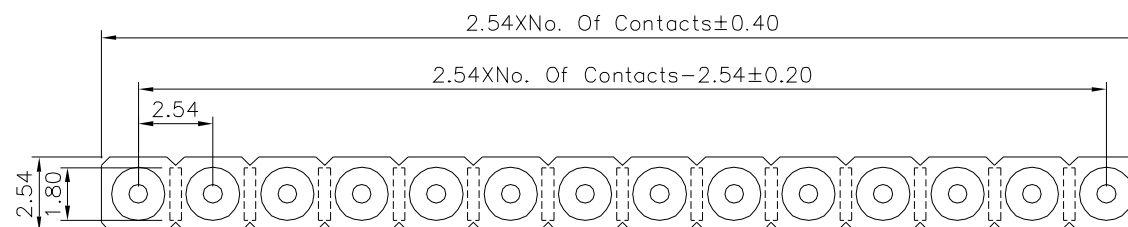


△

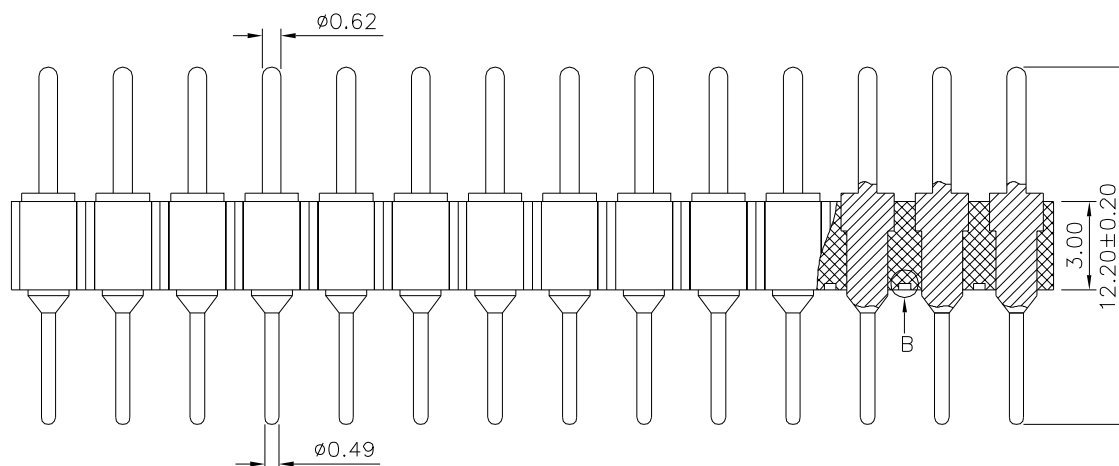

△

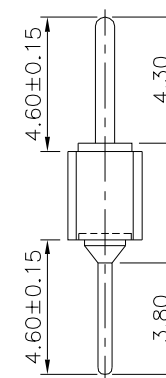

△



△ Detail: B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16702

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .XX ±0.30
 .XXX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	12/14/2017
△2	A2	Modify Data	HZF	03/17/2011
△1	A1	Modify Data	BECKY	05/05/2006
△0	A0	NEW RELEASE	BECKY	07/20/2005