


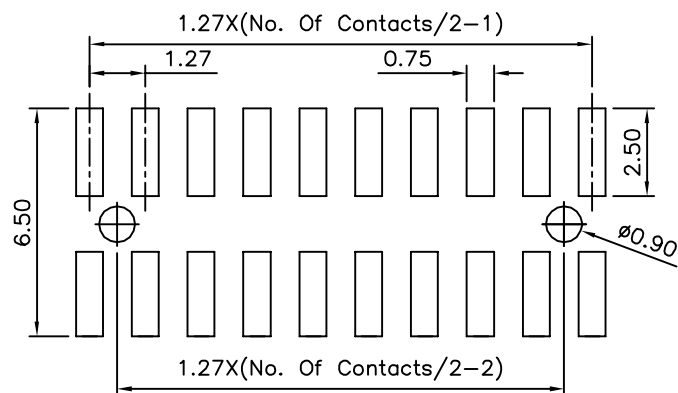


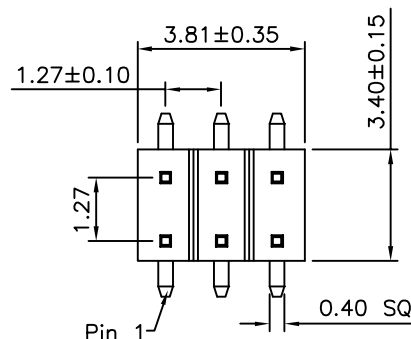



△ Recommended P.C.B. Layout




△ SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-O),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

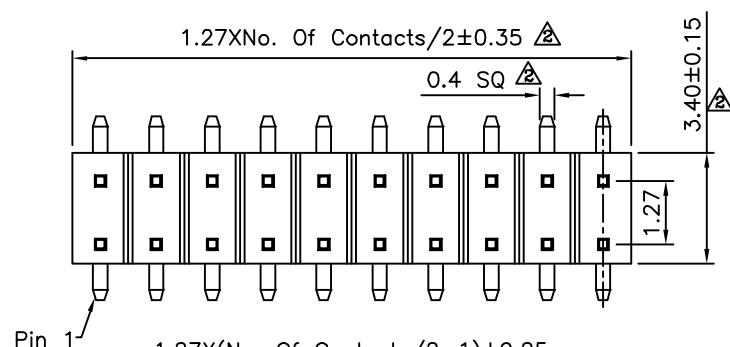

△ 06 Pin

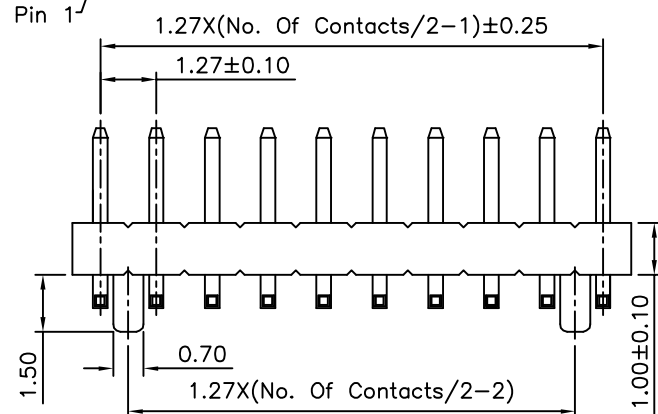

△ 2 08~100 Pin



2

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

16907

SCALE	NONE
-------	------

NONE

APPROVED BY	FAMILY
-------------	--------

CHECKED BY	H7F
------------	-----

DRAWING BY	WSS
------------	-----

REV.	A2
------	----

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.38
.XX	± 0.25
ANG.	$\pm 5^\circ$

UNIT	
------	--

	A2	Modify Data	HZF	07/29/2011
	A1	Modify Data	HZF	02/01/2007
	A0	NEW RELEASE	HZF	12/02/2008
NO	REV	REVISIONS	CHK	DATE