

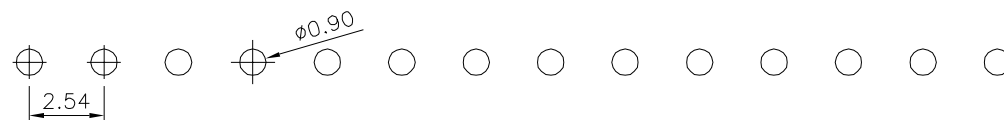

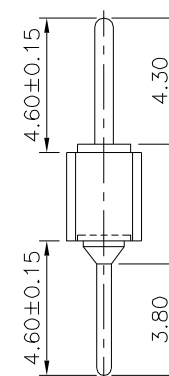


SPECIFICATION

Current Rating: 3 Amps/Contact Max.
Contact Resistance: 4 Milliohms Max./Contact
Insulation Resistance: 1000 Megaohms Min. At 100V
Operating Voltage: 60V AC/DC
Operating Temperature: -55°C~+105°C
Pin: Brass, Gold Flash Over All, Over Nickel
Insulator: PPS(UL94V-0), Black
RoHS Compliant

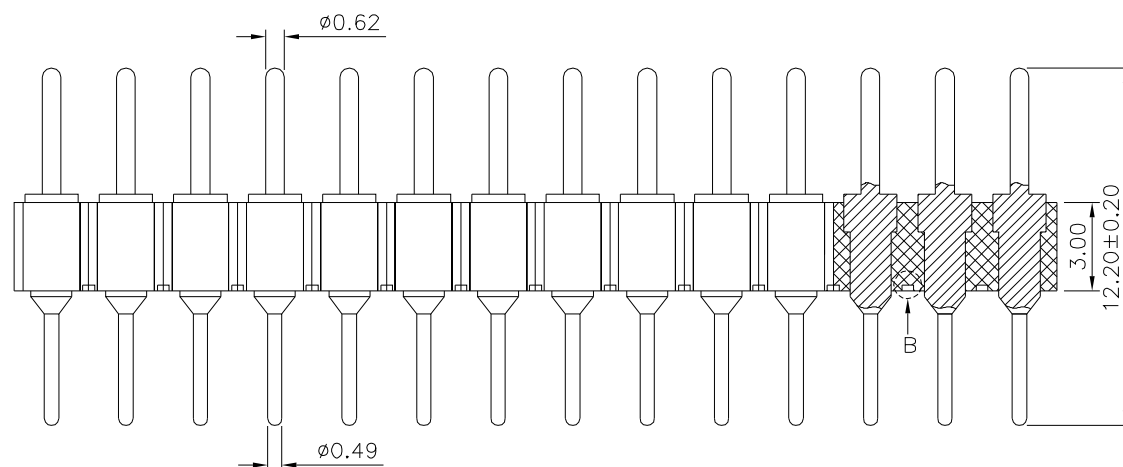

Recommended P.C.B. Layout

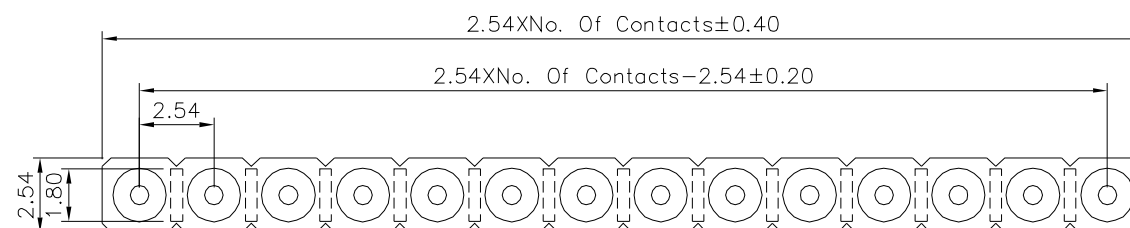

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

16961

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAC


REV.	
------	--

BO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	±0.50
.X	±0.30
.XX	±0.20
.XXX	±0.10
ANG.	±5°

	UNIT
	mm



0	B0
NO.	REV.

D	NEW RELEASE
V.	REVIS

REVISIONS

HZF	01/06/2016
CHK	DATE

HZF	01/06/2
CHK	DATE