


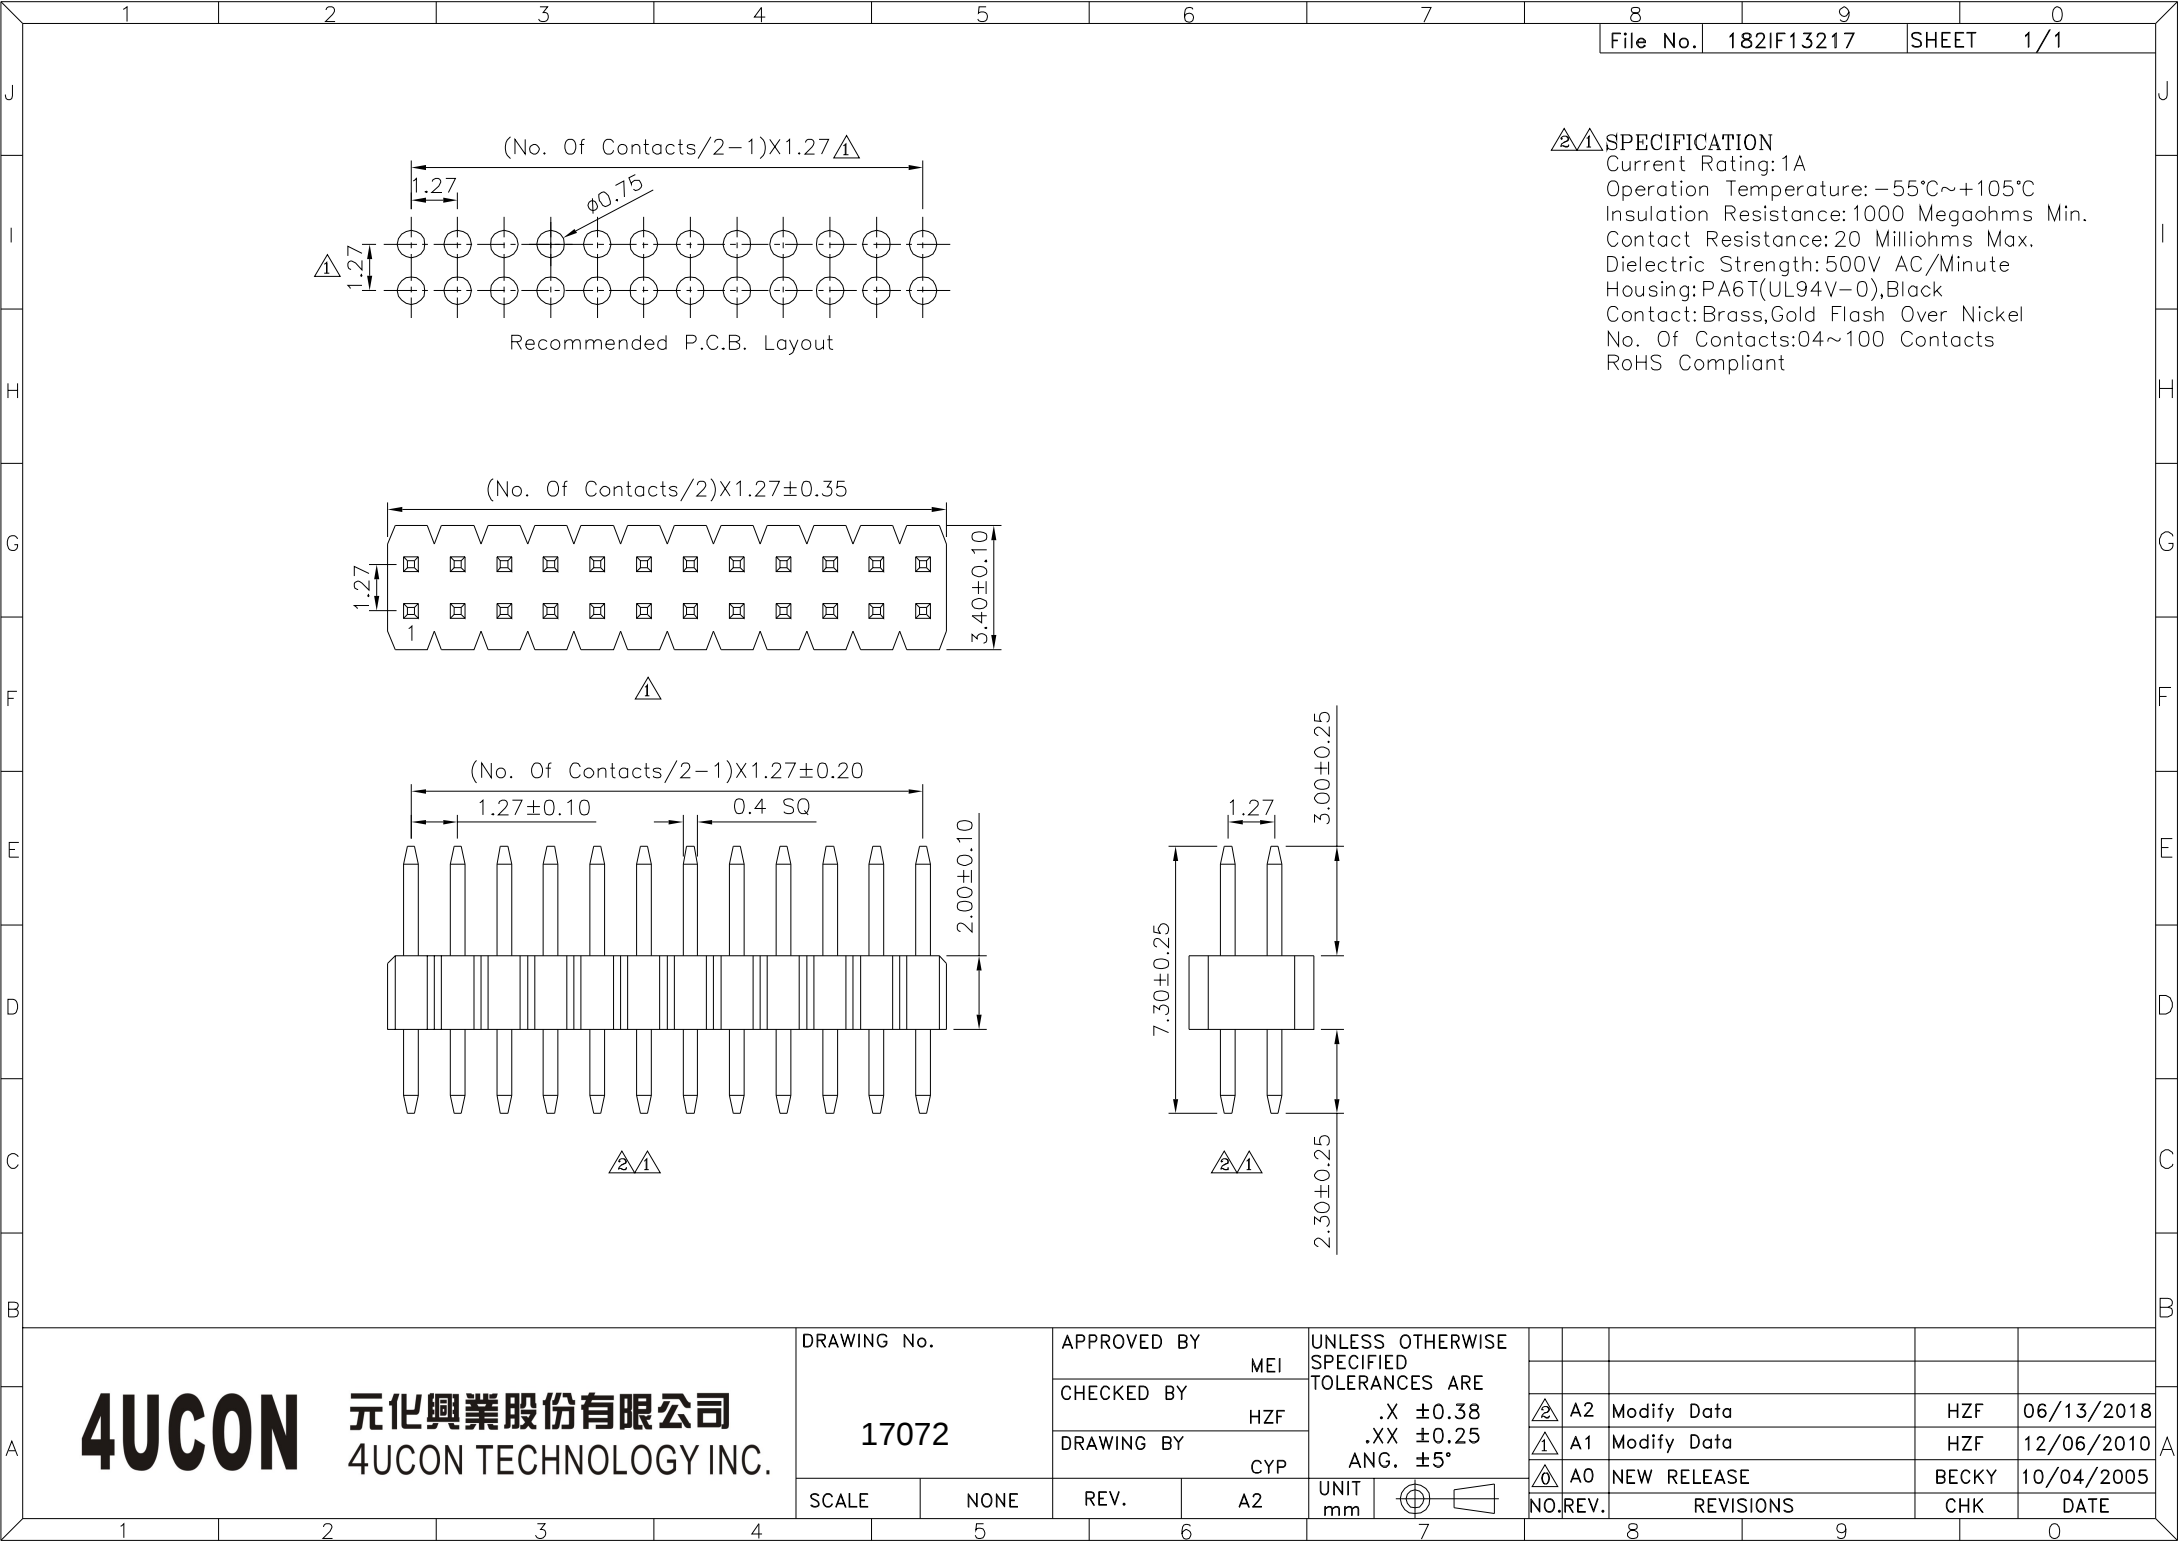


SPECIFICATION
Current Rating: 1A
Operation Temperature: -55°C~+105°C
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Strength: 500V AC/Minute
Housing: PA6T(UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
No. Of Contacts: 04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
17072		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
.X	±0.38		
.XX	±0.25		
ANG.	±5°		
UNIT	mm		



A2	Modify Data	HZF		06/13/2018	
A1	Modify Data	HZF		12/06/2010	
A0	NEW RELEASE	BECKY		10/04/2005	
NO. REV.	REVISIONS	CHK		DATE	