


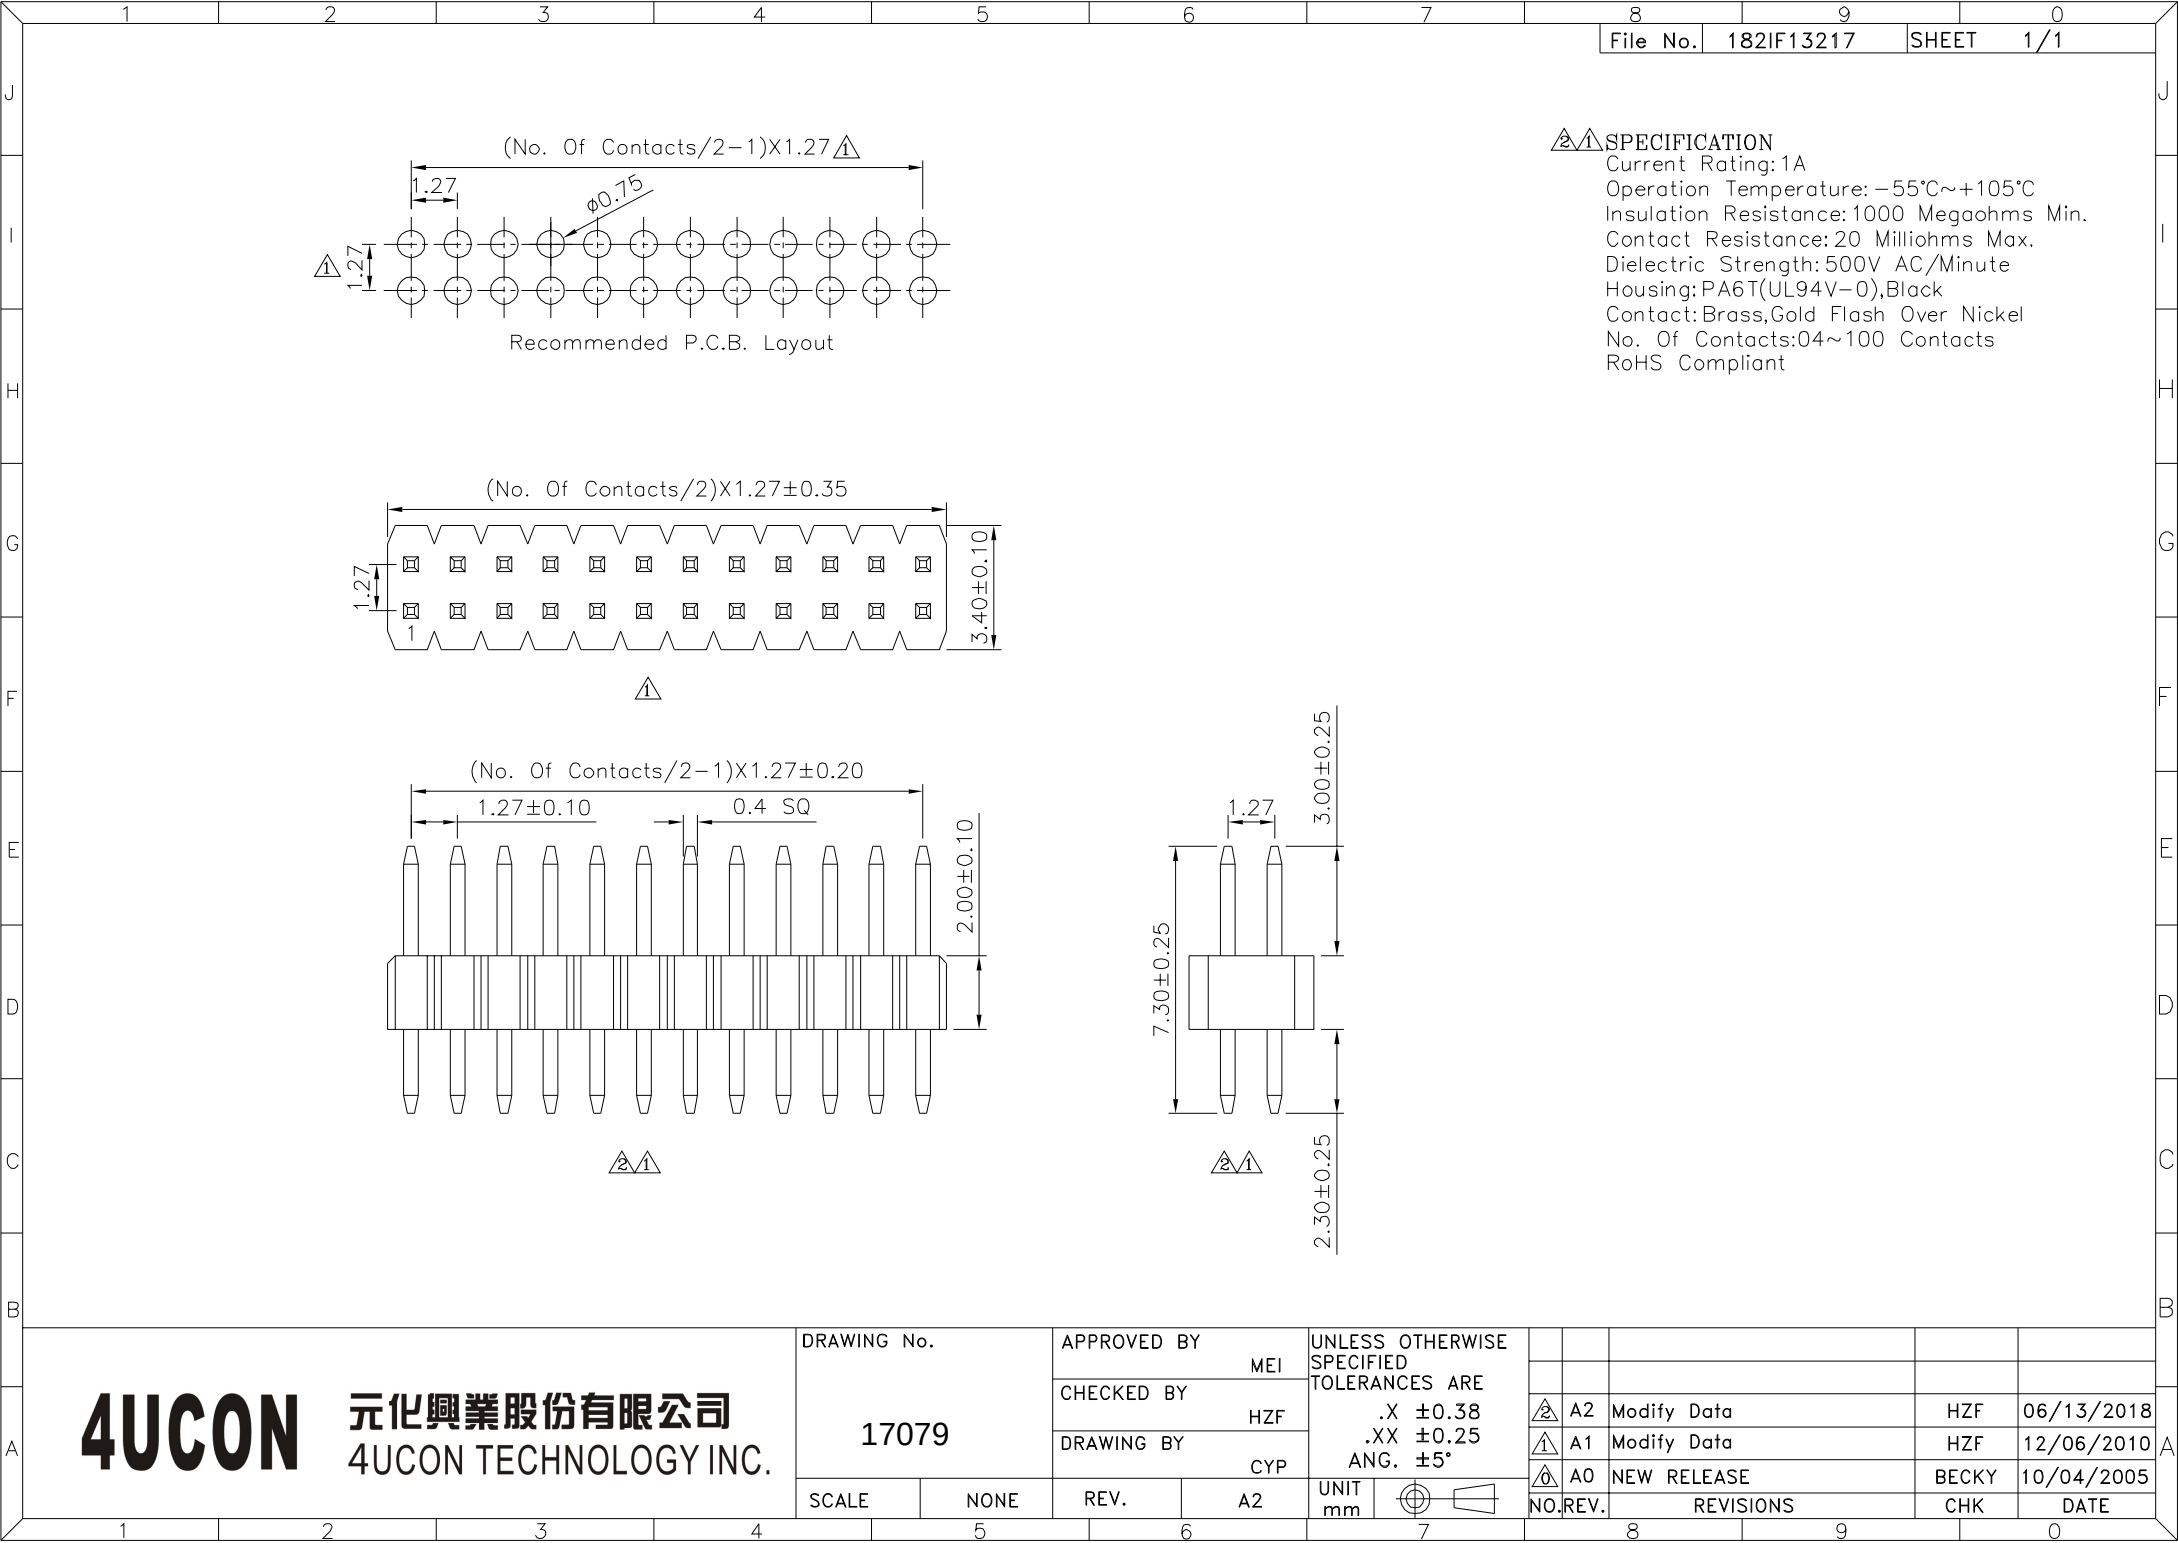

SPECIFICATION
Current Rating: 1A
Operation Temperature: -55°C~+105°C
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Strength: 500V AC/Minute
Housing: PA6T(UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
No. Of Contacts: 04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 17079		APPROVED BY MEI	
		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°		UNIT	mm
		REVISIONS	
		NO.	REV.

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	06/13/2018
A1		Modify Data	HZF	12/06/2010
A0		NEW RELEASE	BECKY	10/04/2005