

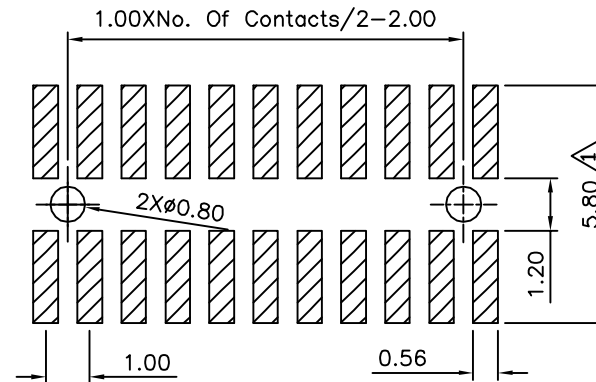
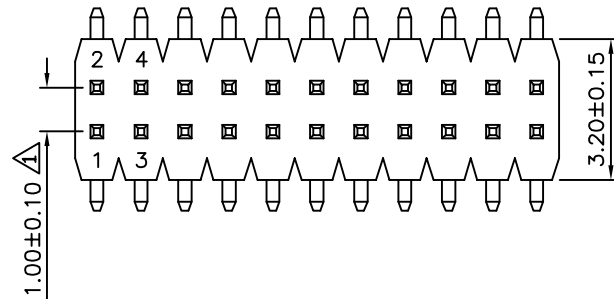


SPECIFICATION

Current Rating: 0.75 Amp
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C~+105°C
 ⚠ Insulator: PA9T+30%G.F.(UL94V-0),Black
 Contact: Brass,Gold Plated Over Nickel
 RoHS Compliant

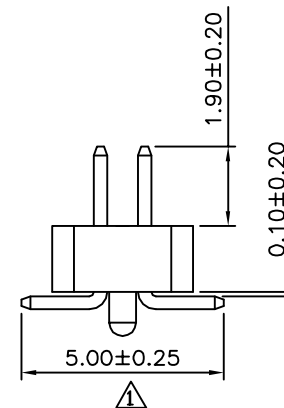

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05)

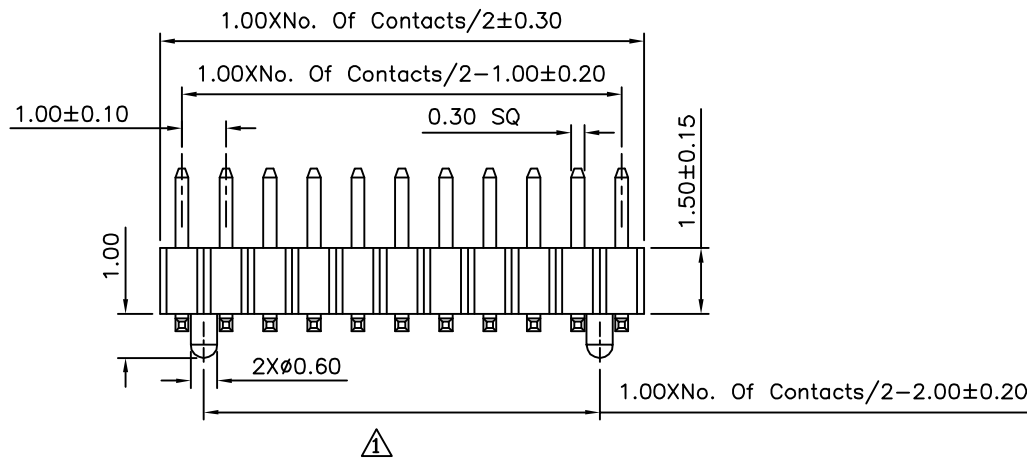

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17239

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ A2	Modify Spec.	HZF	11/22/2012	
⚠ A1	Modify Data	HZF	05/04/2012	
⚠ A0	NEW RELEASE	HZF	06/09/2010	