

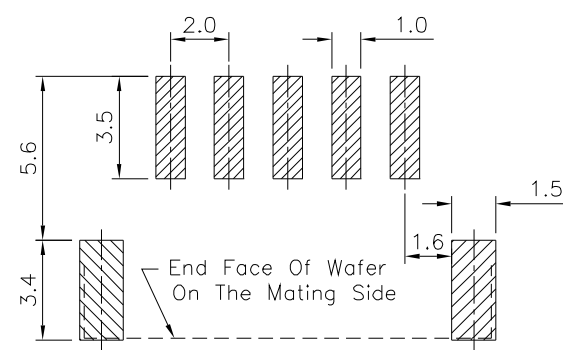
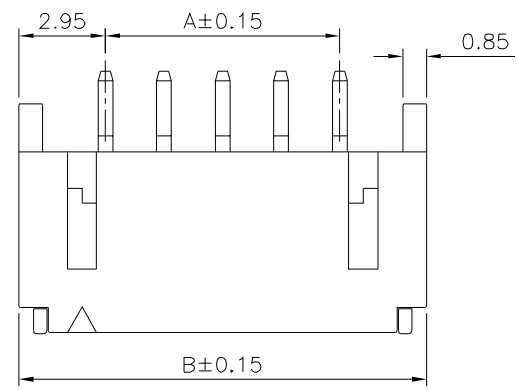
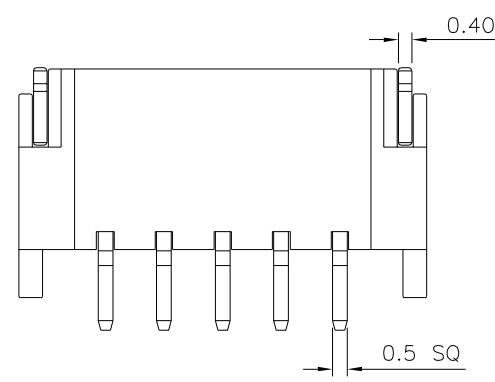


△ SPECIFICATION

Current Rating:2A AC/DC
Voltage Rating:100V AC/DC
Withstand Voltage:800V AC/Minute
Contact Resistance:Initial Value 10 Milliohms Max.
After Environmental Testing 20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-40°C~+85°C
Applicable PC Board Thickness:0.8~1.6mm
△3 Insulator:HTN(UL94V-0)
△2 Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

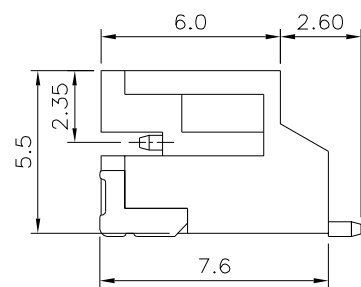

Recommended P.C.Board Layout △1

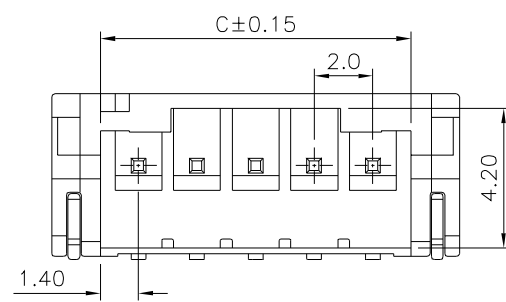

△1△2	Pin	A	B	C
	2	2.00	8.00	4.80
	3	4.00	10.00	6.80
	4	6.00	12.00	8.80
	5	8.00	14.00	10.80
	6	10.00	16.00	12.80
	7	12.00	18.00	14.80
	8	14.00	20.00	16.80
	9	16.00	22.00	18.80
	10	18.00	24.00	20.80
	11	20.00	26.00	22.80
	12	22.00	28.00	24.80
	13	24.00	30.00	26.80
	14	26.00	32.00	28.80
	15	28.00	34.00	30.80
	16	30.00	36.00	32.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △1 17323		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △2 △1 .X ±0.3 .XX ±0.2 ANG.						
		MEI				△3 A3	Modify Data	HZF	08/14/2018	
		CHECKED BY				△2 A2	Modify Data	HZF	10/04/2013	
		HZF				△1 A1	Modify Data	HZF	08/09/2012	
		DRAWING BY		CYP		△0 A0	NEW RELEASE	HZF	12/27/2007	A
SCALE	NONE	REV.	A3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE	