
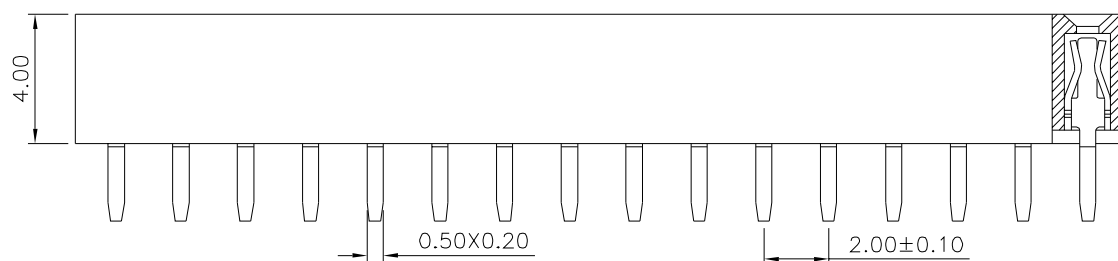



△ SPECIFICATION

Current Rating:1.5 Amp/Contact
 Withstand Voltage:450V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

Recommended P.C.B. Layout

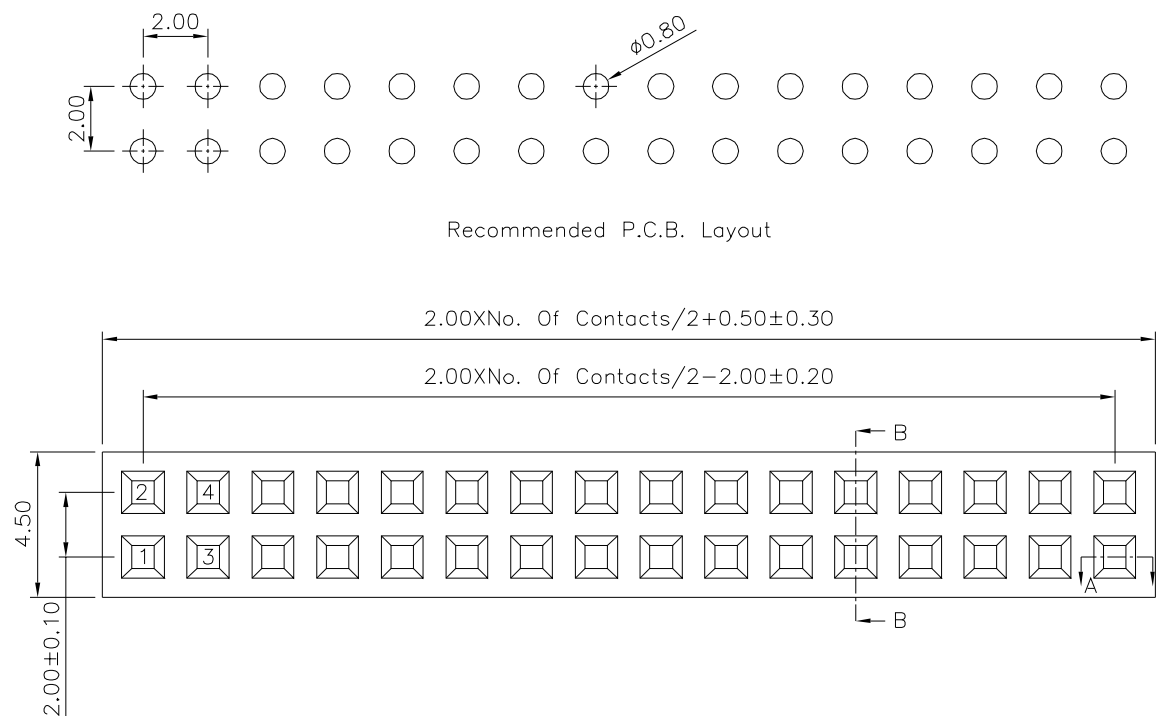

Section A-A



Section B-B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17432

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT
 mm



⚠	A1	Modify Data	HZF	10/16/2013
⚠	A0	NEW RELEASE	HZF	11/30/2011
NO.REV.	REVISIONS		CHK	DATE