




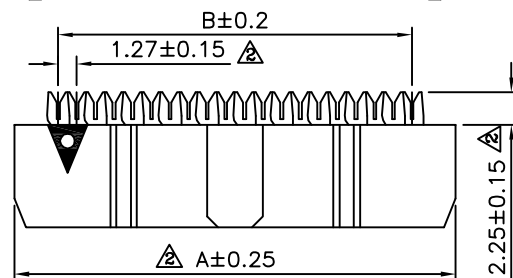

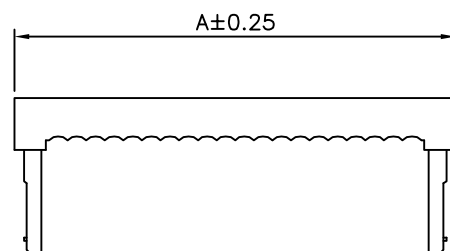



△ SPECIFICATION

Contact Resistance:1 Ohms Max.
 Insulation Resistance:100 Megaohms Min. At DC 500V
 Withstanding Voltage:500V AC For 1 Minute
 Operation Temperature:-40°C~+105°C
 Insulator:PBT+G.F.(UL94V-0),Black
 △ Contact:Brass,Selective Gold Flash Over Nickel
 RoHS Compliant

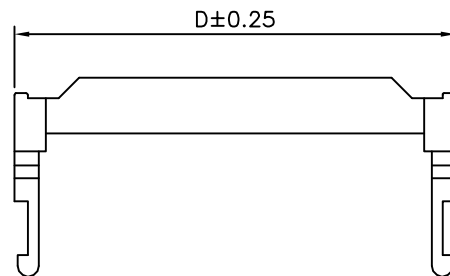

△ 6~12P

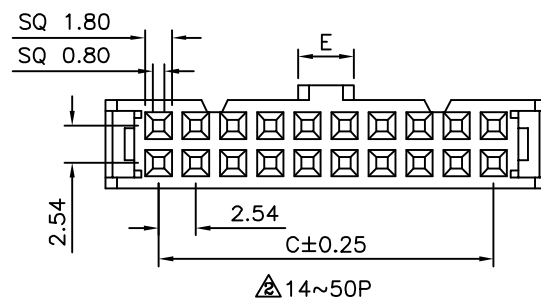

△△△

Pin	A	B	C	D	E
6	12.32	6.35	5.08	12.12	1.9
8	14.86	8.89	7.62	14.66	1.9
10	17.40	11.43	10.16	17.20	3.8
12	19.94	13.97	12.70	19.74	3.8
14	22.48	16.51	15.24	22.28	3.8
16	25.02	19.05	17.78	24.82	3.8
20	30.10	24.13	22.86	29.90	3.8
24	35.18	29.21	27.94	34.98	3.8
26	37.72	31.75	30.48	37.52	3.8
30	42.80	36.83	35.56	42.60	3.8
34	47.88	41.91	40.64	47.68	3.8
40	55.50	49.53	48.26	55.30	3.8
50	68.20	62.23	60.96	68.00	3.8

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17502

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △△ X. ±0.30
 △△ .X ±0.20
 .XX ±0.10
 .XXX ±0.05

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	B3	Modify Data	HZF	06/24/2015
△	B2	Modify Data	HZF	09/24/2010
△	B1	Del Pin#60,Pin#64	HZF	11/28/2007
△	B0	NEW RELEASE	BECKY	04/04/2006

SCALE NONE

REV.

B3