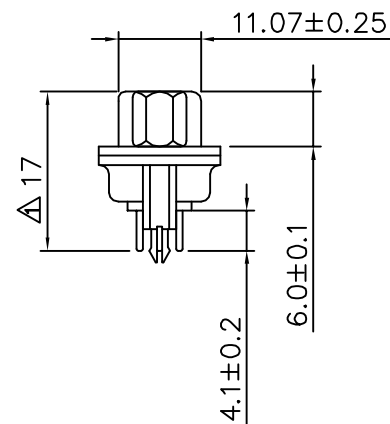
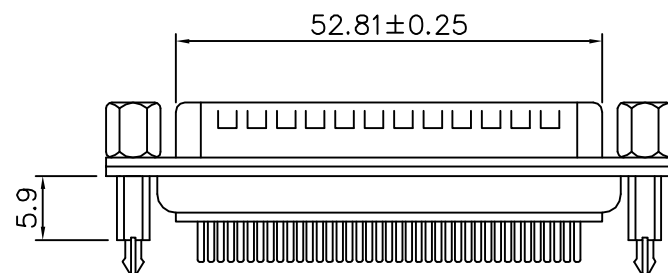
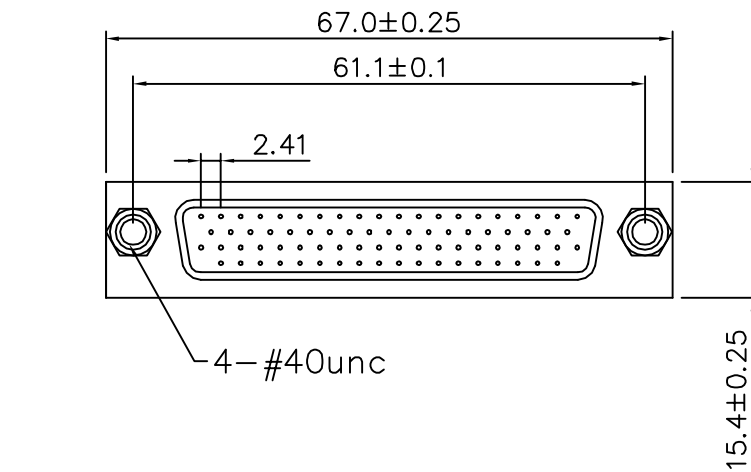


**SPECIFICATIONS**

Current Rating : 1 AMP

Dielectric Withstanding Voltage:AC 500V RMS

Insulation Resistance:500Megohms Min.At DC 500V

Contact Resistance:30 Milliohms Max.

Operating Temperature:-55°C To 105°C

Contact :Brass,Gold Flashed

Insulator:PBT,UL 94V-0

Shell:Cold Rolled Steel,Nickel,Tin ,Zinc Plated,

DRAWING No.

17516

APPROVED BY

MEI

CHECKED BY

LHC

DRAWING BY

HZF

SCALE

NONE

REV.

A1

UNIT

mm

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

.XXX



NO.

REV.

A1

Add Dim. 17

A0

NEW RELEASE

REVISIONS

CHK

DATE

SHIN

10/24/2006

DATE

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.