

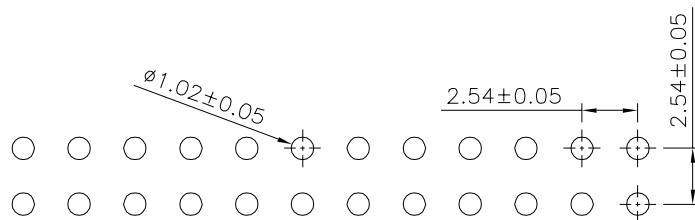


SPECIFICATION

Current Rating:3 Amp
 ⚠ Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

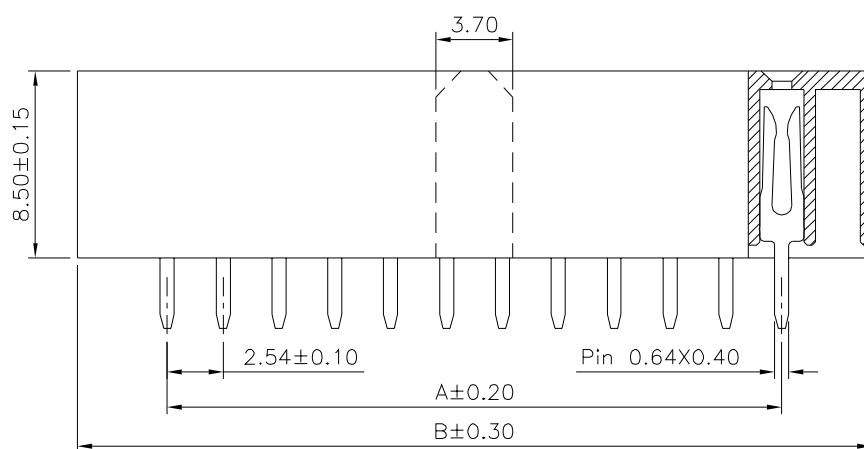

Recommended P.C.B. Layout

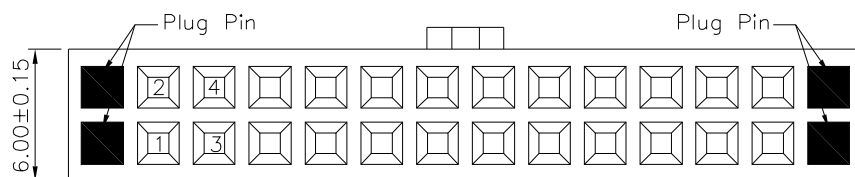

Pin	A	B	Pin	A	B
02	—	7.82	40	48.26	56.08
04	2.54	10.36	42	50.80	58.62
06	5.08	12.90	44	53.34	61.16
08	7.62	15.44	46	55.88	63.70
10	10.16	17.98	48	58.42	66.24
12	12.70	20.52	50	60.96	68.78
14	15.24	23.06	52	63.50	71.32
16	17.78	25.60	54	66.04	73.86
18	20.32	28.14	56	68.58	76.40
20	22.86	30.68	58	71.12	78.94
22	25.40	33.22	60	73.66	81.48
24	27.94	35.76	62	76.20	84.02
26	30.48	38.30	64	78.74	86.56
28	33.02	40.84	66	81.28	89.10
30	35.56	43.38	68	83.82	91.64
32	38.10	45.92	70	86.36	94.18
34	40.64	48.46	72	88.90	96.72
36	43.18	51.00	74	91.44	99.26
38	45.72	53.54	76	93.98	101.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17527

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG.

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ A1	Modify Data	HZF	12/26/2015	
⚠ A0	NEW RELEASE	HZF	01/31/2015	