

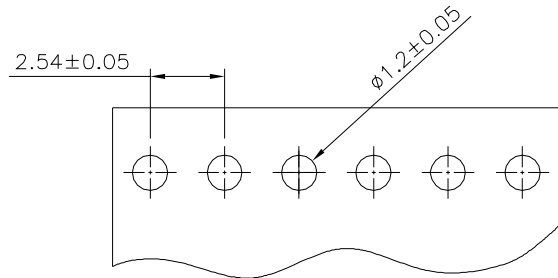
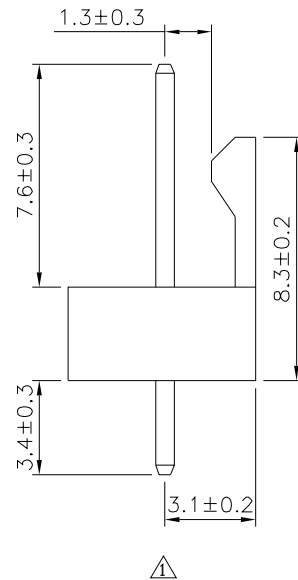


J  
I  
H  
G  
F  
E  
D  
C  
B  
A

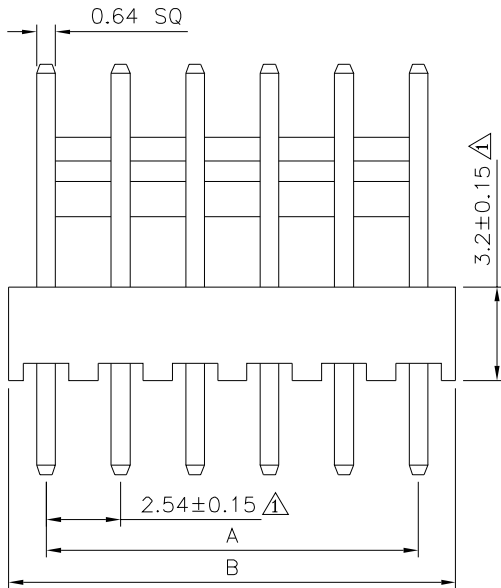

Recommended P.C.B. Layout  
PCB Board Thickness:1.6mm

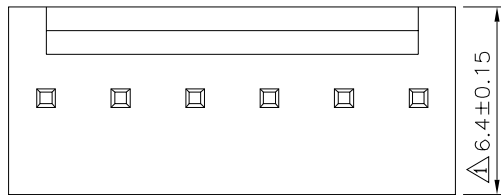

**△△ SPECIFICATION**  
Current Rating: 3A AC/DC  
Voltage Rating: 250V AC/DC  
Insulation Resistance: 1000 Megaohms Min.  
Contact Resistance: 20 Milliohms Max.  
Withstand Voltage: 1000V AC/Minute  
Temperature Range: -25°C~+85°C  
Insulator: PA66(UL94V-0),Brown  
Contact: Brass,Tin Plated  
RoHS Compliant

| Pin | A     | B     |
|-----|-------|-------|
| 2   | 2.54  | 5.10  |
| 3   | 5.08  | 7.68  |
| 4   | 7.62  | 10.24 |
| 5   | 10.16 | 12.78 |
| 6   | 12.70 | 15.24 |
| 7   | 15.24 | 17.88 |
| 8   | 17.78 | 20.44 |
| 9   | 20.32 | 23.00 |
| 10  | 22.86 | 25.54 |
| 11  | 25.40 | 28.10 |
| 12  | 27.94 | 30.64 |
| 13  | 30.48 | 33.20 |
| 14  | 33.02 | 35.74 |
| 15  | 35.56 | 38.30 |
| 16  | 38.10 | 40.84 |
| 17  | 40.64 | 43.40 |
| 18  | 43.18 | 45.94 |
| 19  | 45.72 | 48.50 |
| 20  | 48.26 | 51.05 |

△ Dim. A,B Tolerance As Follow:

| Pin  | A     | B     |
|------|-------|-------|
| 2~5  | ±0.15 | ±0.15 |
| 6~8  | ±0.20 | ±0.25 |
| 9~20 | ±0.30 | ±0.35 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.△△1  
17575

APPROVED BY  
MEI  
CHECKED BY  
HZF  
DRAWING BY  
CYP

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.5  
.X ±0.25  
.XX ±0.2  
.XXX ±0.08

UNIT  
mm

SCALE  
NONE

REV.  
B3

△ B3 Modify Data  
△ B2 Modify Data  
△ B1 Modify Data  
△ B0 NEW RELEASE

NO. REV.  
REVISIONS

CHK  
DATE

05/26/2018  
06/15/2015  
08/27/2010  
05/02/2007