
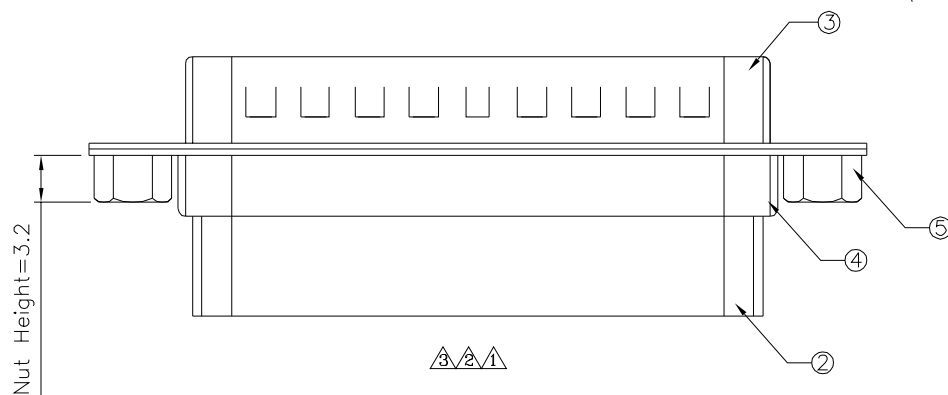
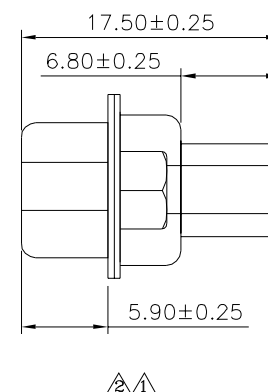


△△ SPECIFICATION

Current Rating:1A Max.
 Dielectric Withstanding Voltage:500V(AC)
 For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At DC 500V
 Temperature Range:-55°C~+105°C
 RoHS Compliant

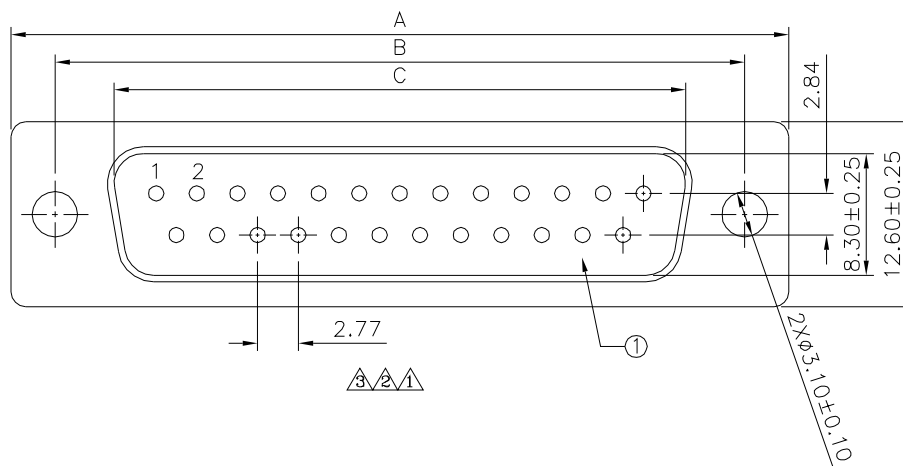

△△ Pin	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

⑤ Nut	2	Brass	Nickel Plated	
④ Back Shell	1	Cold Rolled Steel	Tin Plated Over Copper	
③ Front Shell	1	Cold Rolled Steel	Nickel Plated Over Copper	
② Back Housing	1	PA66(UL94V-0)	_____	
① Front Housing	1	PBT(UL94V-0),Black	_____	
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 17843

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	05/10/2018
△2	A2	Modify Data	HZF	08/20/2015
△1	A1	Modify Data	HZF	09/30/2010
△0	A0	NEW RELEASE	HZF	06/14/2006