


## SPECIFICATIONS

Applicable Wires:AWG # 10~12  
Max.Electric Rating:105°C 300V  
Max.Electric Current:24A  
Terminal:Brass,Tin PLated  
Insulator:Nylon ,Yellow

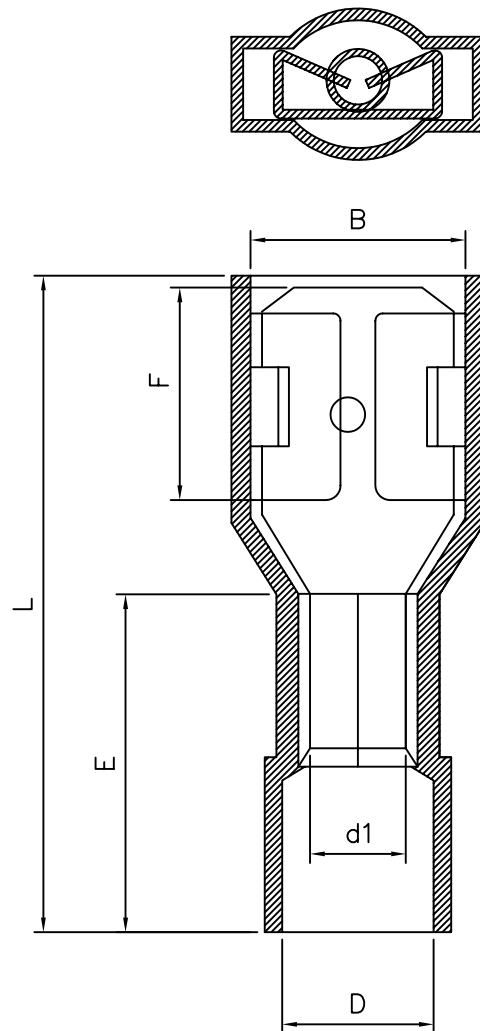

| Nema Tab | B±0.2 | L±1.0 | F±0.2 | E±0.8 | D±0.3 | d1±0.2 |
|----------|-------|-------|-------|-------|-------|--------|
| 0.8x6.4  | 6.6   | 24.5  | 7.9   | 13.0  | 5.5   | 3.4    |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

18130

APPROVED BY

MEI

CHECKED BY

LHC

DRAWING BY


HZF

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38

.XX ±0.25

.ANG

UNIT  
mm

AREA

REVISIONS

CHK

DATE