

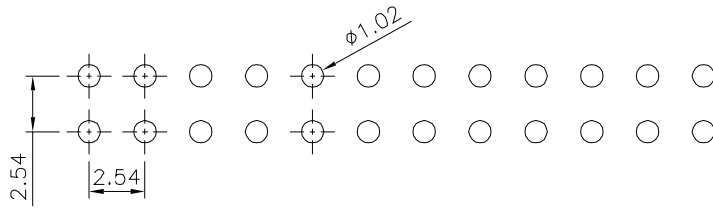


SPECIFICATION


Current Rating:3.0 Amp
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 ⚠ Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

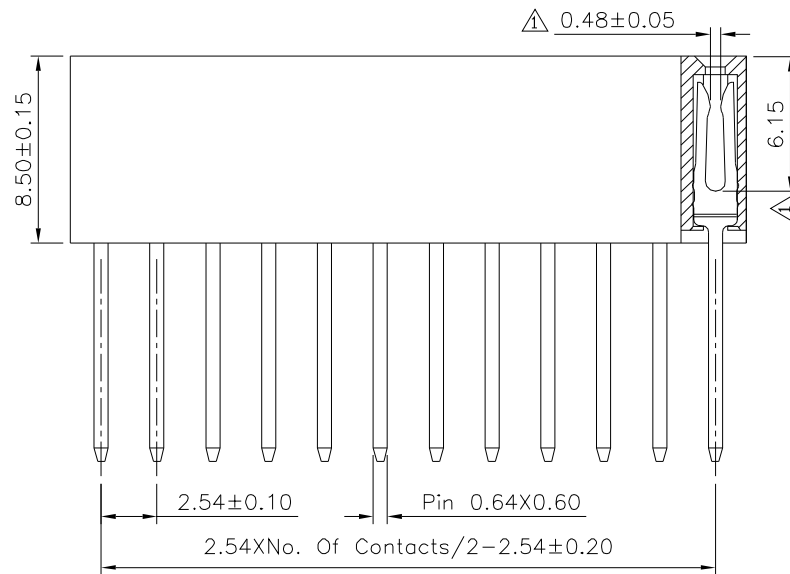

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05)

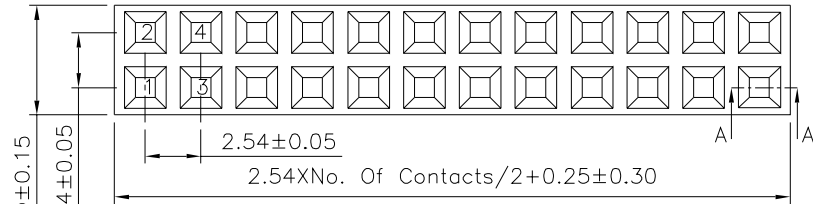

Section A-A

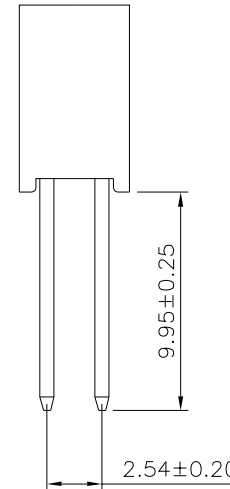

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18162

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



SCALE

NONE

REV.

A1

NO.

REV.

REVISIONS

CHK

DATE

A1

Modify Data

HZF

03/10/2020

A0

NEW RELEASE

HZF

11/06/2012