


SPECIFICATION

Current Rating:3.0 Amp
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−40°C~+105°C
 ⚠ Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V−0),Black
 RoHS Compliant

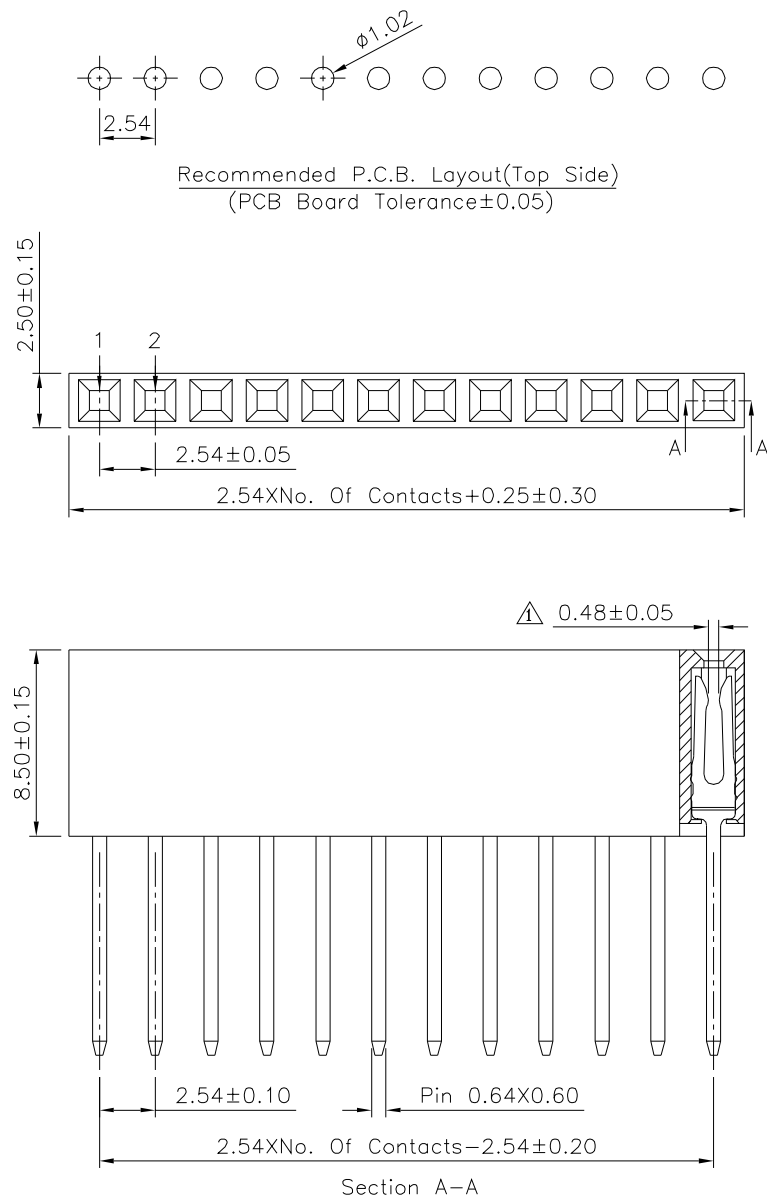

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18163

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ± 0.40
 .XX ± 0.25
 .XXX ± 0.15
 ANG. $\pm 3^\circ$


SCALE

NONE

REV.

A1

UNIT
 mm



⚠ A1	Modify Data		HZF	03/10/2020	
⚠ A0	NEW RELEASE		HZF	10/16/2012	
NO. REV.	REVISIONS	CHK	DATE		