


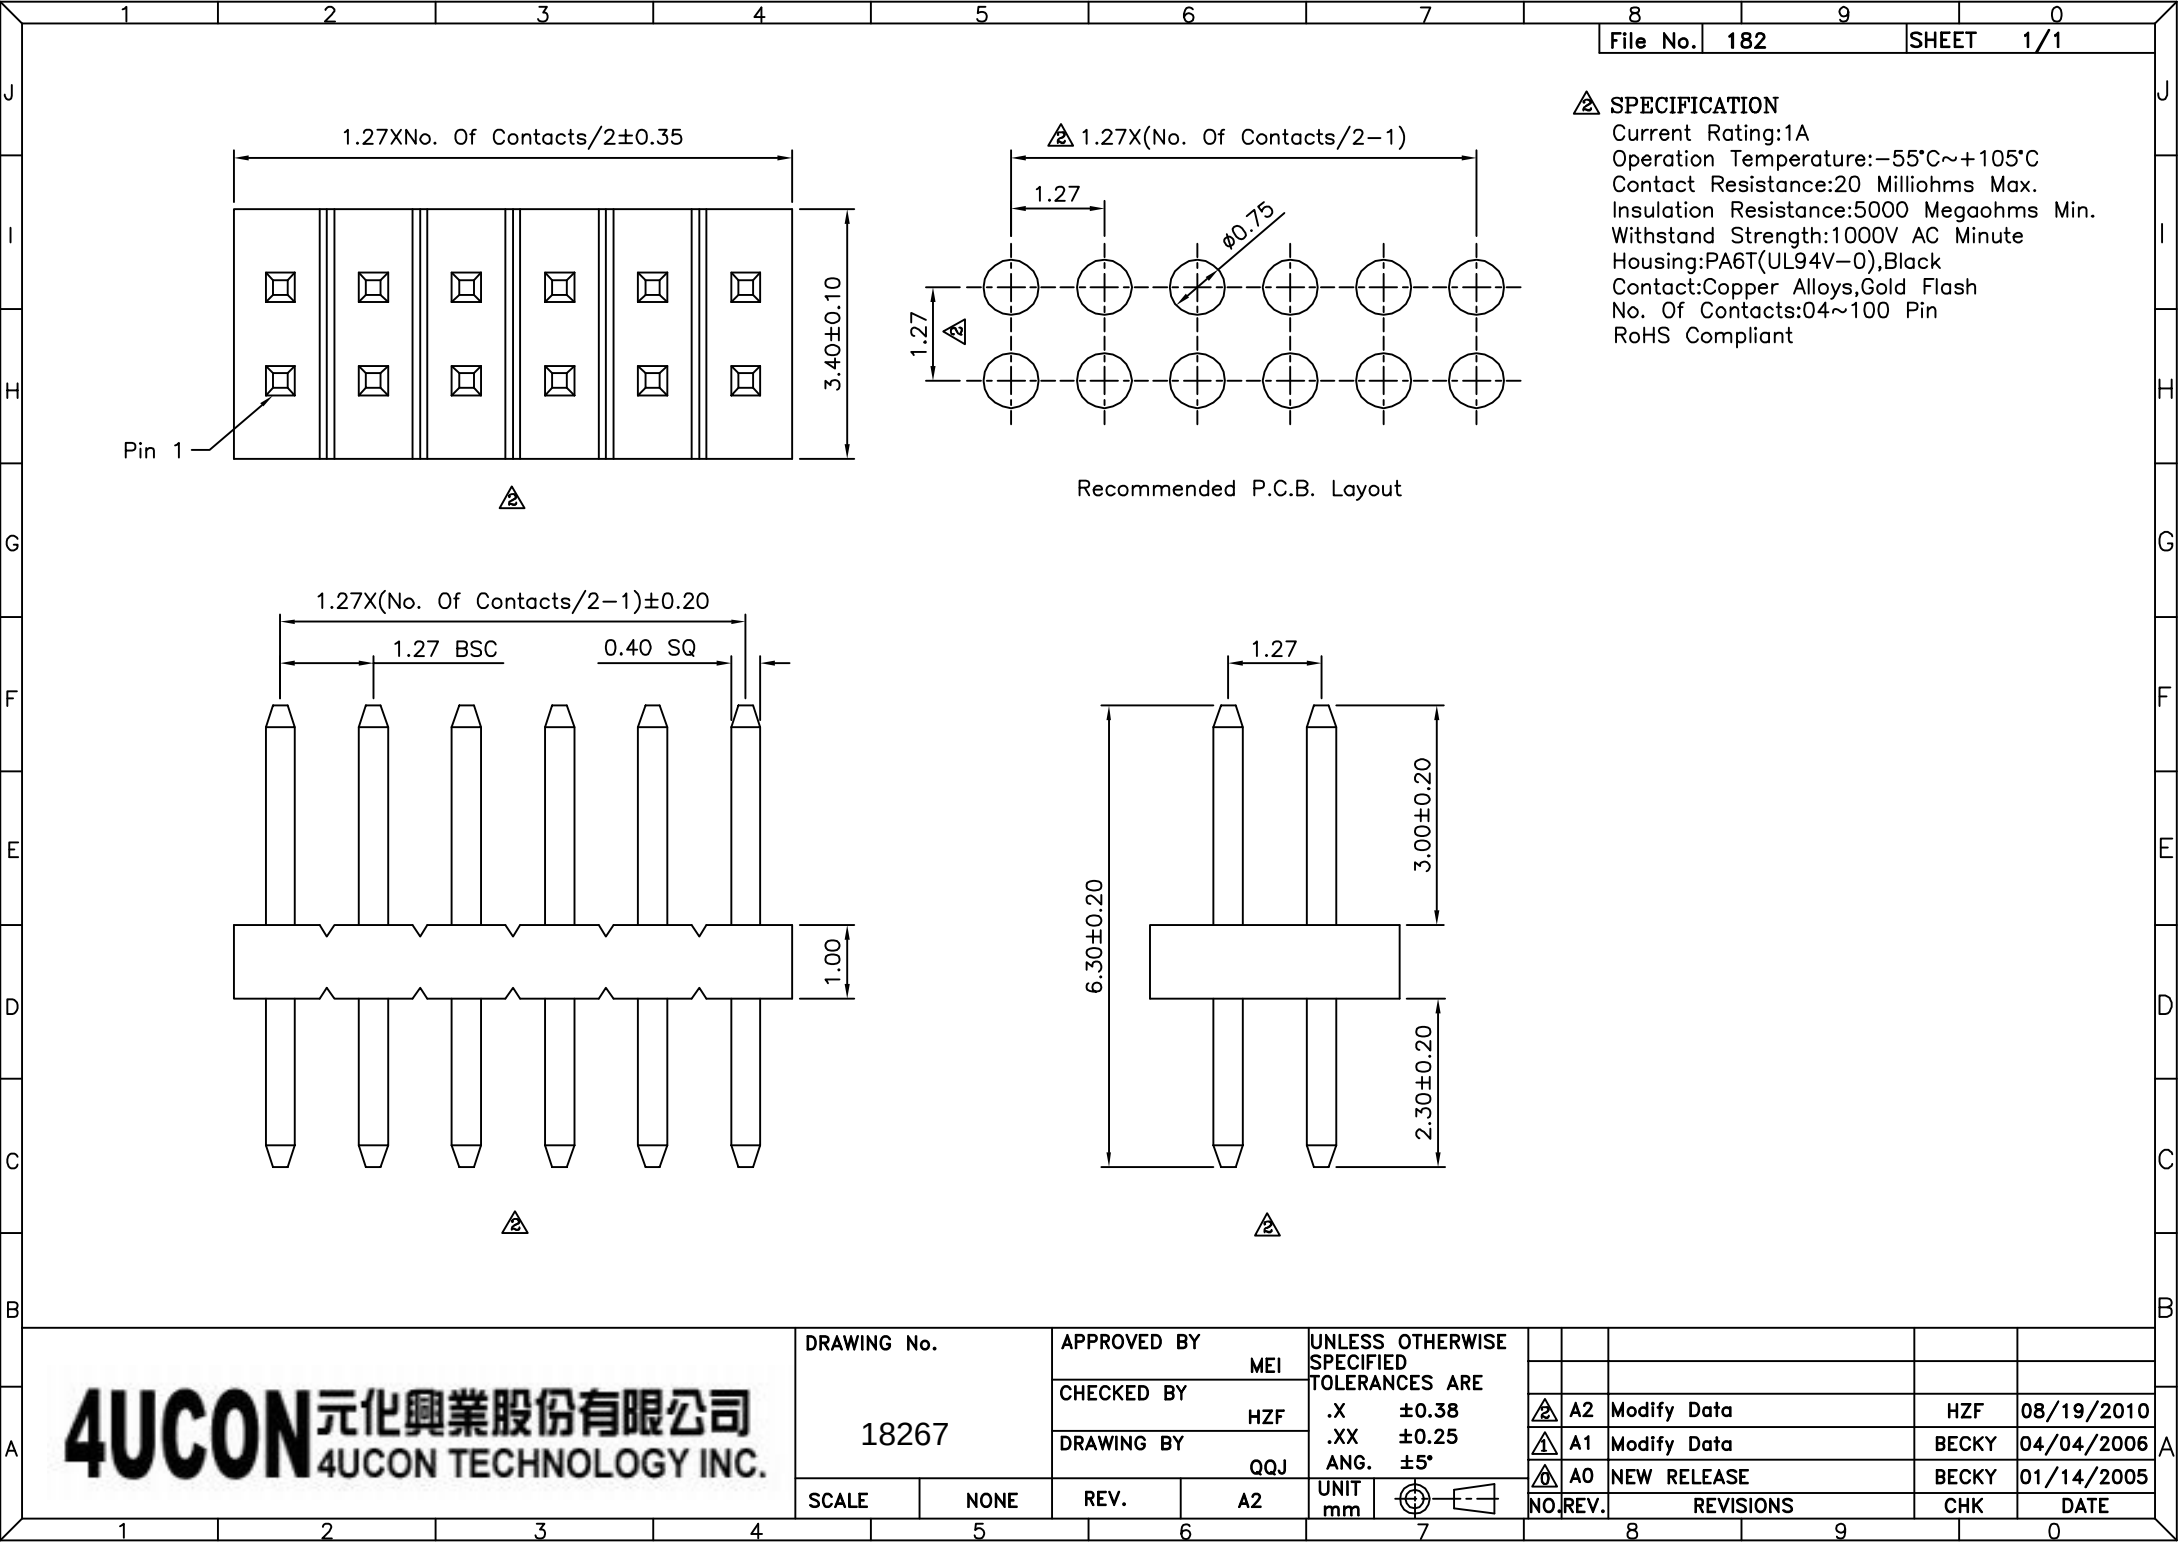

△ SPECIFICATION
Current Rating:1A
Operation Temperature:−55°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Withstand Strength:1000V AC Minute
Housing:PA6T(UL94V−0),Black
Contact:Copper Alloys,Gold Flash
No. Of Contacts:04~100 Pin
RoHS Compliant

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18267

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



△ A2

Modify Data

HZF

08/19/2010

△ A1

Modify Data

BECKY

04/04/2006

△ A0

NEW RELEASE

BECKY

01/14/2005

NO. REV.

REVISIONS

CHK

DATE