

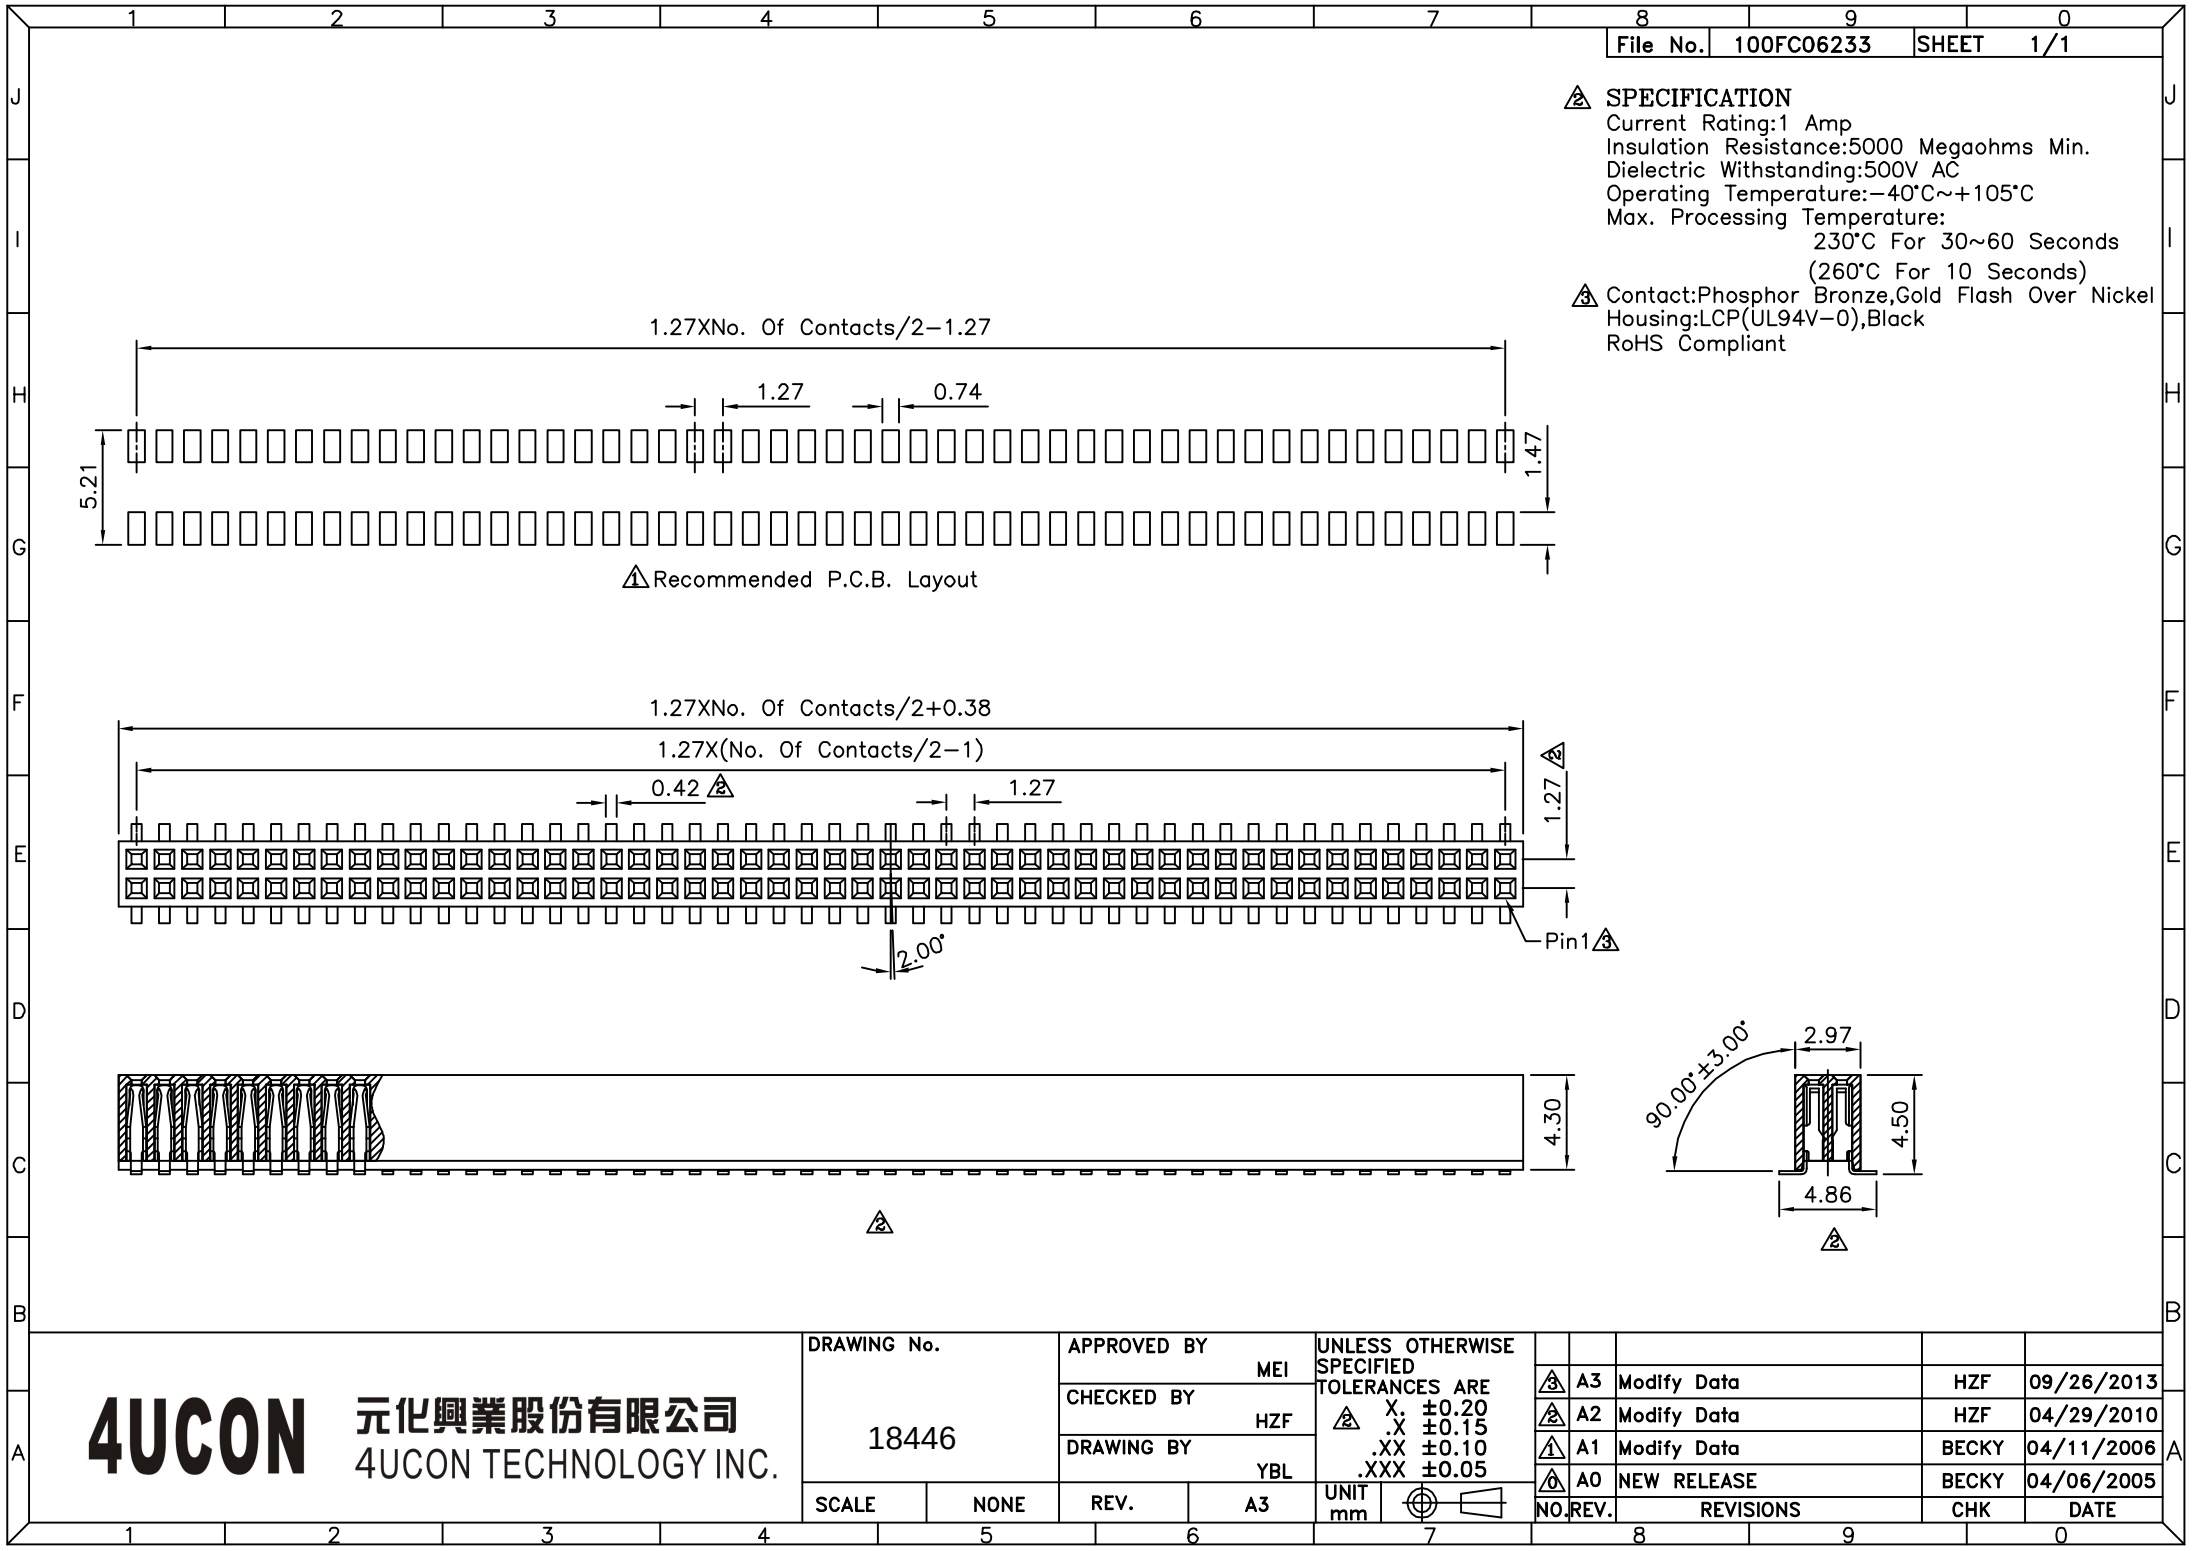

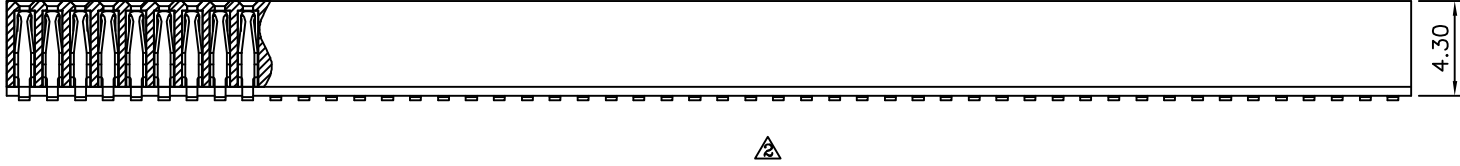


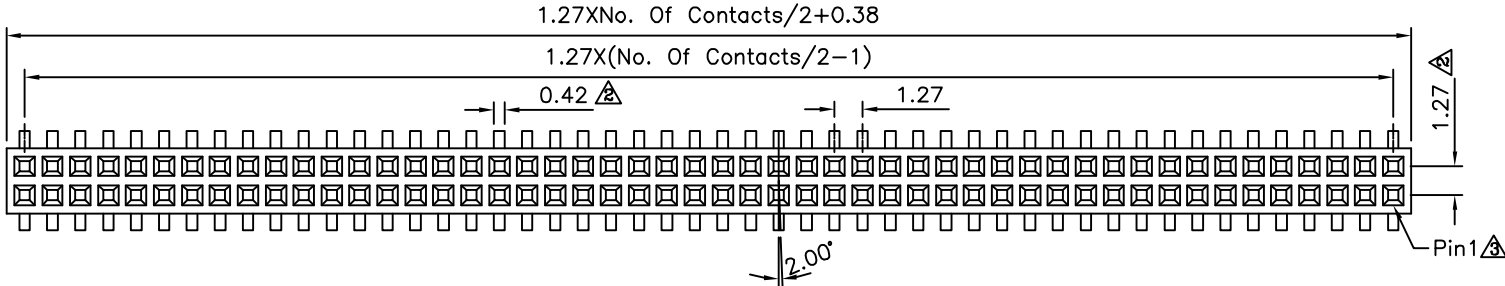

△ SPECIFICATION
Current Rating:1 Amp
Insulation Resistance:5000 Megaohms Min.
Dielectric Withstanding:500V AC
Operating Temperature:−40°C~+105°C
Max. Processing Temperature:
230°C For 30~60 Seconds
(260°C For 10 Seconds)
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
Housing:LCP(UL94V−0),Black
RoHS Compliant

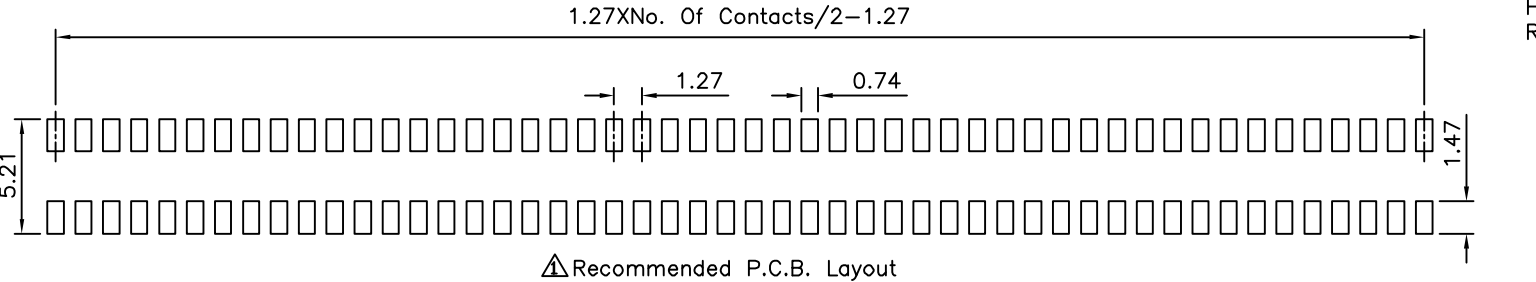

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
18446		DRAWING BY	YBL
		SCALE	NONE
REV.	A3	UNIT	mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
△ X. ±0.20
△ .X ±0.15
△ .XX ±0.10
△ .XXX ±0.05

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	09/26/2013
△ A2		Modify Data	HZF	04/29/2010
△ A1		Modify Data	BECKY	04/11/2006
△ A0		NEW RELEASE	BECKY	04/06/2005