


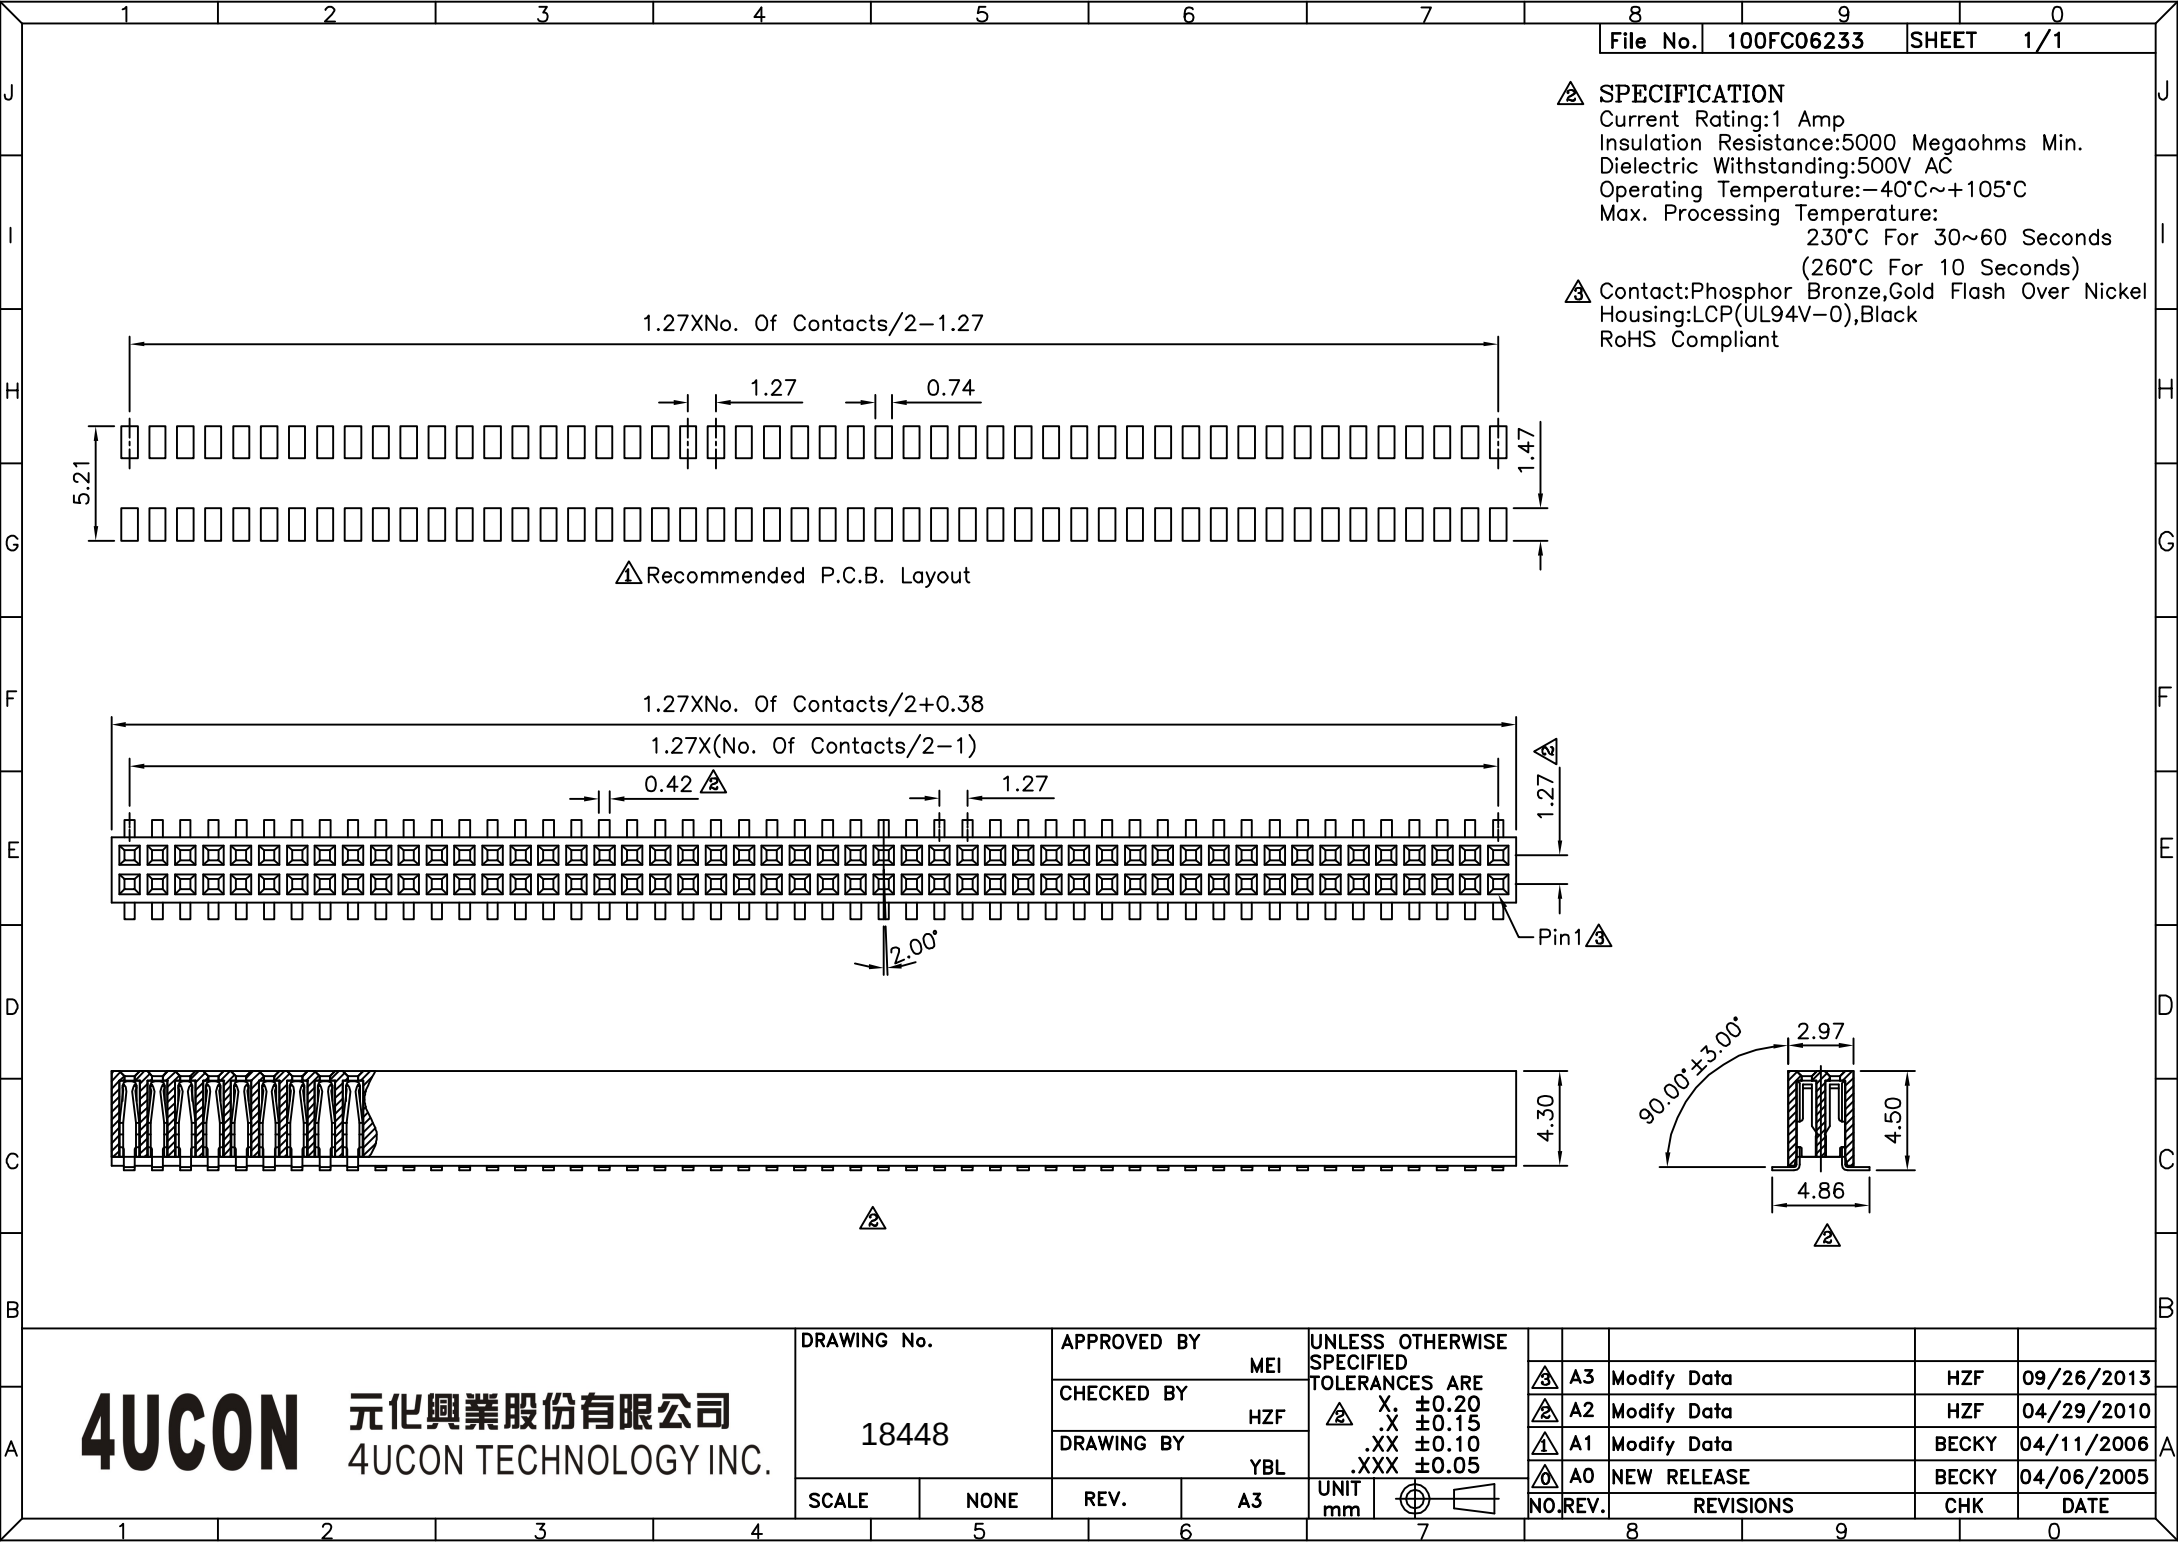

④ SPECIFICATION	
Current Rating:1 Amp	
Insulation Resistance:5000 Megaohms Min.	
Dielectric Withstanding:500V AC	
Operating Temperature:−40°C~+105°C	
Max. Processing Temperature:	
230°C For 30~60 Seconds	
(260°C For 10 Seconds)	
④ Contact:Phosphor Bronze,Gold Flash Over Nickel	
Housing:LCP(UL94V-0),Black	
RoHS Compliant	

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED	
18448		MEI		TOLERANCES ARE	
		CHECKED BY		X. ±0.20	
		HZF		.X ±0.15	
SCALE		DRAWING BY		.XX ±0.10	
		YBL		.XXX ±0.05	
NONE		REV.		UNIT	
		A3		mm	

NO.		REV.		REVISIONS		CHK		DATE	
A3		Modify Data		HZF		09/26/2013			
A2		Modify Data		HZF		04/29/2010			
A1		Modify Data		BECKY		04/11/2006			
A0		NEW RELEASE		BECKY		04/06/2005			