


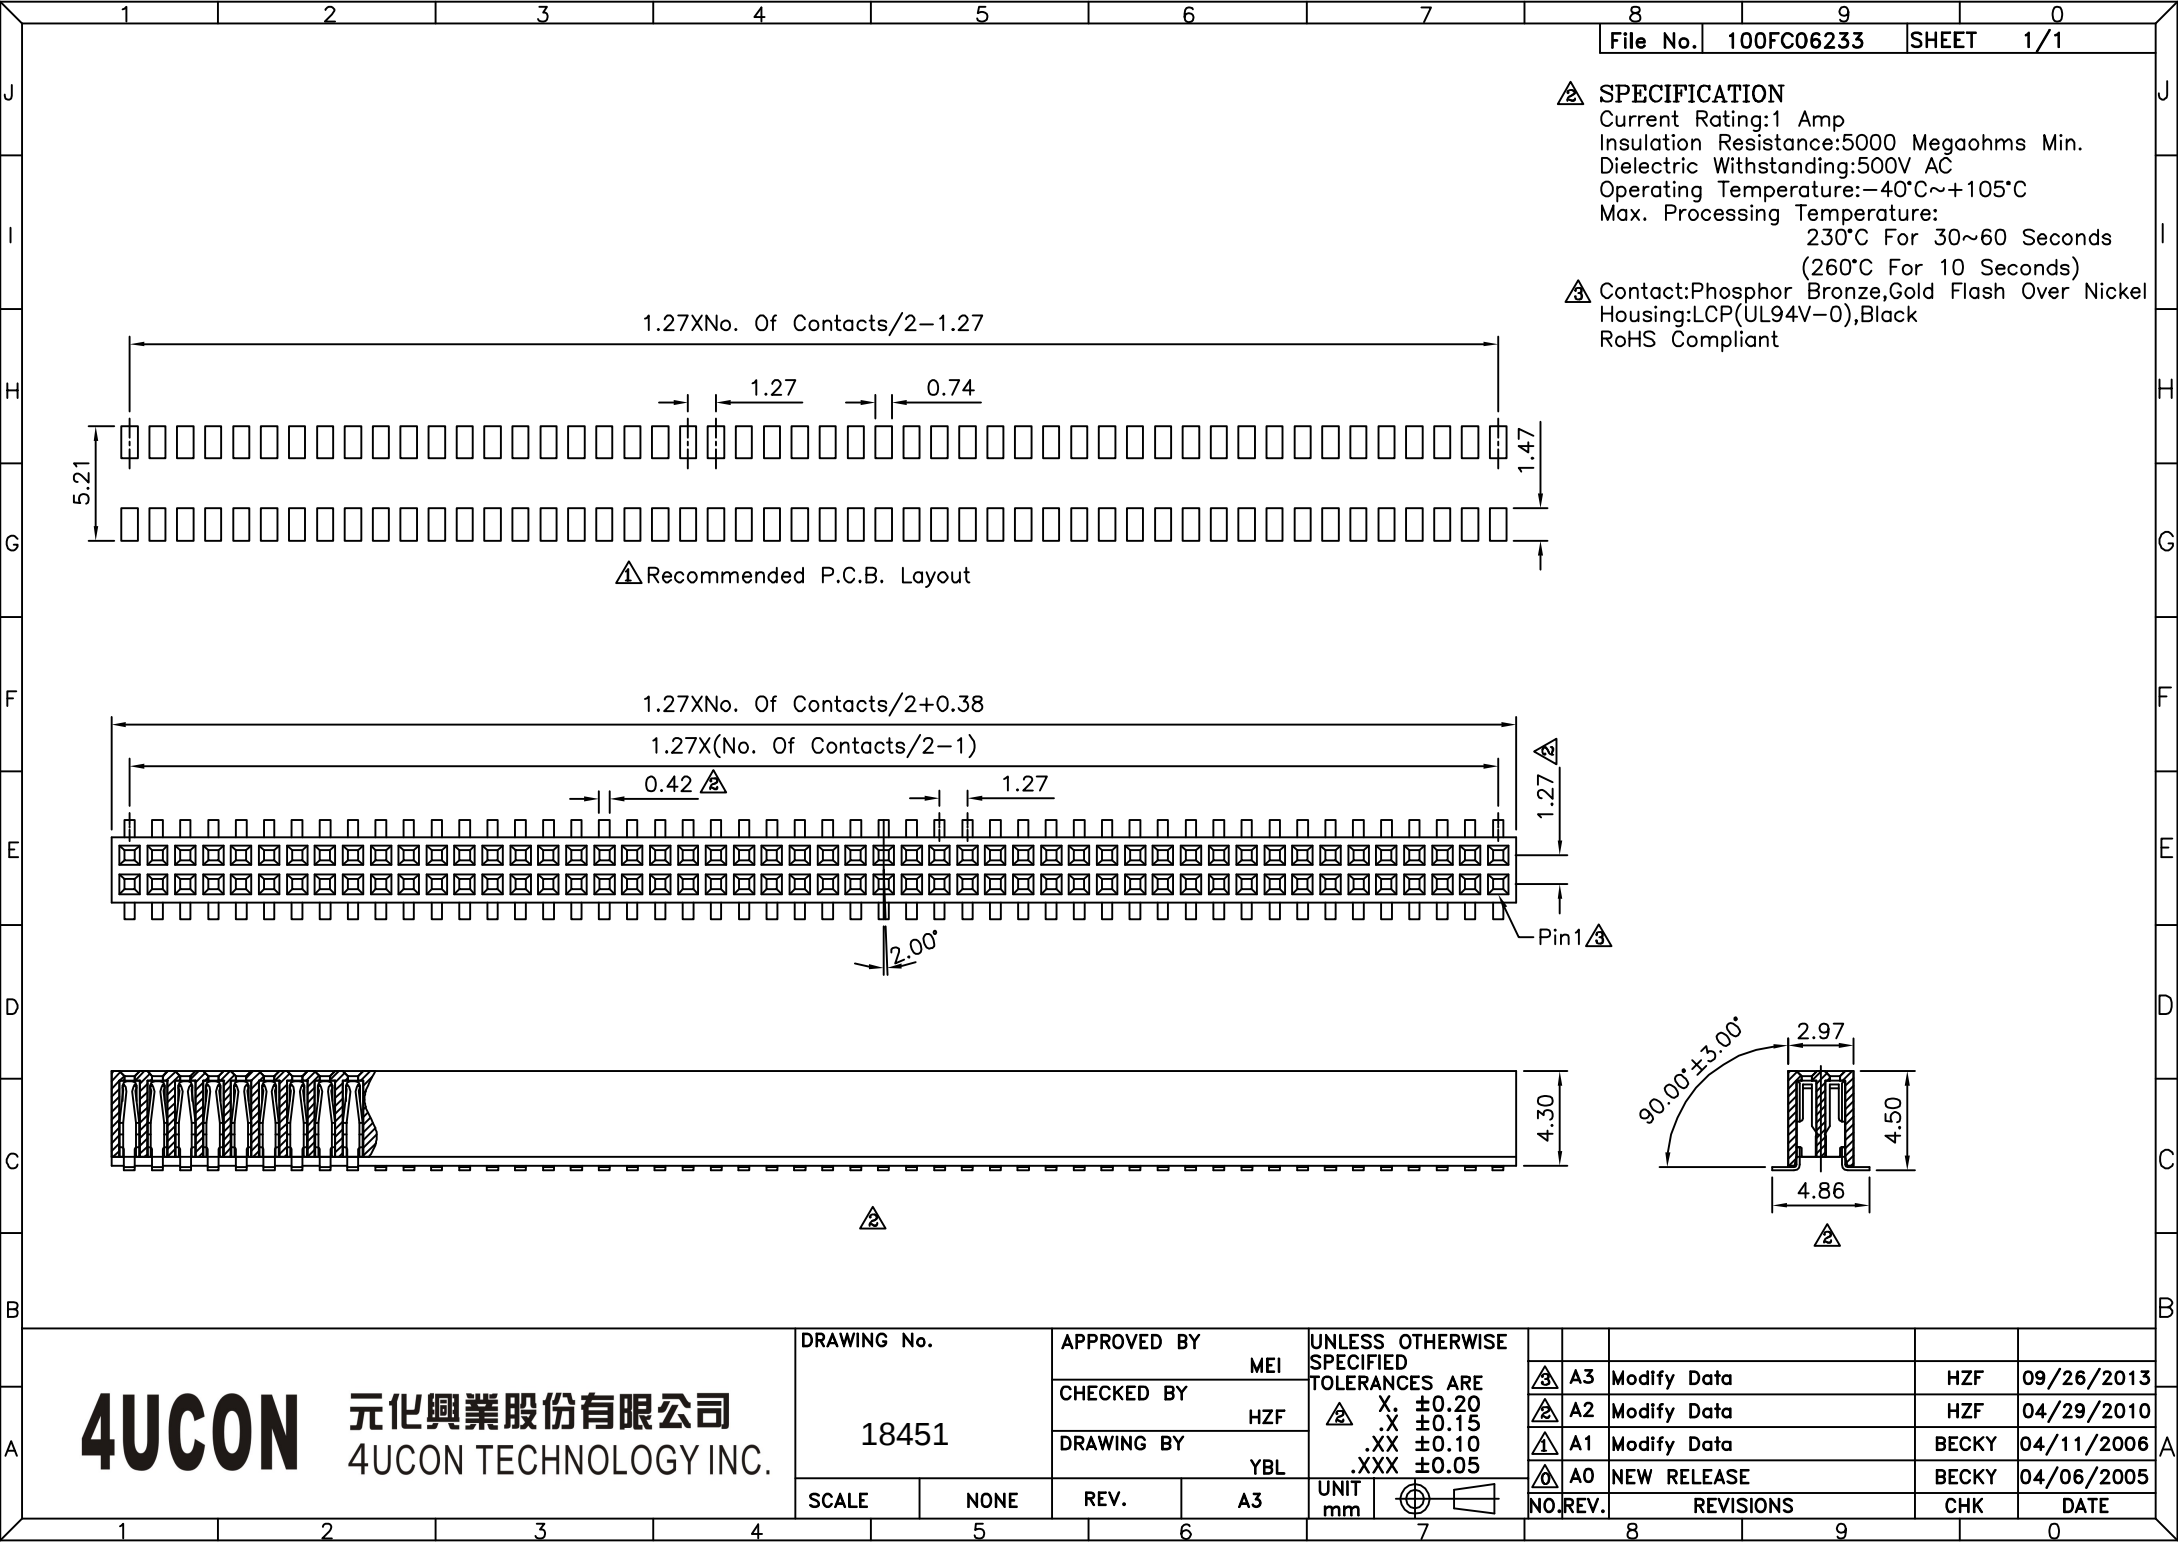

△ SPECIFICATION
Current Rating:1 Amp
Insulation Resistance:5000 Megaohms Min.
Dielectric Withstanding:500V AC
Operating Temperature:−40°C~+105°C
Max. Processing Temperature:
230°C For 30~60 Seconds
(260°C For 10 Seconds)
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
Housing:LCP(UL94V−0),Black
RoHS Compliant

△ Recommended P.C.B. Layout

Pin1△

△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 18451		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.20 .X ±0.15 .XX ±0.10 .XXX ±0.05							
		MEI									
		CHECKED BY									
		HZF									
DRAWING BY		YBL									
SCALE		NONE		REV.	A3	UNIT		NO. REV.	REVISIONS	CHK	DATE
						mm					