

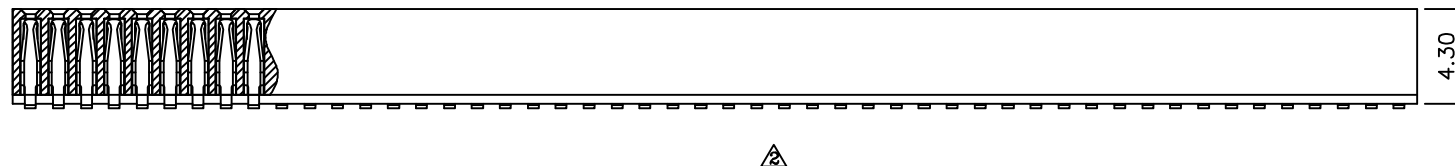
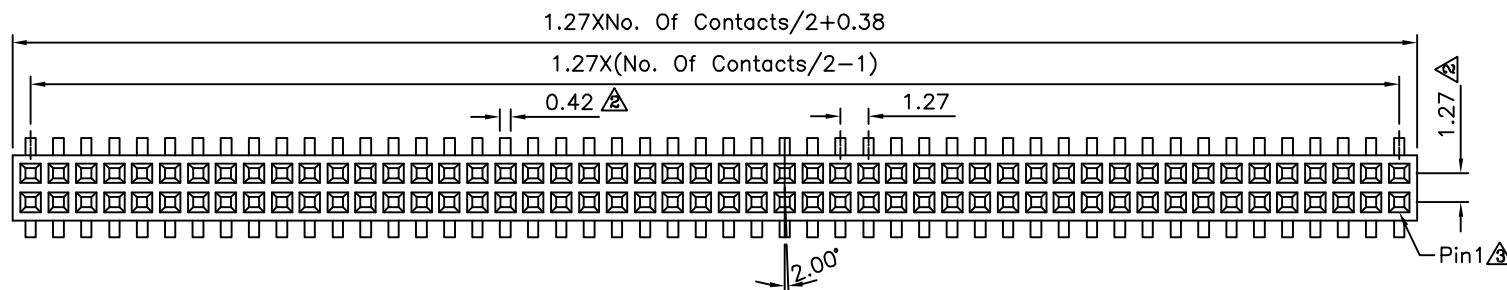


△ SPECIFICATION
 Current Rating:1 Amp
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Withstanding:500V AC
 Operating Temperature:−40°C~+105°C
 Max. Processing Temperature:
 230°C For 30~60 Seconds
 (260°C For 10 Seconds)
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Housing:LCP(UL94V−0),Black
 RoHS Compliant

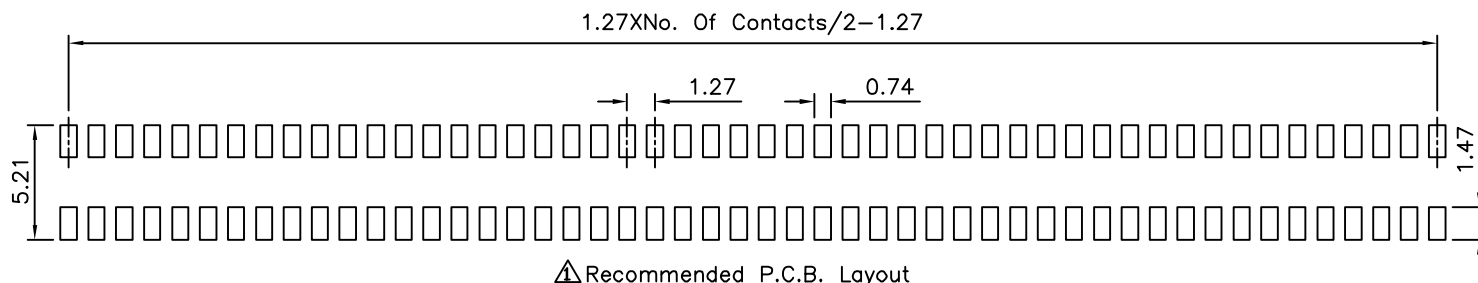

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18468

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

SCALE


NONE

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △ X. ±0.20
 △ .X ±0.15
 △ .XX ±0.10
 △ .XXX ±0.05

UNIT
 mm



3	A3	Modify Data	HZF	09/26/2013
2	A2	Modify Data	HZF	04/29/2010
1	A1	Modify Data	BECKY	04/11/2006
0	A0	NEW RELEASE	BECKY	04/06/2005
NO. REV.		REVISIONS	CHK	DATE