

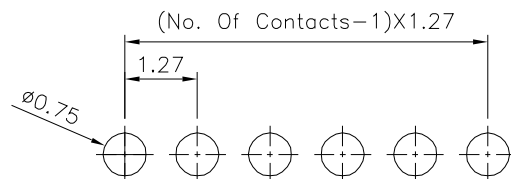
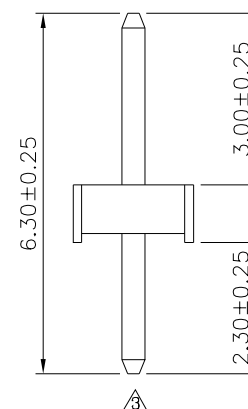


△ SPECIFICATION

Current:1A
 Withstanding Voltage:1000V AC Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

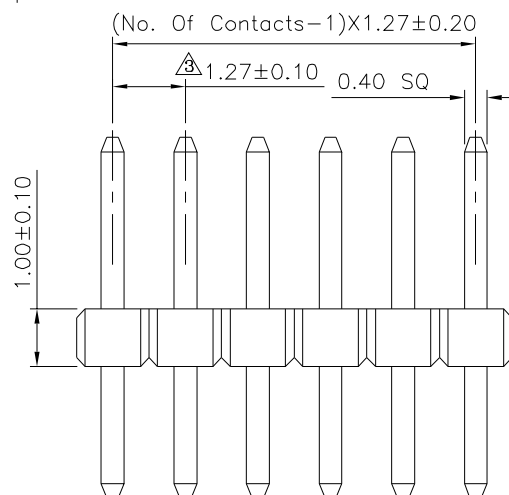

Recommended P.C.B Layout

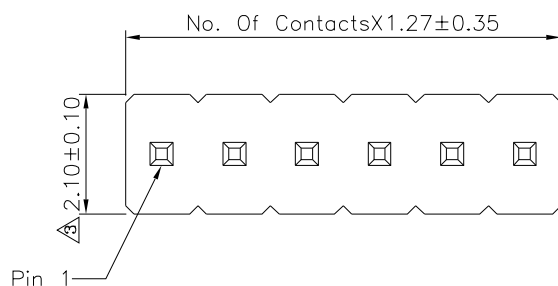

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18614

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

SCALE


NONE

REV.

B3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	11/29/2013
△2	B2	Modify Data	HZF	08/25/2010
△1	B1	Modify Data	HZF	08/15/2009
△0	B0	NEW RELEASE	HZF	07/07/2009