

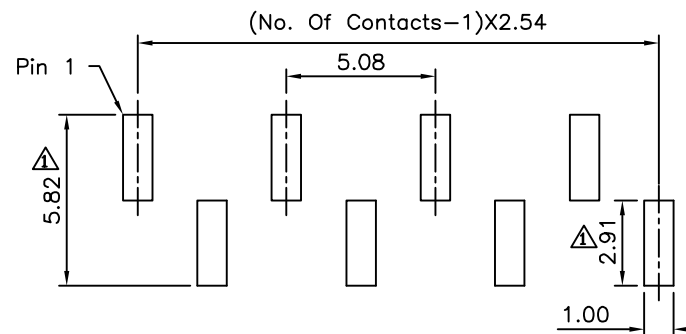
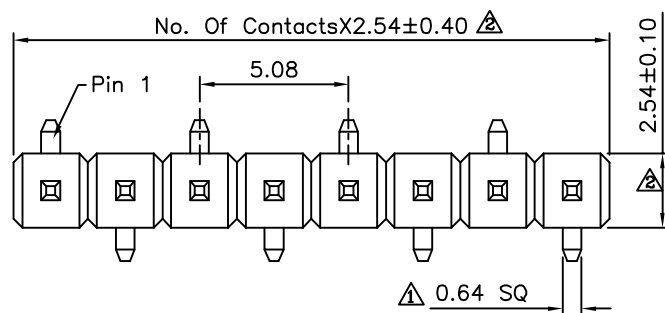


SPECIFICATION

Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

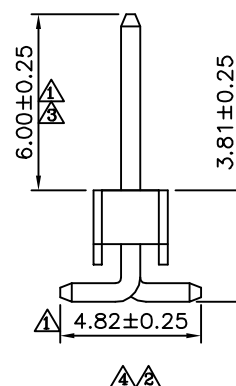

Recommended P.C.B Layout

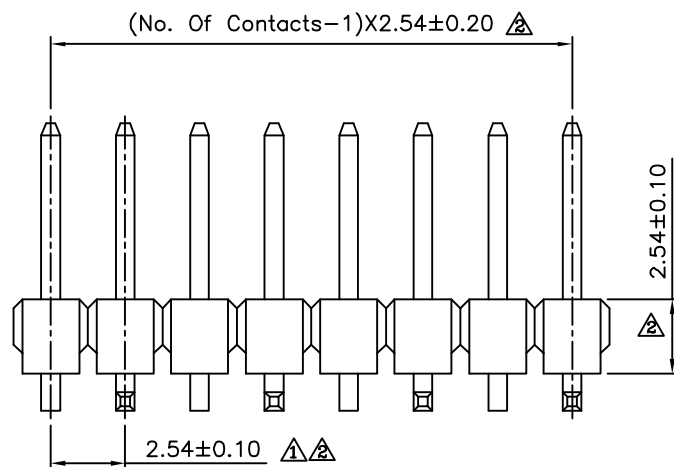

DRAWING No.

18735

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A4


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG ±5°

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	05/13/2013
3	A3	Modify Data	HZF	12/02/2011
2	A2	Modify Data	HZF	07/20/2011
1	A1	Modify Data	HZF	07/21/2009
0	A0	NEW RELEASE	BECKY	10/14/2004

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.