
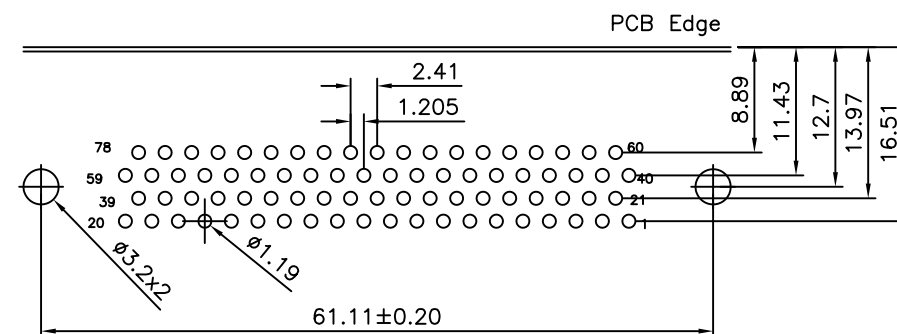
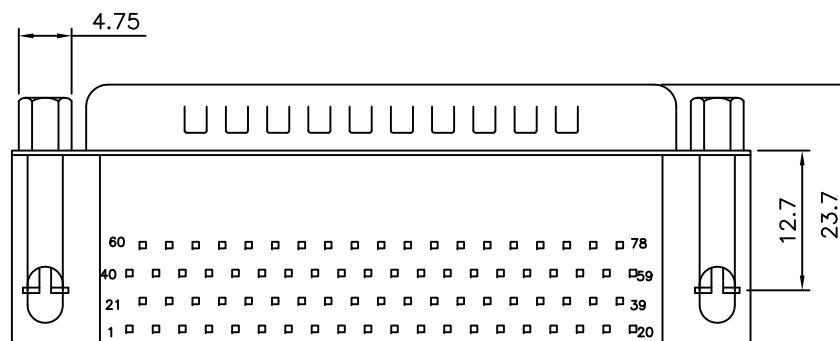
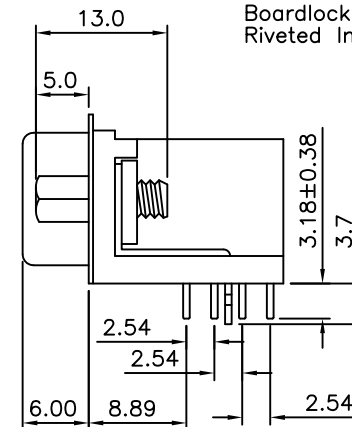


SPECIFICATION

Current Rating:2Amp
 Dielectric Withstanding Voltage:1000V AC For 1Minute
 Insulation Resistance:1000Megohms Min At 500V DC
 Contact Resistance:15Milliohms Max
 Operating Temperature:-55°C~+105°C
 Insulator:PBT,UL 94V-0
 Contact:Copper Alloy
 Contact Finish:Gold On Mating End Tin On Termination End
 With Entire Contact Nickel Underplated
 Shell:Steel
 Boardlock:Brass Tin Plated
 Riveted Insert:Brass Nickel Plated

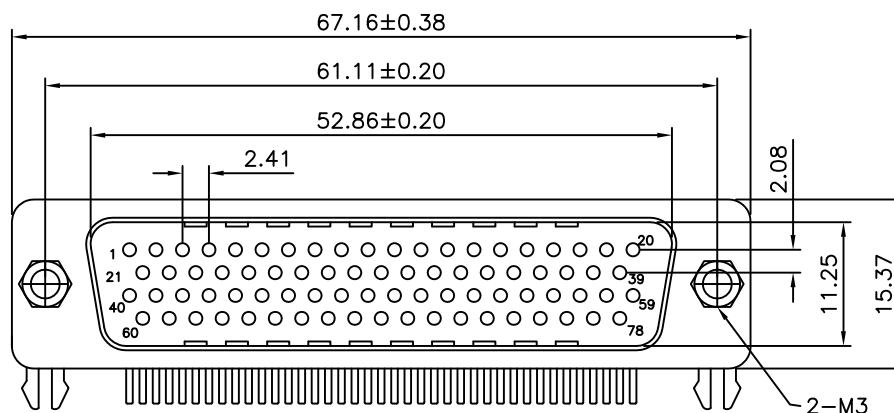

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18747

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

JLT

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 .XXX ±0.05
 ANG: ±1°

UNIT

mm



NO.

REV.

A0 NEW RELEASE

HZF

04/30/2007

REVISIONS

CHK

DATE

SCALE

NONE

REV.

A0

UNIT

mm



NO.

REV.

A0 NEW RELEASE

HZF

04/30/2007

REVISIONS

CHK

DATE