
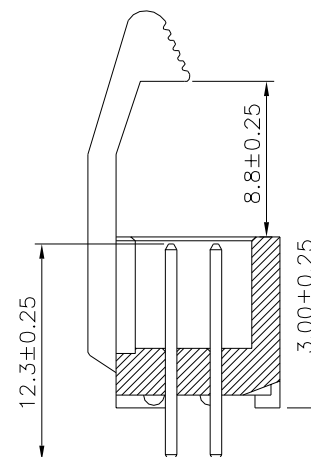
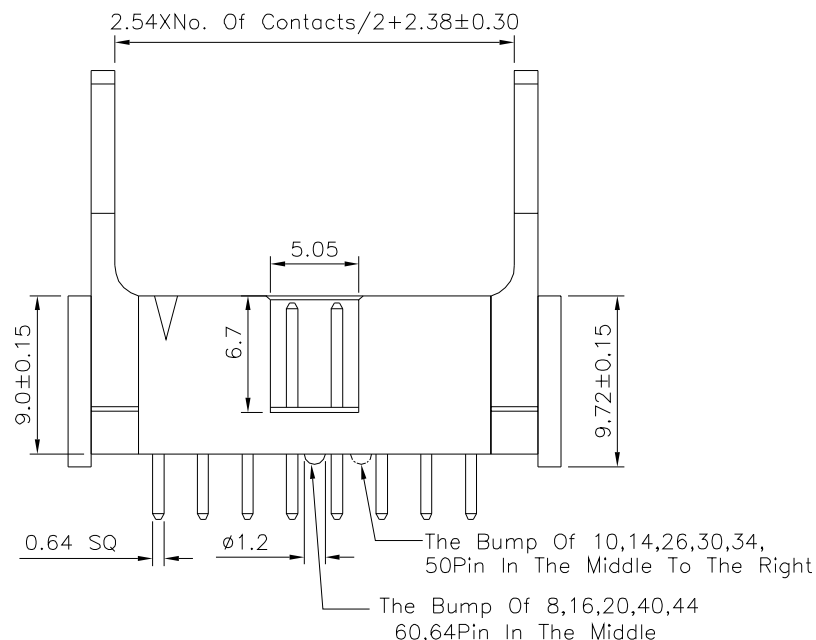
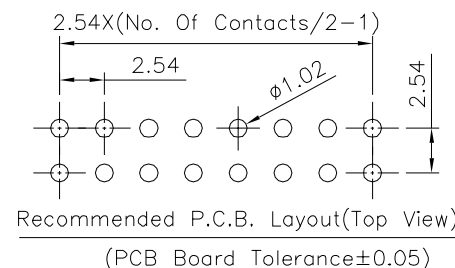


SPECIFICATION

Current Rating:3.0A
 Withstand Voltage:AC 1000V Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 Metal Latch:Zinc Alloy,Nickel Plated
 No. Of Contact:08,10,14,16,20,26,30,34,40,44,50,60,64
 Contacts Are Tooled Already
 RoHS Compliant

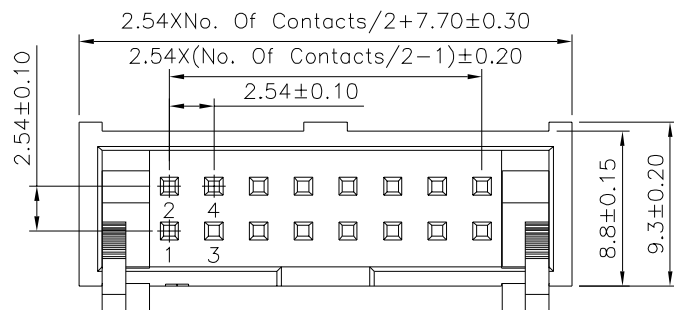

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19043

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X: ±0.25 X*: ±2"
 .X ±0.20 .X* ±1.5"
 .XX ±0.15 .XX* ±1"
 .XXX ±0.10 .XXX* ±0.5"

UNIT

mm



BO

NO.REV.

NEW RELEASE

REVISIONS

HZF

CHK

05/25/2025

DATE