
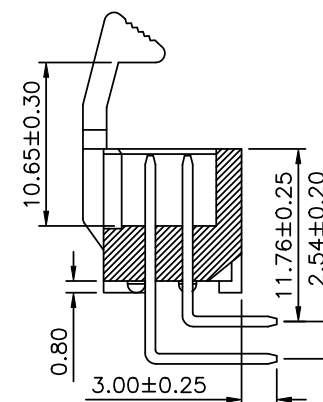
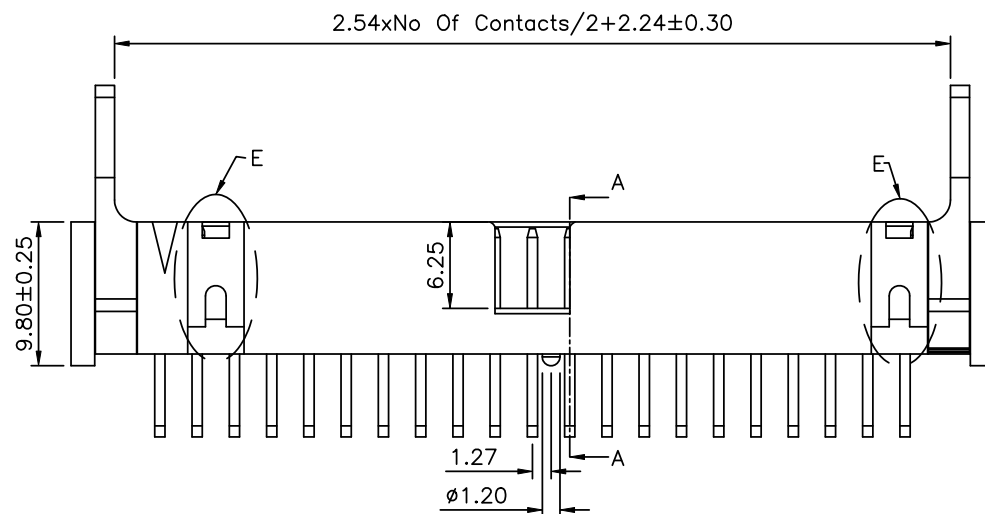


Recommended PCB Layout(Top Side)

PCB Tolerance±0.05

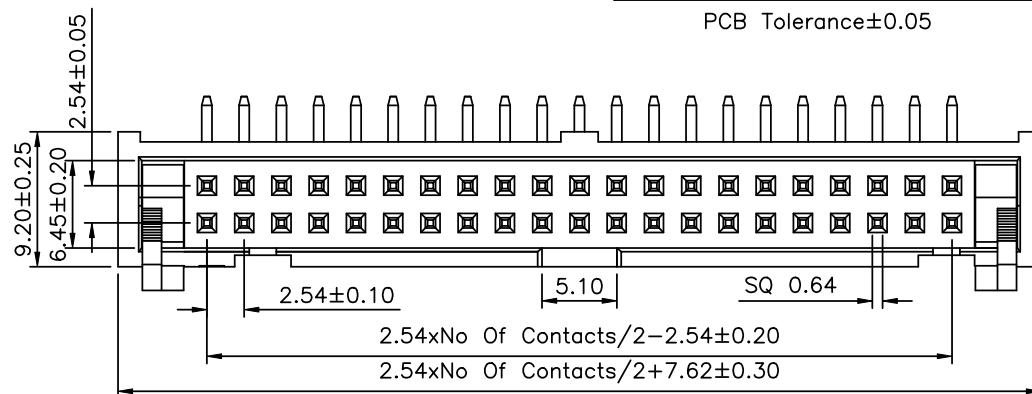

Section A-A

SPECIFICATION

Current Rating:3.0Amp
 Voltage Rating:350V
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohm Min
 Withstad Voltage:1000V AC/Minute
 Operation Temperature:-40°C~+105°C
 Contact Material:Brass
 Contact Plating:Au Over Ni
 Latch Material:Zinc Alloy
 Latch Plating:Ni
 Insulator Material:Polyester(UL94V-0)
 Standard:PBT+30%GF
 Above 26 Poles With "E" Profile

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19070

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

JLT

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG: ±3°

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

11/06/2007

DATE