


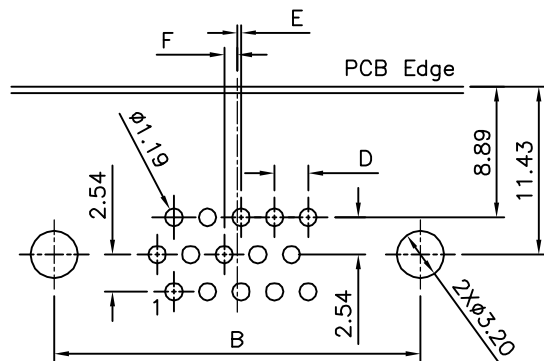


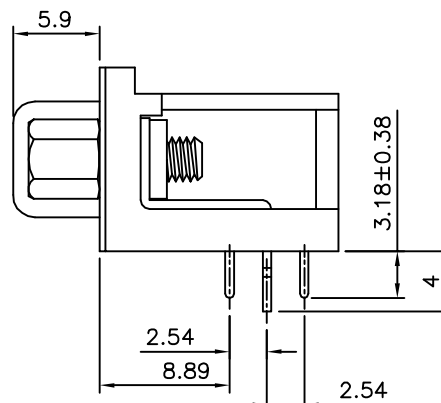

△ Recommended P.C.B. Layout

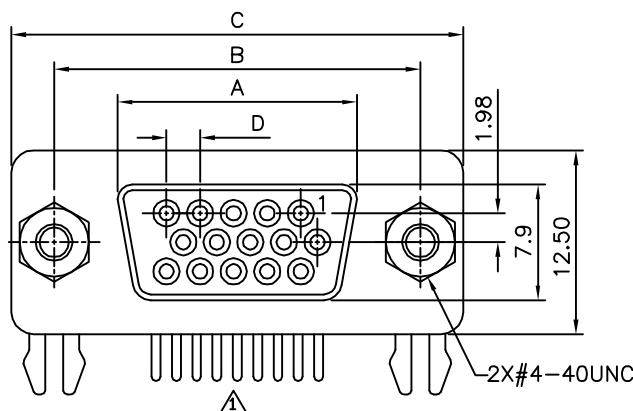

△

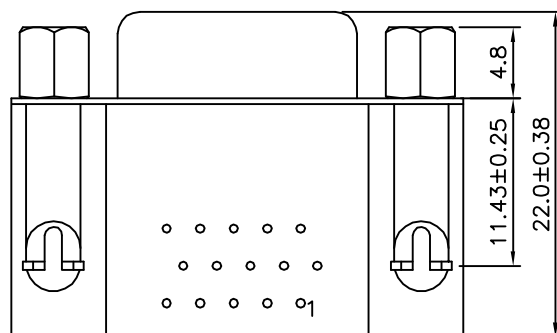

△

△ SPECIFICATION

Current Rating:2 Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Contact Resistance:15 Milliohms Max.
 Operation Temperature:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:Steel,Nickel Plated
 Boardlock:Steel,Tin Plated
 Rivet:Brass,Nickel Plated
 Screw:Steel,Nickel Plated
 RoHS Compliant

△ Pin	A±0.20	B±0.20	C±0.38	D	E	F
15	16.30	25.00	30.80	2.29	0.25	0.89
26	24.60	33.30	39.20	2.29	0.51	0.64
44	38.35	47.05	53.05	2.29	0.51	0.64
62	54.80	63.50	69.40	2.41	0.58	0.62

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19111

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.25
 .XX ±0.15
 .XXX ±0.05
 ANG. ±1°

UNIT
 mm



△ A1

Modify Data

HZF

08/25/2015

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

A1