



△ SPECIFICATION



Current: 3A
 Withstanding Voltage: 1000V AC RMS
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -55°C~+105°C
 Housing: PBT(UL94V-0), Black
 Contact: Copper Alloys, Gold Plated
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

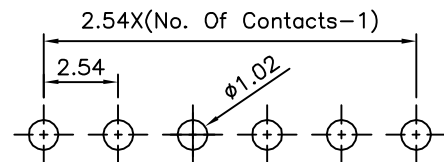

Recommended P.C.B. Layout

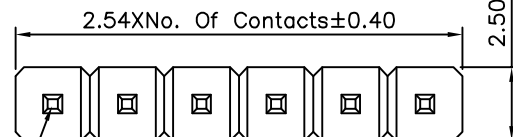

Pin 1

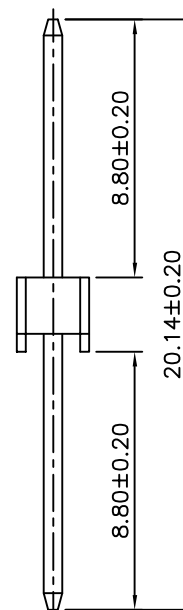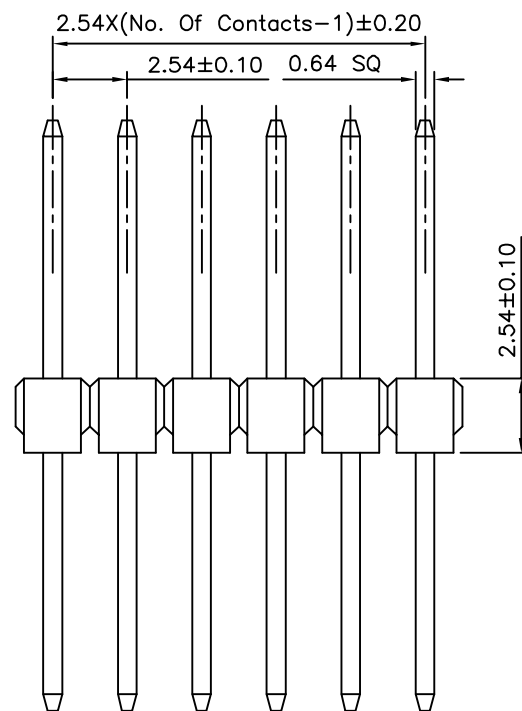

DRAWING No.

19121

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A1


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

△ A1

Modify Data

HZF

08/08/2011

△ A0

NEW RELEASE

HZF

02/05/2008